


FAST AND HIGHLY EFFICIENT, YET COMPACT A4 BLACK AND WHITE PRINTER DELIVERING EXCELLENT PRINT QUALITY OUTPUT

i-SENSYS LBP335dw

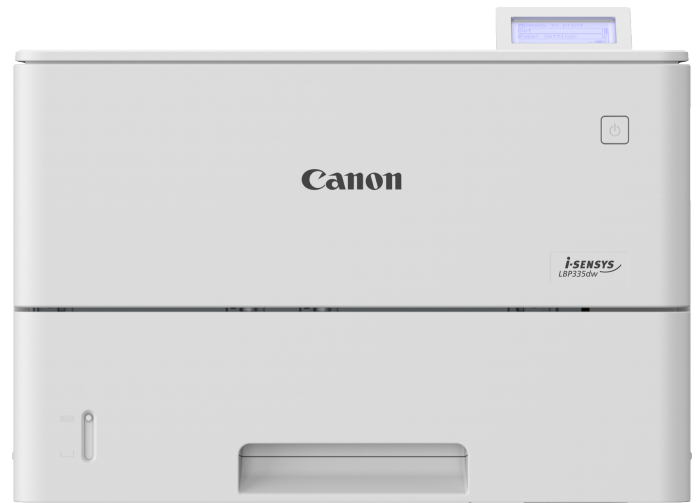

Designed with advantages in print speed, small footprint and high paper capacity, to easily fit and excel in a variety of business environments.

HIGH PRODUCTIVITY

Fast print speeds, support for wide range of media and flexible configuration with up to 2,300 sheets of paper capacity to elevate your business productivity.

SEAMLESS CONNECTIVITY

Fast and secure connectivity, including direct Wi-Fi and Universal Print by Microsoft allowing for maximum print on the go flexibility.

ROBUST SECURITY

Ensuring device, document and network security with Multifactor authentication, device firmware protection and encryption of print jobs to safeguard your business.

PROMOTING SUSTAINABILITY

Reduce your carbon footprint and save your energy costs thanks to low energy consumption. Boost your sustainability efforts further with devices built with 10% of recyclable materials.

TECHNICAL SPECIFICATIONS

i-SENSYS LBP335dw

PRINTER ENGINE	
Print speed	Single sided : Up to 43 ppm (A4) Up to 65.2 ppm (A5-Landscape) Double sided : Up to 36 ipm (A4)
Printing method	Monochrome laser beam printing
Print quality	Up to 1200 x 1200 dpi
Warm-up time	2 Seconds or Less* * Time from device power-on to when key operations can be performed on the touch panel display. From Sleep Mode: 20 Seconds or less
First Page Out Time	Approx: 6.2 seconds or less
Recommended Monthly Print Volume	2,000 - 7,500 pages per month
Duty cycle	150,000 pages ¹
Print margins	5 mm-top, bottom, left and right 10 mm-top, bottom, left and right (Envelope)
Advanced printing features	Encrypted Secure Print Secure Print Print from USB memory key (JPEG/TIFF/PDF/XPS) Barcode Print ² iOS: AirPrint, Canon PRINT app Android; Mopria certified, Canon Print Service Plug-in, Canon PRINT app Microsoft Universal Print, IPP everywhere
MEDIA HANDLING	
Paper input (Standard)	550-sheet cassette 100-sheet multi-purpose tray
Paper input (Option)	550-sheet cassette x 3
Maximum paper input capacity	Up to 2,300 sheets
Paper output	150-sheet
Media types	Plain paper, Recycled paper, Heavy Paper, Thin paper, Color paper, Label, Letterhead, Post card, Envelope
Media sizes	Cassette (Standard and optional): A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Custom sizes: Min. 105 x 148 mm Max. 216.0 x 355.6 mm. Multi-purpose tray: A4, A5, A5 (Landscape), A6, B5, Legal, Letter, Executive, Statement, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, Foolscap, 16K, Indexcard, Envelope (COM10, Monarch, C5, DL), Custom sizes: Min 76.2 x 127 mm Max. 216.0 x 355.6 mm

Media weights	Cassette (standard and optional): 60 to 120 g/m ² Multi-purpose tray: 60 to 200 g/m ²
Double sided printing	A4, Legal, Letter, OFFICIO, B-OFFICIO, M-OFFICIO, GLGL, Foolscap Custom size - Min. 210 x 279.4 mm Max. 216.0 x 355.6 mm 60 to 120 g/m ²
GENERAL FEATURES	
Power requirements	220-240V(±10%) 50/60Hz (±2Hz)
Power consumption	Maximum: Approx. 1,400 W Active printing: Approx. 507W Standby: Approx. 6.7 W Sleep mode: Approx. 0.59 W Typical Electricity Consumption (TEC): 0.35 kWh/week (230V) ⁹ For detailed information relating to Lot26 regulation, please go to: http://www.canon-europe.com/For_Work/Lot26/index.aspx
Noise level	Sound Pressure ⁵ : Active: 54 dB Standby: 24 dB Sound Power ⁵ : Active: Duplex 68dB / Simplex 69dB Standby: 37 dB
Dimensions (W x D x H)	409 mm x 376 mm x 275 mm
Weight	Approx. 16 Kg
Operating environment	Temperature: 10 to 30°C (50 to 86°F) Humidity 20 to 80% RH (no condensation)
Control panel	5 Line LCD, 3 LED (Job, Error, Energy saver), Buttons, 10-key numeric keypad
CONTROLLER	
Processor Speed	1.6GHz Dual Core Processor and 800MHz Single Core Processor
Memory	2GB
Storage	32GB eMMC
Printer Languages	UFR II, PCL 5e ⁴ , PCL6, Adobe® PostScript ³
Fonts	93 PCL fonts (93 Roman, 10 Bitmap fonts, 2 OCR fonts) Andalé Mono WT J/K/S/T (Japanese, Korean, Simplified and Traditional Chinese)* ³ Barcode Fonts* ² 136 PostScript fonts
Interface and connectivity	USB 2.0 Hi-Speed, 10BASE-T/100BASE-TX/1000Base-T, Wireless 802.11b/g/n, Wireless Direct Connection

TECHNICAL SPECIFICATIONS

i-SENSYS LBP335dw

Network Protocol	Print: TCP/IP (LPD/Port9100/IPP/IPPS/FTP/WSD) Management: SNMPv1, SNMPv3 (IPv4,IPv6) Security : TLS1.3, IPsec, IP/Mac address filtering, IEEE802.1X, SNMPv3, SSL (HTTPS, IPPS) Security (wireless): Infrastructure Mode: WPA-PSK(AES), WPA2-PSK(AES), WPA3-SAE (AES), WPA-EAP(AES), WPA2-EAP(AES), WPA3-EAP(AES) Access Point Mode: WPA2-PSK(AES), WPA3-SAE (AES)
Software and Printer Management	Remote User Interface (RUI), Remote Operation Viewer, Department ID Management, Toner Status Tool, iW Enterprise Management Console: Server-based software for centralised management of a fleet of devices Cooperating with External Security Audit System (Security Information and Event Management) eMaintenance: embedded RDS allows remote eMaintenance services such as meter capture, automatic consumables management and remote diagnostics.
Operating Systems Compatibility	Windows® 11 / Windows® 10 / Server® 2025 / Server® 2022 / Server® 2019 / Server® 2016 Mac OS X version 10.15 & up Linux®
CONSUMABLES	
All-in-One cartridges	Cartridge 056L (5,100 pages ^{a)}₉ Cartridge 056 (10,000 pages ^{a)}₉ Cartridge 056H (21,000 pages ^{a)}₉
ACCESSORIES/ OPTIONS	
Items	Paper Feeder PF-C1 (550-sheet cassette) Plain Pedestal V2 Plain Pedestal AB1 Barcode Printing Kit-D1 (Enables barcode printing capability) PCL Font Set-A1 (Enables Unicode printing capability on SAP and supports Andale font)

Notes:

- [1] Duty cycle is defined as the maximum number of printed pages for a single peak month. Any usage above the recommended duty cycle may decrease the life of the product
- [2] Accessory - Barcode Printing Kit-D1 - is required
- [3] Accessory - PCL FONT SET-A1E - is required
- [4] A Canon PCL5e driver is not supplied, however PCL5e commands are supported on the device.
- [5] Declared noise emission in accordance with ISO 9296
- [6] Inaudible means that the emission sound pressure level for a bystander is lower than absolute standard for background noise in accordance with ISO 7779
- [7] Web distribution only
- [8] Based on ISO/IEC 19752
- [9] Printer ships with starter cartridge (Black: 5,100 pages)
- [10] As per US ENERGY STAR® version3.2.

i-SENSYS LBP335dw



Canon UK Ltd.
4 Roundwood
Avenue
Stockley Park
Uxbridge
UB11 1AF
canon.co.uk

Canon Ireland Ltd.
3090 Lake Drive
Citywest Business
Campus
Saggart, Co. Dublin
D24 XN47
canon.ie