


VG2440 - 24" 1080P ERGONOMIC 40-DEGREE TILT MONITOR WITH HDMI, DP, AND VGA

Key Features

- 24 Inch Full HD (1920x1080p) LED monitor with 60Hz refresh rate
- Advanced ergonomics (40-degree tilt, swivel, rotate and height) for all-day comfort
- Flicker-Free technology and Blue Light Filter for reduced eye fatigue
- The VG2440 supports laptops, PCs, Macs and more with HDMI, USB, DisplayPort, VGA inputs

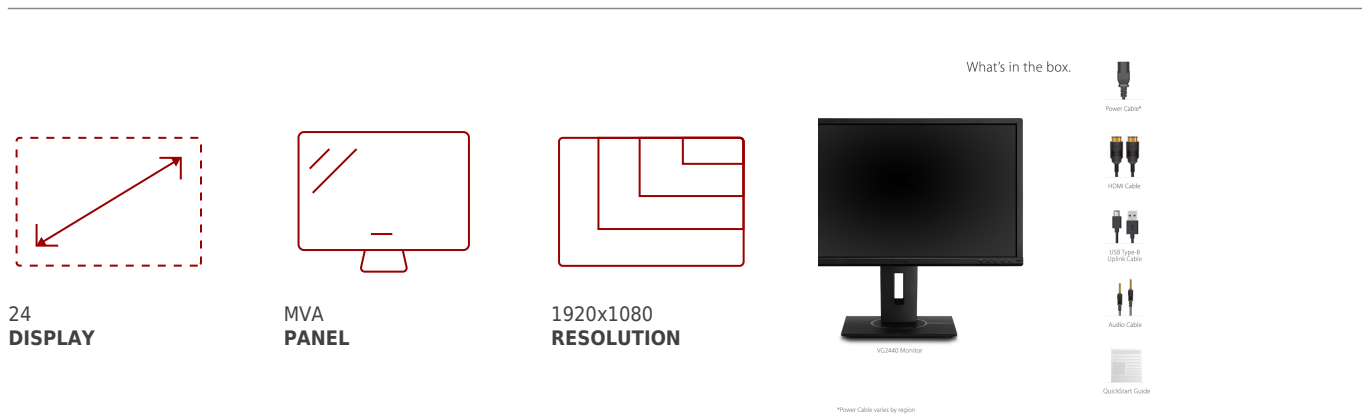


Product Description

The ViewSonic® VG2440 is a 24" (23.6" viewable) Full HD monitor that includes a full-range of connectivity and ergonomic functionality ideal for your workstation at the office and at home. With SuperClear® MVA panel technology for wide-angle viewing, and an 8-bit panel with the ability to reproduce 16.7M colors, this monitor delivers incredibly sharp images. Integrated with HDMI, DisplayPort, VGA and 3 USB ports, the VG2440 allows flexible connection to PC systems, laptops and other peripheral devices and accessories. ViewSonic's exclusive vDisplayManager software provides intuitive presets that deliver optimized screen performance in different applications. In addition, Flicker-Free and Blue Light Filter technology help to eliminate eye strain from extended viewing periods.

Specifications

Screen Size	24
Viewable Area (in.)	23.6
Panel Type	MVA
Display Resolution	1920 x 1080
Display Resolution	Full HD (1920x1080)
Static Contrast Ratio	3,000:1
Light Source	LED
Brightness	250 cd/m2
Colors	16.7M
Color Space Support	8 bits
Aspect Ratio	16:9
Response Time (Typical GTG)	5ms
Viewing Angles	178º horizontal, 178º vertical
Panel Surface	Anti-glare, Hard coating (3H)
PC Resolution (max)	1920x1080
Mac® Resolution (max)	1920x1080
USB Type A	1
USB Type B	3
3.5mm Audio In	1
3.5mm Audio Out	1
VGA	1
HDMI 1.4 In	1
DisplayPort	1
Internal Speakers	2W (x2)
Eco Mode (Conserve)	11.8W
Eco Mode (optimized)	13.1W
Consumption (typical)	14.8W
Consumption (max)	16.2W
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.5W
Power Supply	Internal
Cable Organization	No
Kensington Lock Slot	1
Physical Controls	1,2,3,4,5,6 (Power)
On Screen Display	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	HDMI (v1.4): 15 ~ 90 KHz, DisplayPort: 15 ~ 90 KHz
Frequency Vertical	HDMI (v1.4): 49 ~ 75 Hz, DisplayPort: 49 ~ 75 Hz
Digital Sync	TMDS for HDMI (v1.4), PCI-E for DisplayPort
Height Adjust	130 mm / 5.1 in
Swivel	120º
Pivot (Right/Left)	90º / 90º
Tilt (Forward/Back)	5º / 40º
Net (lbs)	12.9
Net Without Stand (lbs)	8.5
Gross (lbs)	18.7
Net (kg)	5.8
Net Without Stand (kg)	3.4
Gross (kg)	8.5
Packaging (in.)	24.0 x 15.9 x 8.3
Physical (in.)	21.6 x 15.1~20.2 x 8.1
Physical Without Stand (in.)	21.6 x 12.9 x 2.0
Packaging (mm)	609.0 x 405.0 x 210.0
Physical (mm)	549.0 x 384.0~513.0 x 206.0
Physical Without Stand (mm)	549.0 x 329.0 x 50.0
Regulations	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, MX-CoC, Mexico Energy
PACKAGE CONTENTS	VG2440 Display, Power Cable, HDMI Cable, USB Type, B Uplink Cable, 3.5mm Audio Cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
UPC: 766907010329	



Contact Sales
ViewSonic.com
 888.881.8781
 email:
salesinfo@viewsonic.com