



VX1655-4K-OLED - 15.6" UHD OLED PORTABLE MONITOR WITH 60W USB C AND MINI HDMI

Key Features


- Streamlined Design for Optimized Functionality
- Portable Powerhouse
- On-the-Go Charging
- Beautiful Visual Performance
- Versatile Connectivity
- Wide Color Gamut
- Dual Integrated Speakers
- 3-year Limited Warranty




16
DISPLAY



OLED
PANEL



3840 X 2160
RESOLUTION

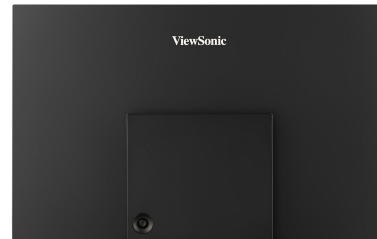

Product Description

The ViewSonic® VX1655-4K-OLED is a 15.6" portable monitor with native 4K resolution and advanced OLED technology for incredible visual performance on the go. Stunning 4K Ultra HD resolution delivers four times more pixels than Full HD monitors, so you can have the clarity and precision you need for work and play. An ultra-thin panel with the hardware integrated into the kickstand provides incredible stability, discreetly hides cable connectivity, and still allows for use in portrait and landscape modes. In addition, versatile connectivity options include two USB-C ports for 2-way charging, as well as mini-HDMI and a headphone jack. Measuring less than an inch thick and weighing under two pounds, the ultra-slim VX1655-4K-OLED perfectly fits into any bag, briefcase, or backpack so you can work wherever life takes you.

Specifications

	More Information
UPC	766907022742
Screen Size	16
Viewable Area (in.)	15.6
Panel Type	OLED
Display Resolution	3840 x 2160
Display Resolution	4K (3840x2160)
Static Contrast Ratio	100,000:1 (typ)
Dynamic Contrast Ratio	80,000,000:1
Brightness	400 cd/m2
Colors	1.07B
Aspect Ratio	16:9
Response Time (Typical GTG)	1ms
Viewing Angles	170° horizontal, 170° vertical
Backlight Life (Hours)	30,000
Panel Surface	Glossy
Refresh Rate	60Hz
PC Resolution (max)	3840 X 2160
Mac® Resolution (max)	3840 X 2160
USB Type C	2
3.5mm Audio Out	1
Mini HDMI 2.0	1
Internal Speakers	0.8W (x2)
Eco Mode (Conserve)	19w
Eco Mode (optimized)	22w
Consumption (typical)	25w
Consumption (max)	24w
Voltage	100-240 VAC, 50-60Hz
Stand-by	0.5w
Power Supply	External
Cable Organization	No
Physical Controls	Up, Right, Down, Left, Power
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Temperature	32-104° F (0 - 40° C)

Humidity (non-condensing)	20-90%
Frequency Horizontal	mini HDMI 2.0: 15 ~ 160 KHz USB Type C: 15 ~ 160 KHz
Frequency Vertical	mini HDMI 2.0: 40 ~ 75 Hz USB Type C: 40 ~ 60 Hz
Tilt (Forward/Back)	15° - 43°
Net (lbs)	1.5
Gross (lbs)	3.7
Net (kg)	0.68
Gross (kg)	1.7
Packaging (in.)	16.2 " (W) x 15.4 " (H) x 3 " (D)
Physical (in.)	13.9 " (W) x 8.78 " (H) x 0.6 " (D)
Packaging (mm)	412 mm (W) x 391 mm (H) x 77 mm (D)
Physical (mm)	352 mm (W) x 223 mm (H) x 16 mm (D)
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, NOM, Mexico Energy
Package Contents	LCD Display, Power Adapter, mini HDM lto HDMI Cable, USB type-C to type-C cable, Cover, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight

UPC: 766907022742



Contact Sales
ViewSonic.com

888.881.8781
 email:
salesinfo@viewsonic.com