



Key Features

Amazing color accuracy | Professional Color processing | vDisplay Manager with Color Sensitivity Mode | Reduce Clutter with Single-Cable Solution (USB-C) | Excellent screen uniformity



Product Description


The ViewSonic® VP2468a is a 24" (23.8" viewable) Full HD monitor that delivers color accuracy crucial for professional applications. With a sleek frameless design and edge-to-edge SuperClear® IPS panel, this monitor provides an incredible viewing experience ideal for content creation and enterprise workstations. USB-C connectivity helps to simply your workspace by delivering audio, video, data and up to 65W of power delivery over a single universal cable. In addition, DisplayPort out enables seamless daisy chaining to a second monitor. To ensure precise, uniform color, each of our monitors is factory calibrated to deliver an amazing Delta E<2 value for superior color accuracy. An integrated color uniformity function ensures consistent chromaticity across the screen, while a 14-bit 3D look-up table generates a stunningly smooth palette of 4.39 trillion colors. Add to that 6-axis color adjustment functionality, and this monitor provides the ultimate color processing capability for professional applications. Hardware calibration is available with the optional ViewSonic Colorbration Kit, which allows you to quickly and easily calibrate the monitor for photography, graphic design, content creation, and other color-critical applications.

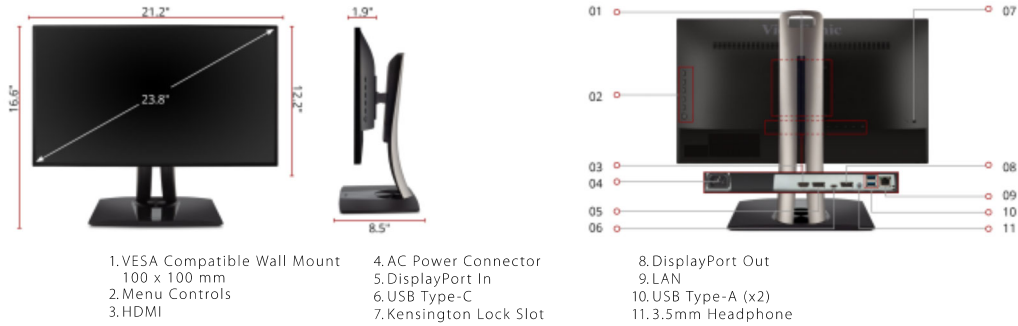

24"
DISPLAY



IPS
PANEL



1920 x 1080
RESOLUTION

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type:	IPS
Resolution:	1920 x 1080
Resolution Type:	Full HD (1920x1080)
Static Contrast Ratio:	1,000:1
Light Source:	LED
Brightness:	250 cd/m2
Colors:	16.7M
Color Space Support:	8 bits
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	Anti-glare, Hard coating (3H)

Compatibility:

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080

Connector:

USB 2.0 Type A(2), USB 2.0 Type B(1), USB 3.1 Type C(1), Ethernet LAN (RJ45)(1), HDMI 1.4 In(1), Display Port(1), Display Port Out(1)

Power:

Eco Mode (Conserve):	17W
Eco Mode (optimized):	19W
Consumption (typical):	22W
Consumption (max):	25W
Voltage:	AC 100-240V (universal), 50-60Hz
Stand-by:	0.3W
Power Supply:	Internal

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Controls:

Physical Controls:	1,2,3,4,5,6 (Power)
On Screen Display:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	20-90%

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

Video Signal:

Frequency Horizontal:	15 ~ 90 KHz
Frequency Vertical:	24 ~ 75 Hz

Ergonomics:

Height Adjust:	130 mm / 5.1 in
Swivel:	60°
Tilt (Forward/Back):	6° / 21°

Weight (imperial):

Net (lbs):	12.5
Net Without Stand (lbs):	7.0
Gross (lbs):	17.1

Weight (metric):

Net (kg):	5.7
Net Without Stand (kg):	3.2
Gross (kg):	7.8

Dimensions (imperial) (WxHxD):

Packaging (in.):	25.6 x 16.2 x 10.6
Physical (in.):	21.2 x 16.6 x 8.5
Physical Without Stand (in.):	21.2 x 12.2 x 1.9

Dimensions (metric) (WxHxD):

Packaging (mm):	650.0 x 412.0 x 270.0
Physical (mm):	539.0 x 422.0 x 215.0
Physical Without Stand (mm):	539.0 x 311.0 x 48.0

General:

Regulations: cTUVus, FCC-B, ICES003, Energy Star, EPEAT, MX-CoC, Mexico Energy

PACKAGE CONTENTS: VP2468a Display, Power Cable, DP to DP Cable, USB Type C cable, USB Type B Uplink Cable, Quick Start Guide

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907009477

Accessories:

LCD-CMK-001, LCD-DMA-001, LCD-DMA-002, LCD-WMK-001