

Key Features

SuperClear IPS Panel Technology | Two Monitors in a Single Package |


Seamless Viewing Experience | Environmentally Friendly Packaging |

Loaded with Connectivity



Product Description


Designed for the modern day office, the ViewSonic® VG2448_H2 dual monitor pack delivers an efficient end-to-end enterprise experience. From easy installation, to recycling, to long-term reliability, this dual monitor solution reduces the total cost of ownership beyond the initial purchase price. Sold as a dual pack of monitors without monitor stands, the VG2448_H2 ships in biodegradable packaging to minimize recycling costs and waste. Standard VESA-compatible mounting offers easy dual-screen installation. SuperClear® IPS panel technology delivers wide-angle viewing and incredibly vivid colors. A variety of input options include VGA, HDMI, DisplayPort and USB 3.0 to deliver both legacy and future-proof connectivity.

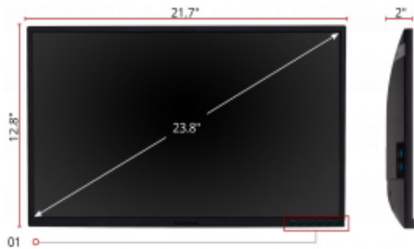


Menu Control Panel
VESA Compatible Wall Mount
(100 x 100 mm)
USB 3.0 Type A (x2)
Kensington® Lock Slot



Internal Speakers
VGA
USB 3.0 Type B
USB 3.0 Type A (x2)
HDMI 1.4

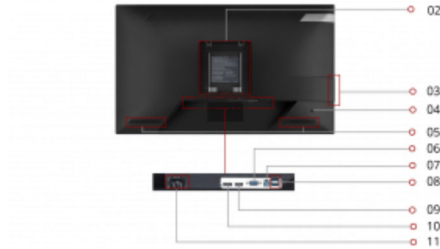


DisplayPort In
AC In



24"
DISPLAY



IPS
PANEL



1920 x 1080
RESOLUTION

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

| | |
|------------------------------|--------------------------------|
| Display Size (in.): | 24 |
| Viewable Area (in.): | 23.8 |
| Panel Type: | IPS |
| Resolution: | 1920 x 1080 |
| Resolution Type: | 1080p |
| Static Contrast Ratio: | 1,000:1 |
| Dynamic Contrast Ratio: | 50,000,000:1 |
| Light Source: | WLED |
| Brightness: | 250 cd/m2 |
| Colors: | 16.7M |
| Color Space Support: | 6 bits |
| Aspect Ratio: | 16:9 |
| Response Time (Typical GTG): | 14ms |
| Response Time (GTG w/OD): | 5ms |
| Viewing Angles: | 178° horizontal, 178° vertical |
| Backlight Life (Hours): | 30,000 |
| Panel Surface: | Anti-glare, Hard coating 3H |

Compatibility:

| | |
|------------------------|-----------|
| PC Resolution (max): | 1920x1080 |
| Mac® Resolution (max): | 1920x1080 |

Connector:

USB 3.0 Type A(4), USB 3.0 Type B(1), VGA(1), HDMI 1.4(1), Display Port(1)

Audio:

| | |
|--------------------|---------|
| Internal Speakers: | 2W (x2) |
|--------------------|---------|

Power:

| | |
|------------------------|----------------------------------|
| Eco Mode (Conserve): | 14.6W |
| Eco Mode (optimized): | 17.4W |
| Consumption (typical): | 25W |
| Consumption (max): | 57W |
| Voltage: | AC 100-240V (universal), 50-60Hz |
| Stand-by: | 0.5W |
| Power Supply: | Internal |

Additional Hardware:

| | |
|-----------------------|---|
| Kensington Lock Slot: | 1 |
|-----------------------|---|

Controls:

| | |
|--------------------|--|
| Physical Controls: | 1,2,3,4,5, Power |
| On Screen Display: | Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality) |

Operating Conditions:

| | |
|----------------------------|-----------------------|
| Temperature: | 32-104° F (0 - 40° C) |
| Humidity (non-condensing): | 20-90% |

Mount:

| | |
|------------------|--------------|
| VESA Compatible: | 100 x 100 mm |
|------------------|--------------|

Video Signal:

| | |
|-----------------------|------------|
| Frequency Horizontal: | 24 ~ 82KHz |
| Frequency Vertical: | 50 ~ 75Hz |

Video Input:

| | |
|---------------|--|
| Digital Sync: | TMD5 for HDMI (v1.4), PCI-E for DisplayPort (v1.2) |
|---------------|--|

Weight (imperial):

| | |
|--------------|------|
| Net (lbs): | 15.2 |
| Gross (lbs): | 21.8 |

Weight (metric):

| | |
|-------------|-----|
| Net (kg): | 6.9 |
| Gross (kg): | 9.9 |

Dimensions (imperial) (WxHxD):

| | |
|-------------------------------|-------------------|
| Packaging (in.): | 26.0 x 16.4 x 9.8 |
| Physical Without Stand (in.): | 21.7 x 12.8 x 2.0 |

Dimensions (metric) (WxHxD):

| | |
|------------------------------|-----------------------|
| Packaging (mm): | 660.0 x 417.0 x 250.0 |
| Physical Without Stand (mm): | 549.4 x 325.6 x 50.0 |

General:

Regulations: cTUVus, FCC-B, ICES003, Energy Star, EPEAT, MX-CoC, Mexico Energy

PACKAGE CONTENTS: LCD Display x2, Power Cable x2, DP to DP Cable x1, HDMI Cable x1, USB3.0 Upstream Cable x2, Quick Start Guide x1

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

Warranty: Three-year limited warranty on parts, labor and backlight

UPC: 766907001853

Accessories:

CB-00008948, CB-00009950, CB-00010684, CB-00010958, LCD-CMK-001, LCD-WMK-001