Level Up Your Drive Performance.

Toshiba X300 Performance Internal Hard Drive



Image does not represent actual product.

Push your gaming and creative limits with the speed, reliability, and capacity of the Toshiba X300 Performance Internal Hard Drive. Optimized to handle high-end graphics and videos, the X300 is powered by a fast 7200 RPM drive with large cache size to minimize buffering time. Toshiba cache technology is designed to help eliminate lag for an ultra-responsive gaming experience. Plus, the X300 offers massive capacity to grow with your gaming and HD content. The X300 Performance Hard Drive works hard so you can play harder.


Toshiba X300 Performance Internal Hard Drive

Application

Powerful desktop workstations / All-in-one PCs Gaming computers / Home media computers



Product image may represent a design model.

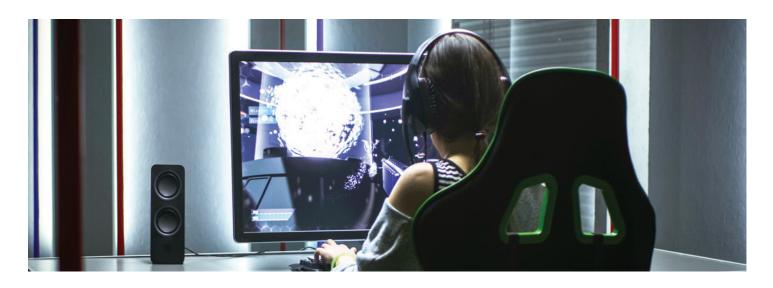



Powerful

Designed for gaming & high end desktop PCs



Responsive

Toshiba's cache technology delivers real-time drive performance



Massive Capacity

Store your growing gaming libraries & HD content



High Performance

7200 RPM with large cache size



Accurate

Drive stabilization technology* helps optimize read/write performance

* available on select models only



Reliable

Ramp loading technology & built-in shock sensors to help protect your content

Toshiba X300 Performance Internal Hard Drive

Capacity ¹	<u>16TB</u>	<u>14TB</u>	<u>12TB</u>	<u>10TB</u>	
Model Number (Retail Packaging)	HDWR31GXZSTA	HDWR31EXZSTA	HDWR21CXZSTA	HDWR11AXZSTA	
Model Number (Bulk)	HDWR31GUZSVA	HDWR31EUZSVA	HDWR21CUZSVA	HDWR11AUZSVA	
		Basic Spec	cifications		
Interface	SATA 6.0 Gbit/s	SATA 6.0 Gbit/s	SATA 6.0 Gbit/s	SATA 6.0 Gbit/s	
Form Factor ²	3.5-inch	3.5-inch	3.5-inch	3.5-inch	
Advanced Format (AF)	Yes	Yes	Yes	Yes	
RoHS Compatible ³	Yes	Yes	Yes	Yes	
	Features				
Shock Sensor	Yes	Yes	Yes	Yes	
Drive Stabilization Technology	Yes	Yes	Yes	Yes	
Toshiba Cache Technology	Yes	Yes	Yes	Yes	
Ramp Loading Technology	Yes	Yes	Yes	Yes	
Recording Technology	CMR	CMR	CMR	CMR	
	Performance				
Rotational Speed [RPM]	7,200	7,200	7,200	7,200	
Cache Size [MB]	512	512	256	256	
outile Size [mb]					
	Reliability				
MTTF [Hours] ⁴	600,000	600,000	600,000	600,000	
Unrecoverable Error Rate	1 per 10 ¹⁴	1 per 10 ¹⁴	1 per 10 ¹⁴	1 per 10 ¹⁴	
Load/Unload Cycles	300,000	300,000	300,000	300,000	
Limited Warranty [Years] ⁵	2	2	2	2	
		Power Ma	nagement		
Supply Voltage	5 V DC +10 % / -7 % 12 V DC ± 10 %	5 V DC +10 % / -7 % 12 V DC ± 10 %	5 V DC ± 5 % 12 V DC ± 10 %	5 V DC +10 / -5 % 12 V DC ± 10 %	
Power Consumption (Operating) [W]	6.91	6.91	6.77	9.48	
Power Consumption (Idle) [W]	4.03	4.03	4.54	7.22	
	Environmental				
Temperature (Operating) [°C]	5 to 60 (surface)	0 to 65 (surface)	5 to 60 (surface)	5 to 60 (surface)	
Temperature (Non-Operating) [°C]	-40 to 70	-40 to 70	-40 to 70	-40 to 70	
Vibration (Operating)	7.35 m/s² {0.75G} (5 to 300Hz) 2.45 m/s² {0.25G} (300 to 500Hz)	7.35 m/s 2 {0.75G} (5 to 300Hz) 2.45 m/s 2 {0.25G} (300 to 500Hz)	7.35 m/s 2 {0.75G} (5 to 300Hz) 2.45 m/s 2 {0.25G} (300 to 500Hz)	7.35 m/s² {0.75G} (5 to 300Hz) 2.45 m/s² {0.25G} (300 to 500Hz	
Vibration (Non-Operating)	29.4 m/s ² {3.0G} (5 to 500Hz)	29.4 m/s² {3.0G} (5 to 500Hz)	29.4 m/s² {3.0G} (5 to 500Hz)	29.4 m/s ² {3.0G} (5 to 500Hz)	
Shock (Operating)	686 m/s ² {70G} (2 ms duration)	686 m/s ² {70G} (2 ms duration)	686 m/s ² {70G} (2 ms duration)	686 m/s² {70G} (2 ms duration)	
Shock (Non-operating)	2,450 m/s² {250G} (2 ms duration)	2,450 m/s² {250G} (2 ms duration)	2,450 m/s² {250G} (2 ms duration)	2,450 m/s² {250G} (2 ms duration)	
Acoustics (Idle Model) [dB]	20	20	20	34	
		Phy	sical		
Height [mm Max.]	26.1	26.1	26.1	26.1	
Length [mm Max.]	147.0	147.0	147.0	147.0	
Width [mm Max.]	101.85	101.85	101.85	101.85	
Weight [g Max.]	720	720	720	770	
Bottom Holes Type ⁶	TYPE1	TYPE1	TYPE1	TYPE1	

Toshiba X300 Performance Internal Hard Drive

Capacity ¹	<u>8TB</u>	<u>6TB</u>	<u>4TB</u>
Model Number (Retail Packaging)	HDWR480XZSTA	HDWR460XZSTA	HDWR440XZSTA
Model Number (Bulk)	HDWR480UZSVA	HDWR460UZSVA	HDWR440UZSVA
		Basic Specifications	
Interface	SATA 6.0 Gbit/s	SATA 6.0 Gbit/s	SATA 6.0 Gbit/s
Form Factor ²	3.5-inch	3.5-inch	3.5-inch
Advanced Format (AF)	Yes	Yes	Yes
RoHS Compatible ³	Yes	Yes	Yes
		Features	
Shock Sensor	Yes	Yes	Yes
Drive Stabilization Technology	-	-	-
Toshiba Cache Technology	Yes	Yes	Yes
Ramp Loading Technology	Yes	Yes	Yes
Recording Technology	CMR	CMR	CMR
		Performance	
Rotational Speed [RPM]	7,200	7,200	7,200
Cache Size [MB]	256	256	256
cuelle 312e [MD]	250	Reliability	250
MTTF [Hours] ⁴	600,000	600,000	600,000
Unrecoverable Error Rate	1 per 10 ¹⁴	1 per 10 ¹⁴	1 per 10 ¹⁴
Load/Unload Cycles	300,000	300,000	300,000
Limited Warranty [Years] ⁵	2	2	2
		Power Management	
Supply Voltage	5 V DC ±5 % 12 V DC ±10 %	5 V DC ±5 % 12 V DC ±10 %	5 V DC ±5 % 12 V DC ±10 %
Power Consumption (Operating) [W]	8.41	7.72	6.81
Power Consumption (Idle) [W]	5.61	4.93	4.00
		Environmental	
Temperature (Operating) [°C]	5 to 60 (surface)	5 to 60 (surface)	5 to 60 (surface)
Temperature (Non-Operating) [°C]	-40 to 70	-40 to 70	-40 to 70
Vibration (Operating)	7.35 m/s² {0.75G} (2 to 300Hz) 4.90 m/s² {0.50G} (300 to 350Hz) 2.45 m/s² {0.25G} (350 to 500Hz)	7.35 m/s ² {0.75G} (2 to 300Hz) 4.90 m/s ² {0.50G} (300 to 350Hz) 2.45 m/s ² {0.25G} (350 to 500Hz)	7.35 m/s² {0.75G} (2 to 300Hz) 4.90 m/s² {0.50G} (300 to 350Hz) 2.45 m/s² {0.25G} (350 to 500Hz)
Vibration (Non-Operating)	29.4 m/s² {3.0G} (5 to 500Hz)	29.4 m/s² {3.0G} (5 to 500Hz)	29.4 m/s² {3.0G} (5 to 500Hz)
Shock (Operating)	784 m/s² {80G} (2 ms duration)	784 m/s ² {80G} (2 ms duration)	784 m/s² {80G} (2 ms duration)
Shock (Non-operating)	2,450 m/s² {250G} (2 ms duration)	2,450 m/s² {250G} (2 ms duration)	2,940 m/s² {300G} (2 ms duration)
Acoustics (Idle Model) [dB]	31	31	31
		Physical	
Height [mm Max.]	26.1	26.1	26.1
Length [mm Max.]	147.0	147.0	147.0
Width [mm Max.]	101.85	101.85	101.85
Weight [g Max.]	720	700	693
Bottom Holes Type ⁶	TYPE2	TYPE2	TYPE2

Toshiba Consumer Internal Hard Drives.

A drive for every storage application.



Image does not represent actual product.

To see our full line of consumer HDD storage products, visit: storage.toshiba.com/consumer-hdd

 $Product\ prices, specifications, configurations, colors, components, features, and\ availability\ are\ subject\ to\ change\ without\ notices.$ Compatibility may vary depending on user's hardware configuration and operating system.

© 2021 Toshiba America Electronic Components, Inc. All rights reserved. Trademarks are property of their respective owners.

¹ One Gigabyte (1GB) means $10^3 = 1,000,000,000$ bytes and One Terabyte (1TB) means $10^{12} = 1,000,000,000,000$ bytes using powers of 10. A computer operating system, however, reports storage capacity using powers of 2 for the definition of 1GB = 2^{30} = 1,073,741,824 bytes and 1TB = 2^{40} = 1,099,511,627,776 bytes, and therefore shows less storage capacity. Available storage capacity (including examples of various media files) will vary based on file size, formatting, settings, software and operating system and other factors.

² 2.5-inch and 3.5-inch mean the form factor of HDDs. They do not indicate drive's physical size.

³ Toshiba Storage & Electronic Devices Solutions Company defines "RoHS-Compatible" products as products that either (i) contain no more than a maximum concentration value of 0.1% by weight in Homogeneous Materials for lead, mercury, hexavalent chromium, polybrominated biphenyls (PBBs) and polybrominated diphenyl ethers (PBDEs) and of 0.01% by weight in Homogeneous Materials for cadmium; or (ii) fall within any of the $application\ exemptions\ set\ for th\ in\ the\ Annex\ to\ the\ RoHS\ Directive\ (Directive\ 2011/65/EC\ of\ the\ European\ Parliament\ and\ of\ the\ Council\ of\ 2011\ on\ the\ restriction\ of\ the\ use\ of\ certain\ hazardous\ substances\ in\ electrical\ and\ of\ the\ Council\ of\ 2011\ on\ the\ restriction\ of\ the\ use\ of\ certain\ hazardous\ substances\ in\ electrical\ and\ of\ the\ Council\ of\ 2011\ on\ the\ restriction\ of\ the\ use\ of\ certain\ hazardous\ substances\ in\ electrical\ and\ of\ the\ council\ of\ 2011\ on\ the\ restriction\ of\ the\ use\ of\ certain\ hazardous\ substances\ in\ electrical\ and\ of\ the\ council\ of\ 2011\ on\ the\ restriction\ of\ the\ use\ of\ certain\ hazardous\ substances\ in\ electrical\ and\ of\ the\ council\ of\ 2011\ on\ the\ restriction\ of\ the\ use\ of\ certain\ hazardous\ substances\ in\ electrical\ and\ of\ the\ council\ of\ 2011\ on\ the\ certain\ the\ certain$ electronic equipment). "Homogeneous Material" means a material of uniform composition that cannot be mechanically disjointed (meaning separated, in principle, by mechanical actions such as unscrewing, cutting, crushing, grinding and/or abrasive processes) into different materials. Examples of "Homogeneous Materials" would be individual types of plastics, ceramics, glass, metals, alloys, paper, board, resins and coatings. MTTF (Mean Time to Failure) is not a guarantee or estimate of product life; it is a statistical value related to mean failure rates for a large number of products which may not accurately reflect actual eration. Actual operating life of the product may be different from the MTTF.

⁵ Standard limited warranty applies. The warranty brochure can be viewed online at http://storage.toshiba.com/consumer-hdd/warranty-info.

⁶ Location of bottom mounting hole is different from product. For more information, please see the following page. https://toshiba.semicon-storage.com/us/design-support/faq/storage-holes.html