



Made for 27-gallon bins
With 20.25" x 30.25" lid size

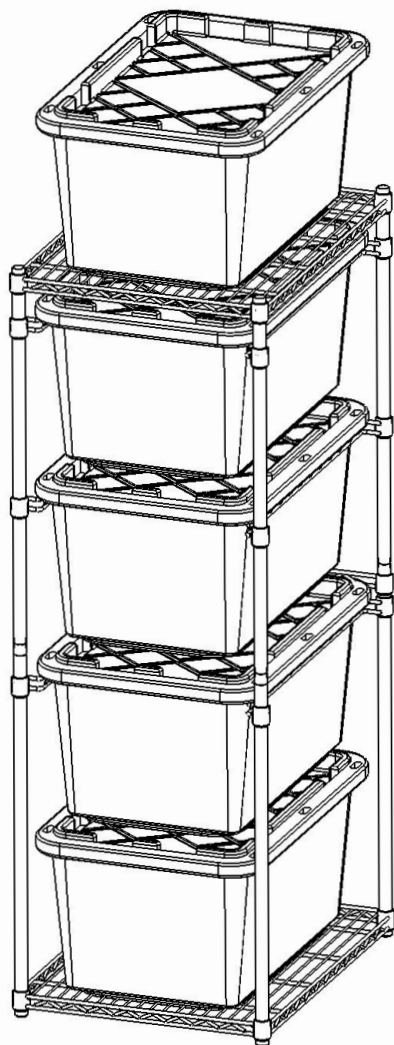


50lb capacity per bin


Components:

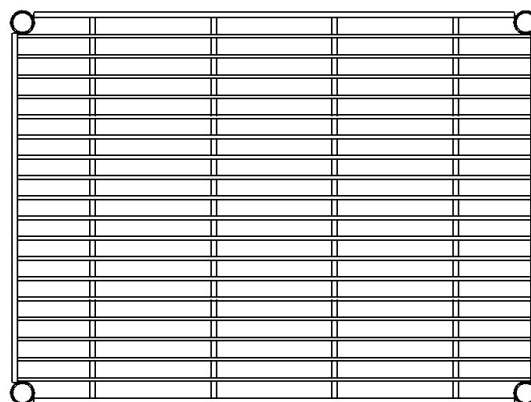


A Upper/Lower Shelf (x2)




B Sliding Rail (x6)




C Tie Support (x1)



D Upper Post (x4)




E Lower Post (x4)




F Threaded Foot (x4)



G Threaded Insert (x4)




H Sleeve Pair (x22)



I Top Cap (x4)

Anti-Tip Kit Components



Cable Tie Base (x2)



Cable Tie (x2)



Drywall Anchor & Screw (x2)

Need Assistance?

Call or email our dedicated customer support team for help

(877) 655-3443 | support@saferacks.com | www.saferacks.com

Prop 65 Warning:

This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to: www.P65Warnings.ca.gov.

⚠ WARNING



Children have died from furniture tipover. To reduce the risk of furniture tipover:

- ALWAYS install tipover restraint provided.
- NEVER put a TV on this product.
- NEVER allow children to stand, climb or hang on drawers, doors, or shelves.
- NEVER open more than one drawer at a time.
- Place heaviest items in the lowest drawers.

This is a permanent label. Do not remove!



1. ① Top Cap

④ Upper Post


⑤ Lower Post

⑥ Threaded Insert

⑦ Threaded Foot


Before you begin, insert your top caps and threaded inserts into your upper posts your threaded feet into your lower posts.

2.

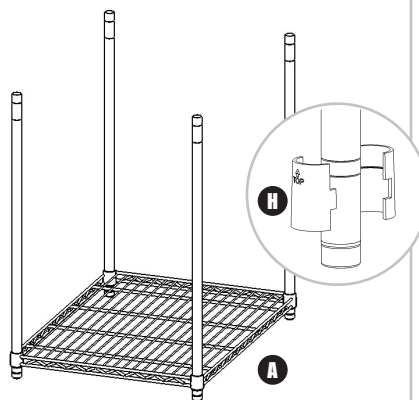


Connect sleeve pairs to the lowest notch on each post. Slide lower shelf over posts and secure to a snug fit (a rubber mallet can be used to tighten your shelf).

3.

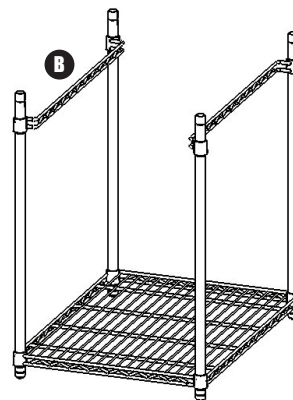


Connect sleeve pairs to the notches shown. Ensure sleeves are placed at the same height. Place sliding rails on each side and secure to a snug fit.

4.

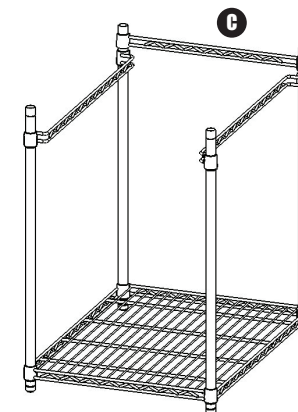


Connect sleeves pairs to the next set of notches. Slide the tie support over and secure to a snug fit (the notches at the top of the lower-front posts are not used).

5.

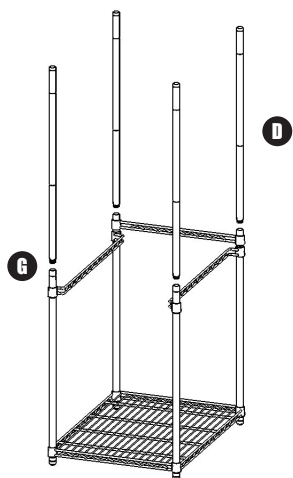


Attach your upper posts to your lower posts using the x4 threaded inserts provided. Twist tightly to ensure a snug and secure fit.

6.

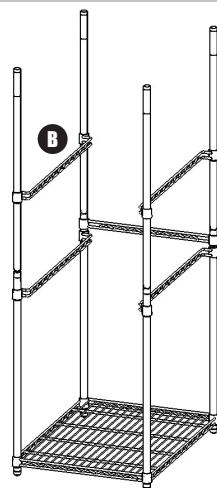

Connect sleeve pairs to the notches near the middle of the upper posts. Place sliding rails on each side and secure to a snug fit. Repeat for remaining sliding rails.

7.

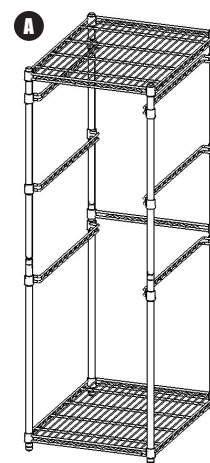


Connect sleeve pairs to the top of each post and ensure they are at the same height. Slide upper shelf over and secure to a snug fit (use a rubber mallet if necessary).

Optional: Anti-Tip Kit



Secure rack against the wall by driving the plastic drywall anchor until the anchor is flush against the wall. Secure the cable tie base to the wall by inserting a metal screw into the plastic anchor and tightening. Do not over tighten.



Repeat the steps above ensuring that the center-to-center distance is 21 11/16". Once both mounts are secure, use the provided cable ties to secure the rear vertical posts to the wall.