



## Quick Installation Guide Business Router

This document will guide you through the basic installation process for your new D-Link Business Router.

DBR-700



## About This Guide

This guide gives step by step instructions for setting up D-Link DBR-700 Business Router. Please note that the model you have purchased may appear slightly different from those shown in the illustrations.

## Unpacking the Product

Open the shipping carton and carefully unpack its contents. Please consult the packing list located in following information to make sure all items are present and undamaged. If any item is missing or damaged, please contact your local D-Link reseller for replacement.

- One (1) DBR-700 Business Router Appliance
- One (1) 12V/2A Power Adapter
- One (1) Ethernet (CAT5e) Cable
- One (1) Rack Bracket

## Product Overview

This chapter provides detailed descriptions of the DBR-700 device and its components.

### Front Panel

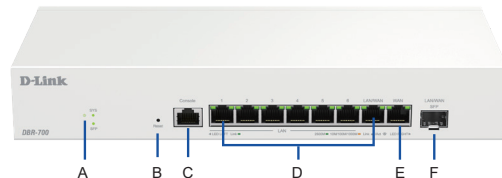


Figure 1. DBR-700 Front Panel

Item	Feature	Description
A	Power /System LED	Power /System LED: Indicates the DBR-700 is powered on
B	Reset	Reset the device
C	Console Port	Console Port
D	2.5G LAN Port (1 ~7)	Connect Ethernet Devices

E	2.5G WAN Port	Connect the Ethernet Cable to the cable or DSL Modem
F	2.5G SFP	Connect 2.5G SFP module

Table 1: DBR-700 Front Panel Descriptions

### Device Status LEDs and Ethernet Port LEDs




Figure 2. Ethernet RJ-45 Port LEDs

The device LEDs show information about current device status. When the device power up, the POWER/STATUS LED will show blinking green during power on process. Startup takes one minute approximately to complete, the LED will change to solid green. If you want to turn the device off and on again, we recommend you wait a few seconds between shutting it down and powering it back. The Ethernet LEDs show the status of each Ethernet port. Table 2 lists the name, color, status and description of each device LED.

LED Indicators	Color	Right LED Status	Description (Link, Speed and Activity)
Port 1~8 RJ45 Phone Jack	Green or Amber	Solid Green	A valid 2.5Gbps link is established.
		Blinking Green (NORMAL)	The port is transmitting or receiving packets at 2.5Gbps.
		Solid Amber	A valid 10Mbps, 100Mbps, or 1000Mbps link is established.
		Blinking Amber (NORMAL)	The port is transmitting or receiving packets at 10Mbps, 100Mbps or 1000Mbps.
		Off	No link is established.
Embedded LED Location	Color	Left LED Status	Description (Link Status)
Port 1~8 RJ45 Phone Jack	Green	Solid Green	When Ethernet Devices is connected and Link Up.
		Off	No link is established.

Table 2: Device Status LED Descriptions

### DBR-700 Default Interface Settings

Ethernet Interface	Interface Type	IP Address	Web-Based Management	DHCP Server
LAN(1-7)	Static IP	192.168.10.1	Enabled	Enabled
WAN	DHCP Client	0.0.0.0	Disabled	Disabled

Table 3: Default Interface Settings

**Note:** D-Link Business Routers only allow Web GUI access from LAN interfaces by default for security reason.

## Installing and Connecting the Device

This chapter describes how to connect cables and power to the device.

### Before You Begin

Observe the following precautions to help prevent shutdowns, equipment failures and injuries:

- Before installation, always check that the power supply is disconnected
- Ensure that the room in which you operate the device has adequate air circulation and that the room temperature does Not exceed 40°C (104°F)
- Allow 3 inch of clear space to the front and back of the device.
- Do not place the device in an equipment rack frame that blocks the air vents on the sides of the chassis. Ensure that enclosed racks have fans and louvered sides.
- Correct these hazardous conditions before any installation: moist or wet floors, leaks, ungrounded or frayed power cables, or missing safety grounds.

## Connecting Power and Turn the Device On/Off

The AC/DC Power Adapter shipped with the device connects the device to earth ground when plugged an AC grounding-type power outlet. The device must be connected to earth ground during normal operation.

To connect power to the device, plug the AC/DC power adapter into the DC power phone jet on the back panel of the device.

Note: We recommend using a surge protector for the power connection.

To power on the DBR-700 device, press the DC power switch on the rear panel to the on position. To power off the device, press the power switch to the off position.

## Connecting the Device to a Network

This section provides basic information about physically connecting the DBR-700 to a network. To connect the necessary cables as shown in Figure 3.

1. Connect an RJ-45 cable from the port labeled WAN to the external router. The port WAN is pre-allocated to the WAN network segment.
2. Connect an RJ-45 cable from the port labeled LAN (1-7) to a switch in the LAN network segment.




Figure 3. Basic Cabling Example

## Initially Configure the Device

The Business Router software is preinstalled on the DBR-700 device. When the device is powered on, it is ready to be configured. While the device has a default factory configuration that allow you to initially connect to the device, you must perform further configuration for your specific network requirements.

## Using the WebUI

To use the WebUI, the workstation from which you are managing the device must initially be on the same subnetwork as the device.

To access the device with the WebUI:

1. Connect your workstation on the port labeled LAN (1-7), which is pre-allocated to the LAN.
2. Ensure your workstation is DHCP Client enabled or configured with a static IP address in the 192.168.10.0/24 subnet.
3. Log on the Business Router Web Interface 192.168.10.1, the default log on information is:

Username: admin  
Password: Admin\$123





Figure 4. WebUI login

## Instruction and Cautionary Statement

The AC adapter plug of this product is detachable. If an abnormal force is applied to the AC adapter such as by cable tripping, it may generate a gap between AC plug and AC adapter, or the plug may be separated from the adapter. In addition, if the AC plug is broken and you keep using it, there may be a risk of a spark, ignition or smoke. If the AC plug is not attached properly or broken as stated above, stop using the product immediately.

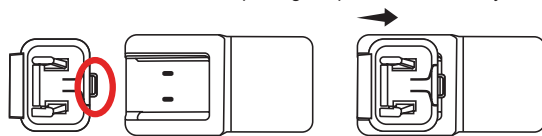

Align the pin assembly with the adapter body.

Slide the pin assembly into the adapter body until it snaps into place.

## Technical Support and Warranty Policy



<http://www.dlink.com/support>



<http://www.dlink.com/warranty>

## Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**FCC Caution:** Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.