

# Inspiron 3481

## Setup and Specifications



## Notes, cautions, and warnings

 | **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 | **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 | **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.


© 2018 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

- 1 Set up your Inspiron 14 3481..... 4**
- 2 Create a USB recovery drive for Windows..... 6**
- 3 Views of Inspiron 14 3481..... 7**
  - Right.....7
  - Left.....7
  - Base..... 8
  - Display.....9
  - Bottom..... 10
- 4 Specifications of Inspiron 14 3481..... 11**
  - Dimensions and weight.....11
  - Processors.....11
  - Chipset..... 12
  - Operating system.....12
  - Memory.....12
  - Ports and connectors.....13
  - Communications..... 13
    - Ethernet..... 13
    - Wireless module..... 13
  - Audio.....14
  - Storage.....15
  - Intel Optane memory (optional).....15
  - Media-card reader.....15
  - Keyboard.....16
  - Camera.....16
  - Touchpad.....17
    - Touchpad gestures.....17
  - Power adapter.....17
  - Battery.....18
  - Display.....18
  - Video.....19
  - Fingerprint reader (optional).....20
  - Computer environment.....20
- 5 Keyboard shortcuts..... 21**
- 6 Getting help and contacting Dell.....23**
  - Self-help resources.....23
  - Contacting Dell.....23

# Set up your Inspiron 14 3481

**NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

- 1 Connect the power adapter and press the power button.

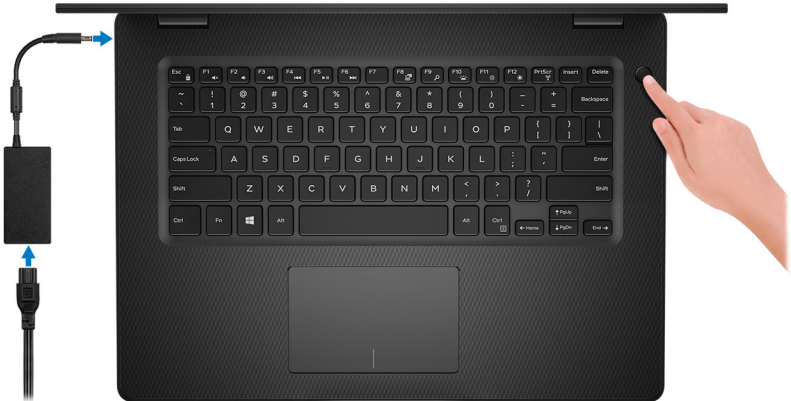

**NOTE:** To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

- 2 Finish operating system setup.

**For Ubuntu:**

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, see the knowledge base articles [SLN151664](#) and [SLN151748](#) at [www.dell.com/support](http://www.dell.com/support).


**For Windows:**

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
- **NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

- 3 Locate and use Dell apps from the Windows Start menu—Recommended

**Table 1. Locate Dell apps**

Resources	Description
	My Dell

Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.

### SupportAssist



Pro-actively checks the health of your computer’s hardware and software. The SupportAssist OS Recovery tool troubleshoots issues with the operating system. For more information, see the SupportAssist documentation at [www.dell.com/support](http://www.dell.com/support).

**ⓘ | NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.**



### Dell Update

Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article [SLN305843](http://www.dell.com/support) at [www.dell.com/support](http://www.dell.com/support).



### Dell Digital Delivery

Download software applications, which are purchased but not pre-installed on your computer. For more information about using Dell Digital Delivery, see the knowledge base article [153764](http://www.dell.com/support) at [www.dell.com/support](http://www.dell.com/support).

4 Create recovery drive for Windows.

**ⓘ | NOTE: It is recommended to create a recovery drive to troubleshoot and fix problems that may occur with Windows.**

For more information, see [Create a USB recovery drive for Windows](#).

## Create a USB recovery drive for Windows

Create a recovery drive to troubleshoot and fix problems that may occur with Windows. An empty USB flash drive with a minimum capacity of 16 GB is required to create the recovery drive.

 **NOTE:** This process may take up to an hour to complete.

 **NOTE:** The following steps may vary depending on the version of Windows installed. Refer to the [Microsoft support site](#) for latest instructions.

- 1 Connect the USB flash drive to your computer.
- 2 In Windows search, type *Recovery*.
- 3 In the search results, click **Create a recovery drive**.  
The **User Account Control** window is displayed.
- 4 Click **Yes** to continue.  
The **Recovery Drive** window is displayed.
- 5 Select **Back up system files to the recovery drive** and click **Next**.
- 6 Select the **USB flash drive** and click **Next**.  
A message appears, indicating that all data in the USB flash drive will be deleted.
- 7 Click **Create**.
- 8 Click **Finish**.

For more information about reinstalling Windows using the USB recovery drive, see the *Troubleshooting* section of your product's *Service Manual* at [www.dell.com/support/manuals](http://www.dell.com/support/manuals).

# Views of Inspiron 14 3481

## Right



**1 SD-card slot**

Reads from and writes to the SD card.


**2 USB 2.0 port**

Connect peripherals such as external storage devices and printers. Provides data transfer speeds up to 480 Mbps.

**3 Security-cable slot (wedge-shaped)**

Connect a security cable to prevent unauthorized movement of your computer.

## Left

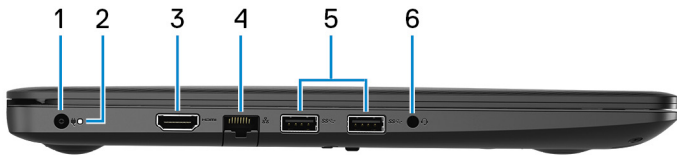

**1 Power-adaptor port**

Connect a power adapter to provide power to your computer.

**2 Power and battery-status light/hard-drive activity light**

Indicates the battery-charge status or the hard-drive activity.

**NOTE:** Press **Fn+H** to toggle between the power and battery-status light, and hard-drive activity light.

**Hard-drive activity light**

Turns on when the computer reads from or writes to the hard drive.

**Power and battery-status light**

Indicates the power and battery-charge status.

**Solid white** — Power adapter is connected and the battery has more than 5% charge.

**Amber** — Computer is running on battery and the battery has less than 5% charge.

### Off

- Power adapter is connected and the battery is fully charged.
- Computer is running on battery and the battery has more than 5% charge.
- Computer is in sleep state, hibernation, or turned off.

### 3 HDMI port

Connect to a TV or another HDMI-in enabled device. Provides video and audio output.

### 4 Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.


### 5 USB 3.1 Gen 1 ports (2)

Connect peripherals such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

### 6 Headset port

Connect headphones or a headset (headphone and microphone combo).

## Base

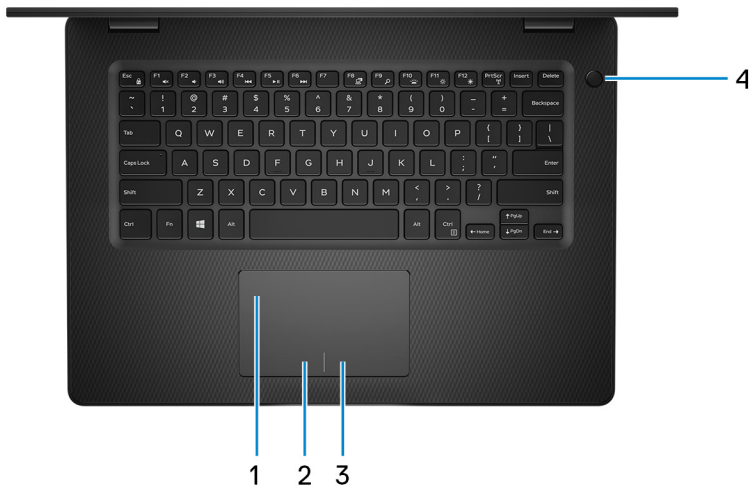

### 1 Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two finger tap to right-click.

### 2 Left-click area

Press to left-click.

### 3 Right-click area

Press to right-click.

### 4 Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.


When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 4 seconds to force shut-down the computer.



If the power button has a fingerprint reader, place your finger on the power button to log in.

① **NOTE:** You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at [www.dell.com/support/manuals](http://www.dell.com/support/manuals).

## Display

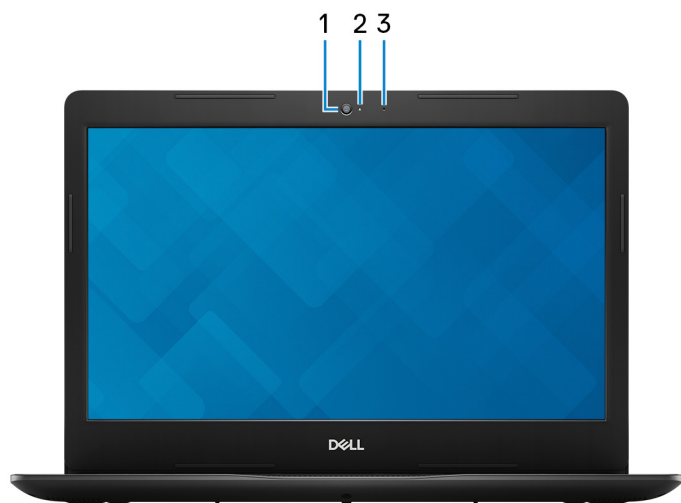

1 **Camera**

Enables you to video chat, capture photos, and record videos.


2 **Camera-status light**

Turns on when the camera is in use.

3 **Microphone**

Provides digital sound input for audio recording, voice calls, and so on.

# Bottom

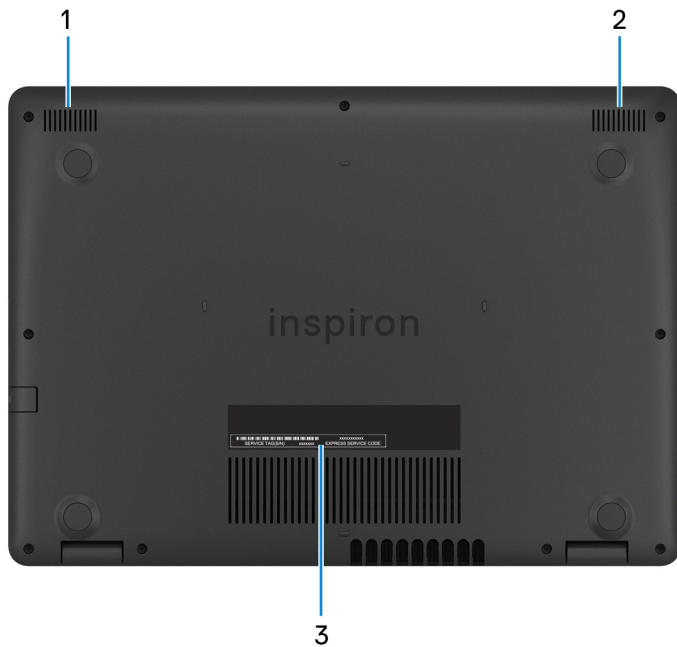

1 **Left speaker**

Provides audio output.

2 **Right speaker**

Provides audio output.

3 **Service Tag label**

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

# Specifications of Inspiron 14 3481

## Dimensions and weight

**Table 2. Dimensions and weight**

Description	Values
Height:	
Front	19.90 mm (0.78 in.)
Rear	21 mm (0.83 in.)
Width	339 mm (13.35 in.)
Depth	241.90 mm (9.52 in.)
Weight	1.79 kg (3.95 lb)

**NOTE:** The weight of your computer depends on the configuration ordered and the manufacturing variability.

## Processors

**Table 3. Processors**

Description	Values
Processors	8 <sup>th</sup> Generation Intel Core i3/i5/i7    7 <sup>th</sup> Generation Intel Core i3/i5/i7 <ul style="list-style-type: none"><li>• Intel Pentium Processor 4000 Series</li><li>• Intel Celeron Processor 3000 Series</li></ul>
Wattage	15 W    15 W    15 W
Core count	2/4    2/4    2
Thread count	4/8    4/8    4
Speed	Up to 4.6 GHz Boost    Up to 4.6 GHz Boost    Up to 2.2 GHz
Smart cache	4 MB/6 MB/8 MB    4 MB/6 MB/8 MB    2 MB/4 MB
Integrated graphics	Intel UHD Graphics 620    Intel HD Graphics 620    Intel HD Graphics 610

# Chipset

Table 4. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	<ul style="list-style-type: none"><li>8<sup>th</sup> Generation Intel Core i3/i5/i7</li><li>7<sup>th</sup> Generation Intel Core i3/i5/i7</li><li>Intel Pentium Processor 4000 Series</li><li>Intel Celeron Processor 3000 Series</li></ul>
DRAM bus width	x64
Flash EPROM	16 MB
PCIe bus	Up to PCIe Gen3
External bus frequency	Not supported

## Operating system

- Ubuntu
- Windows 10 Home (64-bit)
- Windows 10 Professional (64-bit)

## Memory

Table 5. Memory specifications

Description	Values
Slots	Up to two SoDIMM slots <b>i</b> <b>NOTE: Number of memory slots available may differ according to region.</b>
Type	DDR4
Speed	2133 MHz
Maximum memory	16 GB
Minimum memory	4 GB
Memory size per slot	4 GB, 8 GB, and 16 GB
Configurations supported	<ul style="list-style-type: none"><li>4 GB DDR4 at 2133 MHz</li><li>8 GB DDR4 at 2133 MHz</li><li>12 GB DDR4 at 2133 MHz</li><li>16 GB DDR4 at 2133 MHz</li></ul>

# Ports and connectors

Table 6. Ports and connectors

**External:**

Network	One RJ-45 port
USB	<ul style="list-style-type: none"><li>• One USB 2.0 port</li><li>• Two USB 3.1 Gen 1 ports</li></ul>
Audio	One headset port
Video	One HDMI 1.4b port
Media card reader	One SD card slot
Docking port	Not supported
Power adapter port	One power adapter port
Security	One security-cable slot (wedge-shaped)

**Internal:**

M.2	<ul style="list-style-type: none"><li>• One M.2 slot for Wi-Fi and Bluetooth combo card</li><li>• One PCIe M.2 2242/2260/2280 slot for solid-state drive or Intel Optane</li></ul>
-----	--

**NOTE:** To learn more about the features of different types of M.2 cards, see the knowledge base article [SLN301626](#).

## Communications

### Ethernet

Table 7. Ethernet specifications

Description	Values
Model number	Realtek RTL8106 Ethernet controller (integrated on system board)
Transfer rate	10/100 Mbps

### Wireless module

Table 8. Wireless module specifications

Description	Values
Model number	Qualcomm QCA9565 (DW 1707) <ul style="list-style-type: none"><li>• Qualcomm QCA9377 (DW 1810)</li></ul>

Description		Values
		<ul style="list-style-type: none"> <li>Qualcomm QCA61x4A (DW1820)</li> </ul>
Transfer rate	Up to 433 Mbps	<ul style="list-style-type: none"> <li>Up to 433 Mbps</li> <li>Up to 867 Mbps</li> </ul>
Frequency bands supported	2.4 GHz	Dual band 2.4 GHz/5 GHz
Wireless standards	Wi-Fi 802.11b/g/n	Wi-Fi 802.11a/b/g/n/ac
Encryption	<ul style="list-style-type: none"> <li>64-bit/128-bit WEP</li> <li>AES-CCMP</li> <li>TKIP</li> </ul>	<ul style="list-style-type: none"> <li>64-bit/128-bit WEP</li> <li>AES-CCMP</li> <li>TKIP</li> </ul>
Bluetooth	Bluetooth 4.0	Bluetooth 4.1

## Audio

**Table 9. Audio specifications**

Description	Values	
Controller	Realtek ALC3246	
Stereo conversion	Supported	
Internal interface	Intel High-definition audio	
External interface	One headset port	
Speakers	Two	
Internal speaker amplifier	Supported (audio codec integrated)	
External volume controls	Media-control shortcut keys	
Speaker output:		
	Average	2 W
	Peak	2.5 W
Subwoofer output	Not supported	
Microphone	Single digital microphone in the camera assembly	

# Storage

**Table 10. Storage specifications**

Storage type	Interface type	Capacity
One 7 mm 2.5-inch hard drive	SATA AHCI 6 Gbps	Up to 500 GB
One M.2 2242/2260/2280 solid-state drive	PCIe NVMe up to 32 Gbps	Up to 256 GB

## Intel Optane memory (optional)

Intel Optane memory functions only as a storage accelerator. It neither replaces nor adds to the memory (RAM) installed on your computer.

**NOTE:** Intel Optane memory is supported on computers that meet the following requirements:

- 7<sup>th</sup> Generation or higher Intel Core i3/i5/i7 processor
- Windows 10 64-bit version or higher (Anniversary Update)
- Latest version of Intel Rapid Storage Technology driver

**Table 11. Intel Optane memory**

Description	Values
Type	Storage accelerator
Interface	PCIe 3.0 x2
Connector	M.2 2280
Configurations supported	16 GB
Capacity	16 GB

## Media-card reader

**Table 12. Media-card reader specifications**

Description	Values
Type	One SD card slot
Cards supported	<ul style="list-style-type: none"><li>• Secure Digital (SD)</li><li>• Secure Digital High Capacity (SDHC)</li><li>• SD Extended Capacity (SDXC)</li></ul>

# Keyboard

Table 13. Keyboard specifications

Description	Values
Type	<ul style="list-style-type: none"><li>• Backlit keyboard</li><li>• Non-backlit keyboard</li></ul>
Layout	QWERTY
Number of keys	<ul style="list-style-type: none"><li>• United States and Canada: 80 keys</li><li>• United Kingdom: 81 keys</li><li>• Japan: 84 keys</li></ul>
Size	X = 19.05 mm key pitch Y = 18.05 mm key pitch
Shortcut keys	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) by changing Function Key Behavior in BIOS setup program.</p> <p><a href="#">Keyboard shortcuts</a></p>

# Camera

Table 14. Camera specifications

Description	Values
Number of cameras	One
Type	One HD fixed focus
Location	Front camera
Sensor type	CMOS sensor technology
Resolution:	
Still image	0.92 megapixel (HD)
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle	78.6 degrees



# Touchpad

**Table 15. Touchpad specifications**

Description	Values
Resolution:	
Horizontal	3215
Vertical	1956
Dimensions:	
Horizontal	105 mm (4.13 in.)
Vertical	65 mm (2.56 in.)

## Touchpad gestures

For more information about touchpad gestures for Windows 10, see the Microsoft knowledge base article [4027871](https://support.microsoft.com/4027871) at [support.microsoft.com](https://support.microsoft.com).

## Power adapter

**Table 16. Power adapter specifications**

Description	Values
Type	45 W 65 W
Diameter (connector)	4.5 mm 4.5 mm
Input voltage	100 VAC-240 VAC 100 VAC-240 VAC
Input frequency	50 Hz-60 Hz 50 Hz-60 Hz
Input current (maximum)	1.30 A 1.60 A/ 1.70 A
Output current (continuous)	2.31 A 3.34 A
Rated output voltage	19.50 VDC 19.50 VDC
Temperature range:	
Operating	0°C to 40°C (32°F to 104°F) 0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F) -40°C to 70°C (-40°F to 158°F)

# Battery

**Table 17. Battery specifications**

Description	Values
Type	3-cell "smart" lithium-ion (42 WHr)
Voltage	11.40 VDC
Weight (maximum)	0.2 kg (0.44 lb)
Dimensions:	
Height	5.90 mm (0.23 in.)
Width	175.37 mm (6.90 in.)
Depth	90.73 mm (3.57 in.)
Temperature range:	
Operating	0°C to 35°C (32°F to 95°F)
Storage	-40°C to 65°C (-40°F to 149°F)
Operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Charging time (approximate)	4 hours (when the computer is off)
	<p><b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on <a href="https://www.dell.com/">https://www.dell.com/</a></p>
Life span (approximate)	300 discharge/charge cycles
Coin-cell battery	CR-2032
Operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.

# Display

**Table 18. Display specifications**

Description	Values
Type	14-inch HD panel                      14-inch FHD panel
Panel technology	Twisted Nematic (TN)                      In-Plane Switching (IPS)
Luminance (typical)	220 nits                                      220 nits
Dimensions (Active area):	
Height	173.95 mm (6.85 in.)                      173.95 mm (6.85 in.)

Description	Values	
Width	309.40 mm (12.18 in.)	309.40 mm (12.18 in.)
Diagonal	355.60 mm (14 in.)	355.60 mm (14 in.)
Native resolution	1366 x 768	1920 x 1080
Megapixels	1.05	2.07
Pixels per inch (PPI)	111.94	157.35
Contrast ratio (min)	300:1	600:1
Response time (max)	25 msec rise/fall	35 msec rise/fall
Refresh rate	60 Hz	60 Hz
Horizontal view angle	+/- 40 degrees	+/- 80 degrees
Vertical view angle	+ 10/- 30 degrees	+/- 80 degrees
Pixel pitch	0.2265 mm	0.1614 mm
Power consumption (maximum)	3.0 W	3.7 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare
Touch options	No	No

## Video

**Table 19. Video specifications**

### Discrete graphics

Controller	External display support	Memory size	Memory Type
AMD Radeon 520	Not supported	2 GB	DDR5
AMD Radeon 535	Not supported	4 GB	DDR5

**Table 20. Video specifications**

### Integrated graphics

Controller	External display support	Memory size	Processor
<ul style="list-style-type: none"> <li>• Intel HD Graphics 620</li> <li>• Intel UHD Graphics 620</li> <li>• Intel HD Graphics 610</li> </ul>	One HDMI 1.4b port	Shared system memory	<ul style="list-style-type: none"> <li>• 8<sup>th</sup> Generation Intel Core i3/i5/i7</li> <li>• 7<sup>th</sup> Generation Intel Core i3/i5/i7</li> <li>• Intel Pentium Processor 4000 Series</li> <li>• Intel Celeron Processor 3000 Series</li> </ul>

# Fingerprint reader (optional)

**Table 21. Fingerprint reader specifications**

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi
Sensor area	5.50 mm x 4.40 mm
Sensor pixel size	108 x 88 pixels

## Computer environment

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 22. Computer environment**

	Operating	Storage
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G‡
Altitude (maximum)	0 m to 3,048 m (0 ft to 10,000 ft)	0 m to 10,668 m (0 ft to 35,000 ft)

\* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

‡ Measured using a 2 ms half-sine pulse when the hard-drive head is in parked position.

# Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.


































Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, 2 is typed out; if you press **Shift** + **2**, @ is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **Fn** + **Esc**. Subsequently, multi-media control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn** + **F1**.













**NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing Function Key Behavior in BIOS setup program.

**Table 23. List of keyboard shortcuts**

Function key	Re-defined key (for multi-media control)	Behavior
	 + 	Mute audio
	 + 	Decrease volume
	 + 	Increase volume
	 + 	Play previous track/chapter
	 + 	Play/Pause
	 + 	Play next track/chapter
	 + 	Switch to external display
	 + 	Search
	 + 	Toggle keyboard backlight (optional)
	 + 	Decrease brightness
	 + 	Increase brightness

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

**Table 24. List of keyboard shortcuts**



<b>Function key</b>	<b>Behavior</b>
	Turn off/on wireless
	Pause/Break
	Sleep
	Toggle scroll lock
	Toggle between power and battery-status light/hard-drive activity light
	System request
	Open application menu
	Toggle Fn-key lock
	Page up
	Page down
	Home
	End

# Getting help and contacting Dell

## Self-help resources

You can get information and help on Dell products and services using these self-help resources:

**Table 25. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="http://www.dell.com">www.dell.com</a>
My Dell	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	<a href="http://www.dell.com/support/windows">www.dell.com/support/windows</a> <a href="http://www.dell.com/support/linux">www.dell.com/support/linux</a>
Troubleshooting information, user manuals, setup instructions, product specifications, technical help blogs, drivers, software updates, and so on.	<a href="http://www.dell.com/support">www.dell.com/support</a>
Dell knowledge base articles for a variety of computer concerns.	<ol style="list-style-type: none"> <li>1 Go to <a href="http://www.dell.com/support">www.dell.com/support</a>.</li> <li>2 Type the subject or keyword in the <b>Search</b> box.</li> <li>3 Click <b>Search</b> to retrieve the related articles.</li> </ol>
Learn and know the following information about your product:	See <i>Me and My Dell</i> at <a href="http://www.dell.com/support/manuals">www.dell.com/support/manuals</a> .
<ul style="list-style-type: none"> <li>• Product specifications</li> <li>• Operating system</li> <li>• Setting up and using your product</li> <li>• Data backup</li> <li>• Troubleshooting and diagnostics</li> <li>• Factory and system restore</li> <li>• BIOS information</li> </ul>	<p>To locate the <i>Me and My Dell</i> relevant to your product, identify your product through one of the following:</p> <ul style="list-style-type: none"> <li>• Select <b>Detect Product</b>.</li> <li>• Locate your product through the drop-down menu under <b>View Products</b>.</li> <li>• Enter the <b>Service Tag number</b> or <b>Product ID</b> in the search bar.</li> </ul>

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [www.dell.com/contactdell](http://www.dell.com/contactdell).

**NOTE:** Availability varies by country and product, and some services may not be available in your country.

**NOTE:** If you do not have an active internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.