


Quick Installation Guide


300Mbps Wireless N Router

MODEL NO. TL-WR841N/TL-WR841ND

Package Contents

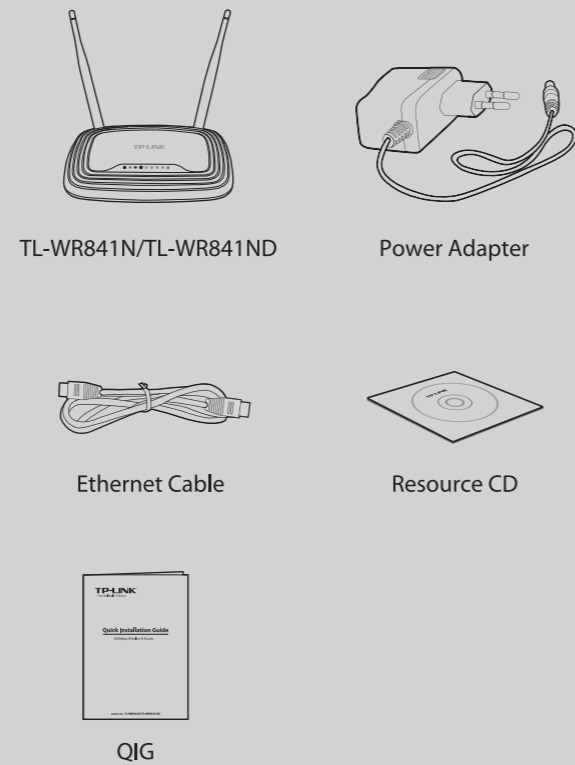

1 Hardware Connection

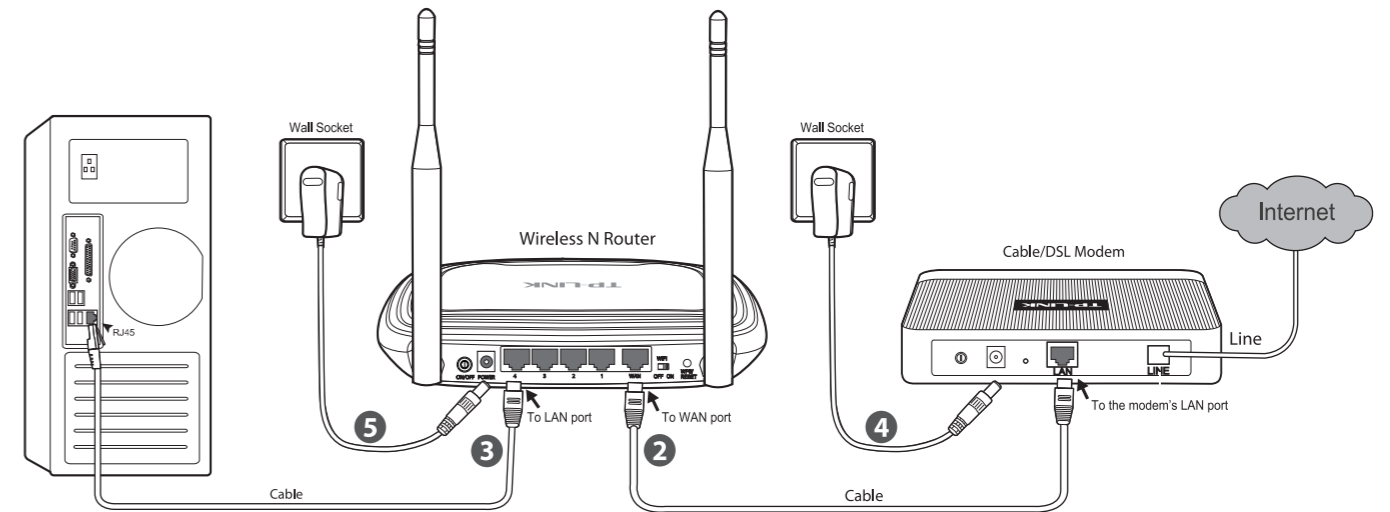


- ❶ Power off your modem.
- ❷ Connect the **WAN** port on your Router to the modem's **LAN** port with an Ethernet cable.
- ❸ Connect your computer to one of the LAN ports labeled **1~4** on the Router with an Ethernet cable.
- ❹ Power on the modem and wait for one minute.
- ❺ Plug the provided Power Adapter into the **POWER** jack on the back of the Router and the other end to a standard electrical wall socket. Press the **ON/OFF** button to power on the Router.

Please confirm that the **WIFI** switch is **ON** so that client devices can connect to the Router wirelessly.

2 Configuration for Windows with Setup Wizard

If you are using a MAC/Linux or a windows computer without a CD drive to run the mini CD, please refer to **Appendix 1** for configuration.


- ❶ Insert the TP-LINK Resource CD into the CD-ROM drive.

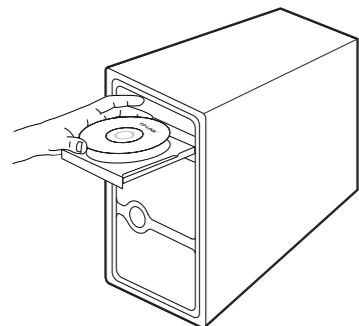


- ❷ Here we take TL-WR841ND for example. Select **TL-WR841ND** and click **Easy Setup Assistant**.




- ❸ After confirming the hardware connection and the status of LEDs, please click **NEXT** to continue.

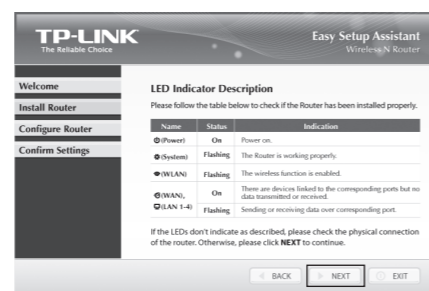


- ❹ After the connectivity is checked successfully, please click **NEXT**.

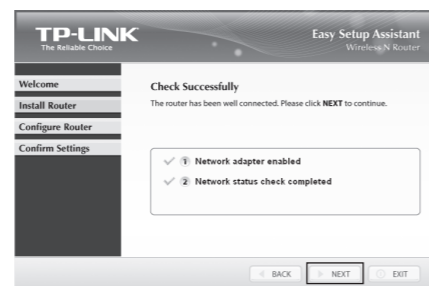


- ❺ Select the connection type your ISP provides and click **NEXT**. Here we take **Dynamic IP** for example.

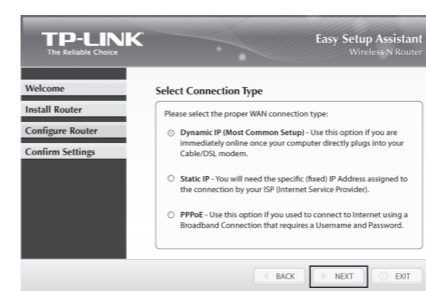


- ❻ If you are utilizing a cable modem to access the Internet, you may need to clone your MAC address.

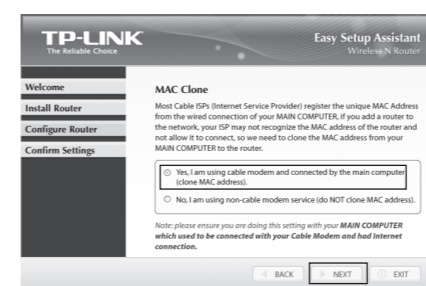

- ❼ You can rename your wireless network on this page. The default wireless name is TP-LINK_XXXXXX. Click **NEXT** to continue.

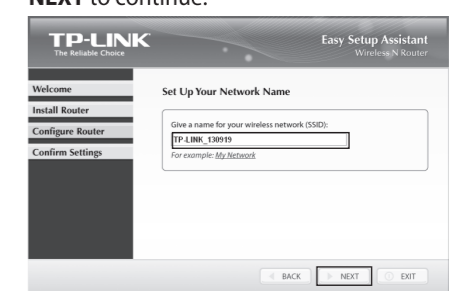

- ❽ You are recommended to select **Most Security (WPA2-PSK)** to secure your wireless network.

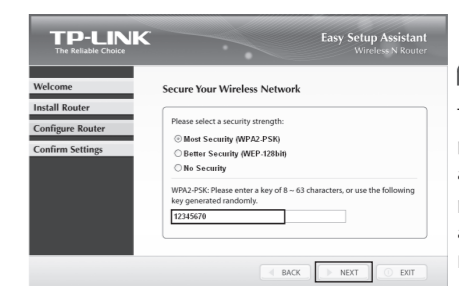

The Router is pre-encrypted. The default wireless password, the same as the PIN code, is printed on the label at the bottom of the Router.

(To be continued)


2 Configuration for Windows with Setup Wizard

- 9 After confirming the configurations, click **NEXT** to continue.



You can save these settings in a text file on your desktop. If you forget the Network Security Key, you can check the **Router Settings.txt**.


- 10 After the configuration is completed successfully, please click **NEXT**.

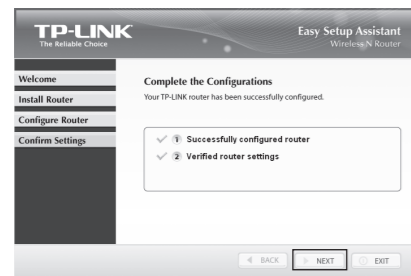

- 11 If your client devices support WPS (Wi-Fi Protected Setup), you can add your device to the network by pushing the WPS button. Then click **NEXT**.




- 12 Click **FINISH** to complete the setup.

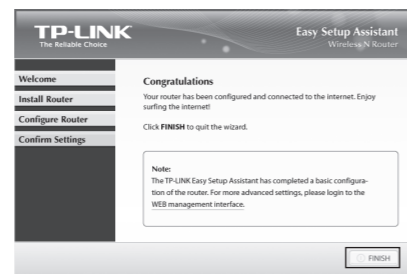


You can click **WEB management interface** for more advanced settings.

Appendix 1: Configuring the Router via Web Management Page (for Mac OS X/Linux users or Windows users who can't run the mini CD)


- 1 Open your browser and type <http://tplinklogin.net> in the address field, then use the user name **admin** and password **admin** to log in.

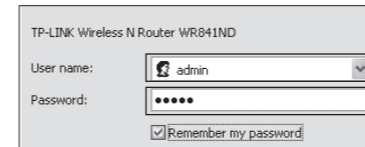


- 2 Click **Quick Setup** in the main menu and click **Next**.

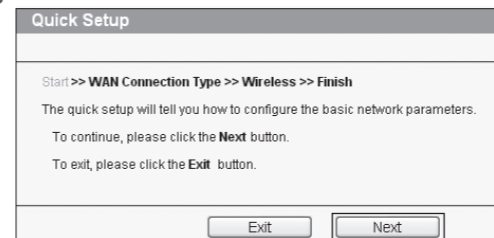


- 3 Select the WAN connection type provided by your ISP. Or you can select **Auto-Detect** and click **Next** to continue.

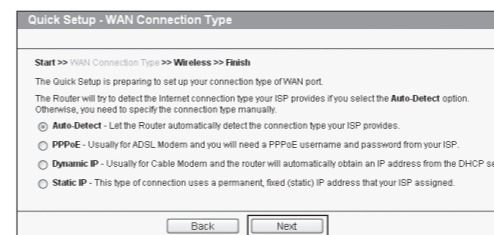

- 4 The **Dynamic IP** is the suitable connection type for most cases. Here we take it as an example. On the next page, the cable modem users may need to clone the MAC address from their main computer - the computer which is used to connect with the cable modem. Then click **Next**.

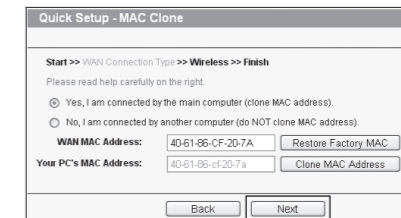

- 5 You can rename your wireless network and create your own password on this page. The default wireless name is TP-LINK_XXXXXX, and the default wireless password, the same as the PIN code, is printed on the bottom label. Click **Next** to continue.

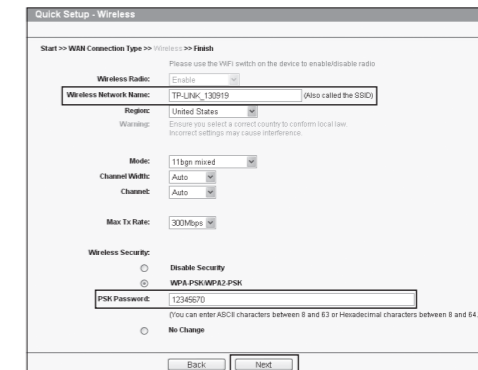


- 6 Click **Finish** to make your settings take effect.

Appendix 2: Troubleshooting

1. What can I do if I cannot access the Internet?

- Check to verify all connections are connected properly. Try with different Ethernet cables to ensure they are working properly.
- Check to see if you are able to access the Router's web management page. If not, please refer to "What can I do if I cannot open the web management window?".
- Please log in the web management page (<http://tplinklogin.net>), click the menu "Network > WAN", and ensure that the WAN Connection Type is Dynamic IP; this is the suitable connection type for most DSL/Cable modems and other networks.
- For cable modem users, please click menu "Network > MAC Clone". Click **Clone MAC Address** button and then click **Save**. Reboot the modem first and then the Router, try to access the Internet from your computer. If the problem persists, please go to the next step.

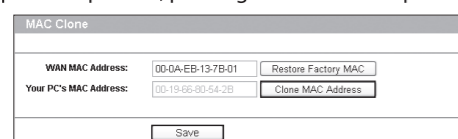

- 5) Connect your computer directly to your modem and attempt to access the Internet. If you are still unable to access the Internet, please contact your internet provider for further assistance.

2. What can I do if I cannot open the web management window?


- For Windows 7/Vista**
Go to 'Start > Settings > Control Panel'. Click 'View network status and tasks > View status > Properties' and double-click 'Internet Protocol Version 4 (TCP/IPv4)'. Select 'Obtain an IP address automatically', choose 'Obtain DNS server address automatically' and click 'OK'.
- For Windows XP/2000**
Go to 'Start > Control Panel'. Click 'Network and Internet Connections > Network Connections'. Right-click 'Local Area Connection', select 'Properties' and then double-click 'Internet Protocol (TCP/IP)'. Select 'Obtain an IP address automatically', choose 'Obtain DNS server address automatically' and click 'OK'.

3. What can I do if I forget my password?

- For default wireless password: Please refer to the "Wireless Password/PIN" labeled on the bottom of the Router.
- For the web management page password: Reset the Router first and then use the default user name and password: admin, admin.

4. How do I restore my Router's configuration to its factory default settings?

If your router does not work properly, you can reset it and then configure it again. With the Router powered on, press and hold the **WPS/RESET** button on the rear panel for approximately 8 seconds before releasing it.

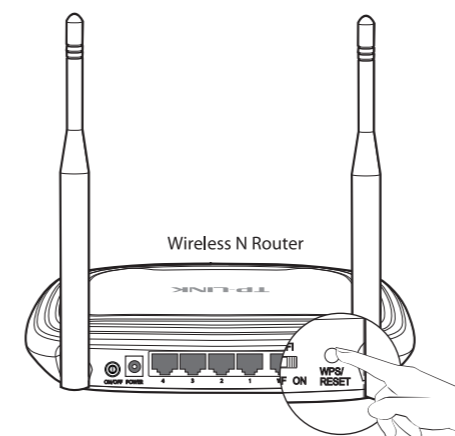

Technical Support

- For more troubleshooting help, go to www.tp-link.com/support/faq.asp
- To download the latest Firmware, Driver, Utility and User Guide, go to www.tp-link.com/support/download.asp
- For all other technical support, please contact us by using the following details:

Global
Tel: +86 755 26504400
E-mail: support@tp-link.com
Service time: 24hrs, 7days a week

Singapore
Tel: +65 62840493
E-mail: support.sg@tp-link.com
Service time: 24hrs, 7days a week

UK
Tel: +44 (0) 845 147 0017
E-mail: support.uk@tp-link.com
Service time: 24hrs, 7days a week

USA/Canada
Toll Free: +1 866 225 8139
E-mail: support.usa@tp-link.com
Service time: 24hrs, 7days a week

Malaysia
Toll Free: 0800 875465 (1300 88TPLINK)
E-mail: support.my@tp-link.com
Service time: 24 hrs a day, 7days a week

Turkey
Tel: +48 (0) 801 080 618 / +48 22 7217563 (if calls from mobile phone)
E-mail: support.pl@tp-link.com
Service time: Monday to Friday 9:00 AM to 5:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

Germany / Austria
Tel: +49 1805 875465 (German Service)
E-mail: support.de@tp-link.com
Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42 EUR/min from mobile phone
Service Time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time in Germany)
* Except bank holidays in Hesse

Poland
Tel: +48 (0) 801 080 618 / +48 22 7217563 (if calls from mobile phone)
E-mail: support.ch@tp-link.com
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

Indonesia
Tel: +62 (0) 21 6259 135
E-mail: support.id@tp-link.com
Service time: Monday to Friday 9:00-12:00, 13:00-18:00
*Except public holidays

Switzerland
Tel: +41 (0) 848 800998 (German Service)
E-mail: support.ru@tp-link.com
Fee: 4-8 Rp/min, depending on rate of different time
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

Russian Federation
Tel: +7 (499) 754-55-60
E-mail: support.ru@tp-link.com
Service time: from 10:00 to 18:00 (Moscow time)
*Except weekends and holidays in Russian Federation

Australia & New Zealand
Tel: AU 1300 87 5465
NZ 0800 87 5465
E-mail: support@tp-link.com.au
Service time: 24hrs, 7 days a week

Italy
Tel: +39 02 66987799
E-mail: support.it@tp-link.com
Service time: 9:00 AM to 6:00 PM, from Monday to Friday

Ukrainian
Tel: +380 (44) 590-51-14
E-mail: support.ua@tp-link.com
Service time: Monday to Friday 14:00 PM to 22:00 PM

Brazilian
Toll Free: 0800-770-4337 (Portuguese Service)
E-mail: support.br@tp-link.com
Service time: Monday to Saturday 08:00 AM to 08:00 PM

India
Tel: +91 80 421 6259 135
E-mail: support.in@tp-link.com
Service time: Monday to Friday 9:00-12:00, 13:00-18:00
*Except public holidays

Japan
Tel: +81 (0) 3 5561 2271
E-mail: support.jp@tp-link.com
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

South Korea
Tel: +82 (0) 2 3123 4567
E-mail: support.kr@tp-link.com
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

Spain
Tel: +34 (0) 91 1234 5678
E-mail: support.es@tp-link.com
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

France
Tel: +33 (0) 1 2345 6789
E-mail: support.fr@tp-link.com
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

China
Tel: +86 (0) 755 2650 4400
E-mail: support.cn@tp-link.com
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)

South Africa
Tel: +27 (0) 21 1234 5678
E-mail: support.za@tp-link.com
Service time: Monday to Friday 9:00 AM to 6:00 PM. GMT+1 or GMT+2 (Daylight Saving Time)