


Thunderbolt 5/USB4 Dock, Triple Display, 5x USB, 2.5GbE, 140W PD


Product ID

215N-TB5USB4DOCK
215UE-TB5USB4DOCK

Front View

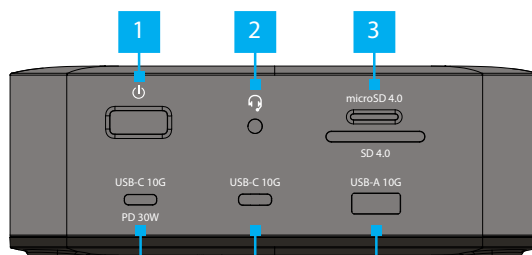

Rear View

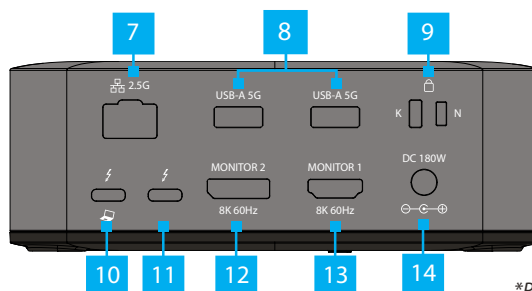

*Product may vary from image

Component		Function
1	Power Button	• Press and release to toggle Power on or off for the Docking Station
2	Headset Port	• Connect a 3.5mm Headset
3	microSD and SD Card Slots	• microSD Card Slot • Supports UHS-II and UHS-I • Compatible with microSDHC/microSDXC/microSDUC Cards • SD Card Slot • Supports UHS-II and UHS-I • Compatible with SDHC/SDXC/SDUC Cards
4	USB-C 10Gbps Port with Charging	• Connect and/or charge a USB Peripheral • Supports USB 10Gbps and USB Power Delivery up to 30W
5	USB-C 10Gbps Port	• Connect and/or charge a USB Peripheral
6	USB-A 10Gbps Port	• Connect and/or charge a USB Peripheral
7	2.5 Gigabit Ethernet Port	• Connect the Docking Station to a Network • Supports 2.5GBASE-T
8	USB-A 5Gbps Port	• Connect a USB Peripheral • Supports USB 5Gbps
9	2x Lock Slots (Nano/Standard)	• Connect a K-Slot or Nano Locking Device to deter theft of the Docking Station
10	Thunderbolt 5 Host Connection	• Connect to a Thunderbolt 5 Port on the Host Computer • Supports Power Delivery 3.1 for up to 140W Laptop Charging
11	Thunderbolt 5 Port	• Connect a Thunderbolt Device or an External Display • Supports DP Alt Mode for use with Video Adapters
12	DisplayPort Output	• Connect to a DisplayPort Display
13	HDMI Output	• Connect to an HDMI Display
14	Power Input	• Connect the Docking Station to a Power Source using the included Universal Power Adapter

Package Contents

- Thunderbolt 5 Docking Station x 1
- Thunderbolt 5 Host Cable x 1
- Universal Power Adapter x 1
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/215N-TB5USB4DOCK
www.StarTech.com/215UE-TB5USB4DOCK

- Computer x 1
 - This Docking Station can function with Thunderbolt 5 or USB4 host ports.
 - Video support and performance, such as the number of external displays, their resolution, and refresh rate, depend on the host computer and the performance of the video card or host port.

Installation

1. Connect the **Power Adapter** from an **AC Outlet**, to the **DC 20V Port** on the **Docking Station**.
2. Connect a **3.5mm Headset** to the **3.5mm Headset Port** on the front of the **Docking Station**.
3. Connect a **Network Cable** from a **Network Port/Device** to the **2.5 Gigabit Ethernet Port** on the back of the **Docking Station**.
4. Connect **USB Devices** or **Peripherals** to the **USB-A** and **USB-C Ports** located on the front and rear of the **Docking Station**.
5. Connect a **Thunderbolt Device** or **USB-C Video Adapter** to the **Thunderbolt 5 Port**.
6. Connect an **HDMI Display** to the **HDMI Output** on the back of the **Docking Station** using an **HDMI Cable** (sold separately).
7. Connect a **DisplayPort Display** to the **DisplayPort Output** on the back of the **Docking Station** using a **DisplayPort Cable** (sold separately).
8. (Optional) Insert a **microSD Card** into the **microSD Card Slot** on the front of the **Docking Station**.
***Note:** To remove the microSD Card, push the card in and then pull out the microSD Card.*
9. (Optional) Insert a **SD Card** into the **SD Card Slot** on the front of the **Dock**.
***Note:** To remove the SD Card, pull the SD Card out.*
10. Connect the included **Thunderbolt 5 Host Cable** from the **Thunderbolt 5 Host Connection** on the back of the **Docking Station** to a **Thunderbolt 5 Port** on the **Laptop**.
11. Press the **Power Button** on the front to power on the **Docking Station**.
12. The **Host Computer** will automatically detect the **Docking Station** and install the required **Drivers**.

StarTech.com Ltd.
 45 Artisans Crescent
 London, Ontario
 N5V 5E9
 Canada

StarTech.com LLP
 4490 South Hamilton
 Road
 Groveport, Ohio
 43125
 U.S.A.

StarTech.com Ltd.
 Unit B, Pinnacle 15
 Gowerton Road
 Brackmills,
 Northampton
 NN4 7BW
 United Kingdom

StarTech.com Ltd.
 Siriusdreef 17-27
 2132 WT Hoofddorp
 The Netherlands

FR: startech.com/fr
 DE: startech.com/de
 ES: startech.com/es
 NL: startech.com/nl
 IT: startech.com/it
 JP: startech.com/jp

