Dell Pro 7 13

P713260

Setup and Specifications

Regulatory Model: P208G
Regulatory Type: P208G001
November 2026
Rev. A03

DELL Technologies

Notes, cautions, and warnings

NOTE: A NOTE indicates important information that helps you make better use of your product.

CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

WARNING: A WARNING indicates a potential for property damage, personal injury, or death.

Copyright © Dell Inc. All Rights Reserved. Dell Technologies, Dell, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

Contents

Chapter 1: Views of Dell Pro 7 13 P713260 5
Right view (Option 1) 5
Right view (Option 2) 5
Left view 6
Top view 7
Front view 8
Bottom view 8
Locate the Service Tag or Express Service Code label of your computer 9

Chapter 2: Set up your Dell Pro 7 13 P713260 11

Chapter 3: Specifications of Dell Pro 7 13 P713260 13
Dimensions and weight 13
Processor 13
Chipset 14
Operating system 15
Memory 15
External ports and slots 15
Internal slots 16
Wireless module 16
WWAN module 17
Audio 18
Storage 19
Keyboard 19
Keyboard function key of Dell Pro 7 13 P713260 20
Camera 21
Touchpad 22
Power adapter 22
Power adapter requirements 23
Battery 24
Battery-status light 25
Power requirements 25
Display 25
Fingerprint reader (optional) 26
GPU—Integrated 27
External display support 27
Hardware security 27
Smart-card reader 28
Contacted smart-card reader 28
Contactless smart-card reader 28
Operating and storage environment 29
ComfortView Plus 30
Dell Optimizer 30
Dell support policy 30

Chapter 4: Getting help and contacting Dell..... 31

Chapter 5: Revision history.....32

1

Views of Dell Pro 7 13 P713260

Right view (Option 1)



Figure 1. Right view (Option 1)

1. **Nano-SIM card slot (optional)**

   Insert a nano-SIM card to connect to a mobile broadband network.

   NOTE: Availability of the nano-SIM-card slot depends on the region and configuration ordered.

2. **USB Type-C port with USB 3.2 Gen2x2/DisplayPort 1.4/Power Delivery**

   Supports USB 3.2 Gen2x2 (20 Gbps), DisplayPort 1.4 and also enables you to connect to an external display using a display adapter.

3. **Global headset port**

   Connect headphones or a headset.

4. **Security-cable slot (wedge-shaped)**

   Connect a security cable to prevent unauthorized movement of your computer.

Right view (Option 2)



Figure 2. Right view (Option 2)

1. **Nano-SIM card slot (optional)**

   Insert a nano-SIM card to connect to a mobile broadband network.

   NOTE: Availability of the nano-SIM-card slot depends on the region and configuration ordered.

2. **Global headset port**

   Connect headphones or a headset.

3. **USB 3.2 Gen 1 port with PowerShare**

   Connect devices such as external storage devices and printers. It provides data transfer speeds up to 5 Gbps with PowerShare.

4. **Security-cable slot (wedge-shaped)**

   Connect a security cable to prevent unauthorized movement of your computer.

Left view

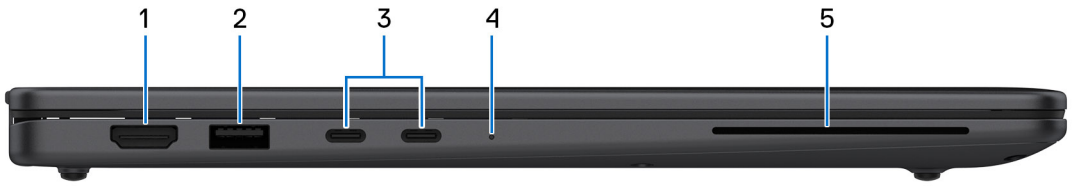


Figure 3. Left view

1. **HDMI 2.1 port**

   Connect to a TV, external display, or another HDMI-in enabled device. Provides video and audio output.

2. **USB 3.2 Gen 1 port**

   Connect devices such as external storage devices and printers. It provides data transfer speeds up to 5 Gbps.

3. **USB Type-C ports with DisplayPort Alt Mode/Thunderbolt 4/USB4/Power Delivery (2)**

   Supports USB4, DisplayPort 2.1, Thunderbolt 4 and also enables you to connect to an external display using a display adapter.

4. **Battery-status light**

   Battery-status light indicates the battery-charge status.

   - White—Battery is charging.
   - Solid amber—Battery charge is low.
   - Off—Battery is fully charged.

5. **Smart-card reader slot (optional)**

   Using smart card provides authentication in corporate networks.

Top view

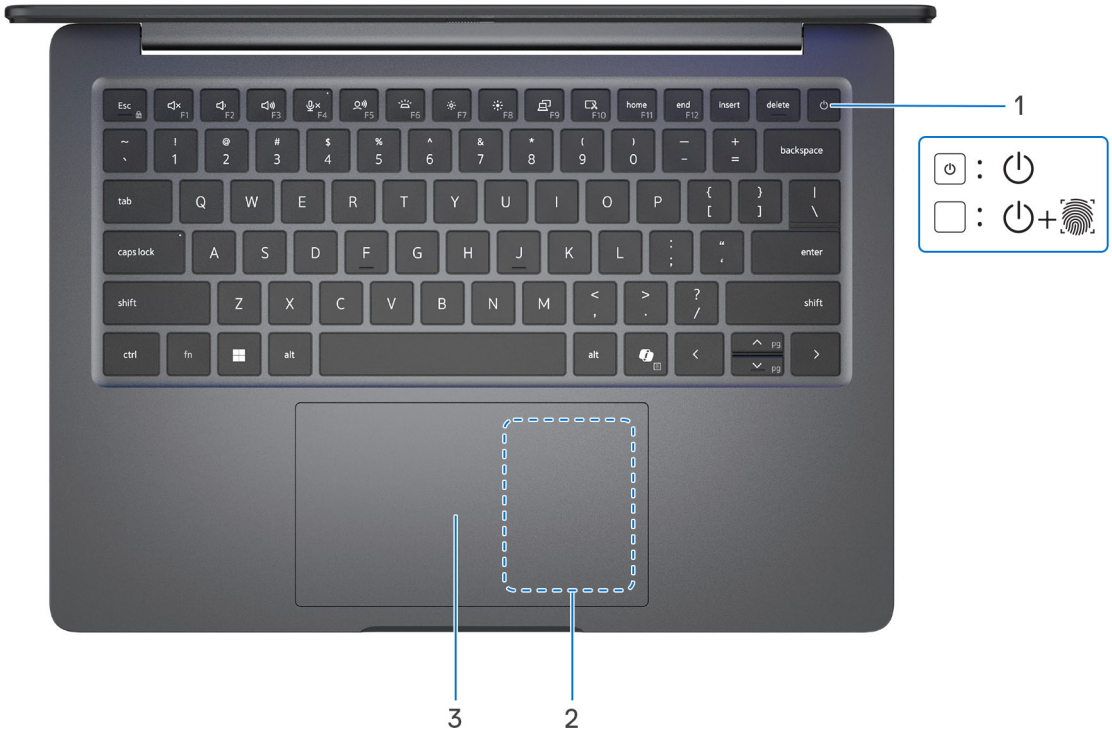


Figure 4. Top view

1. **Power button with optional fingerprint reader**

   Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

   When the computer is turned on, press the power button to put the computer into a sleep state; press and hold the power button for 10 seconds to force shut-down the computer.

   If the power button has a fingerprint reader, place your finger on the power button steadily to log in.

   NOTE: The power-status light on the power button is available only on computers without the fingerprint reader.

   NOTE: Register your fingerprint as password in Windows settings.

2. **NFC/contactless smart card reader (optional)**

   Enables NFC-enabled devices to communicate with your computer.

3. **Touchpad**

   Move your finger on the touchpad to move the mouse pointer. Tap with a finger to left-click and tap with two fingers to right-click.

Front view



Figure 5. Front view

1. **Microphones (2)**

   Provides digital sound input for audio recording and voice calls.

2. **Infrared camera**

   Enables secure, contactless user authentication by supporting facial recognition through Windows Hello.

3. **IR illuminator**

   Emits infrared light to support the infrared camera in detecting facial features and tracking motion for secure and responsive functionality.

4. **Camera shutter**

   Features a manual privacy shutter that can slide to access the camera lens and slide over to block its view and safeguard your privacy when the camera is not in use.

5. **RGB camera**

   Allow users to conduct video calls, capture still images, and record video content for communication and documentation purposes.

6. **Camera-status light**

   Illuminates automatically to indicate active camera usage, alerting users when the camera is recording or streaming.

Bottom view

Figure 6. Bottom view

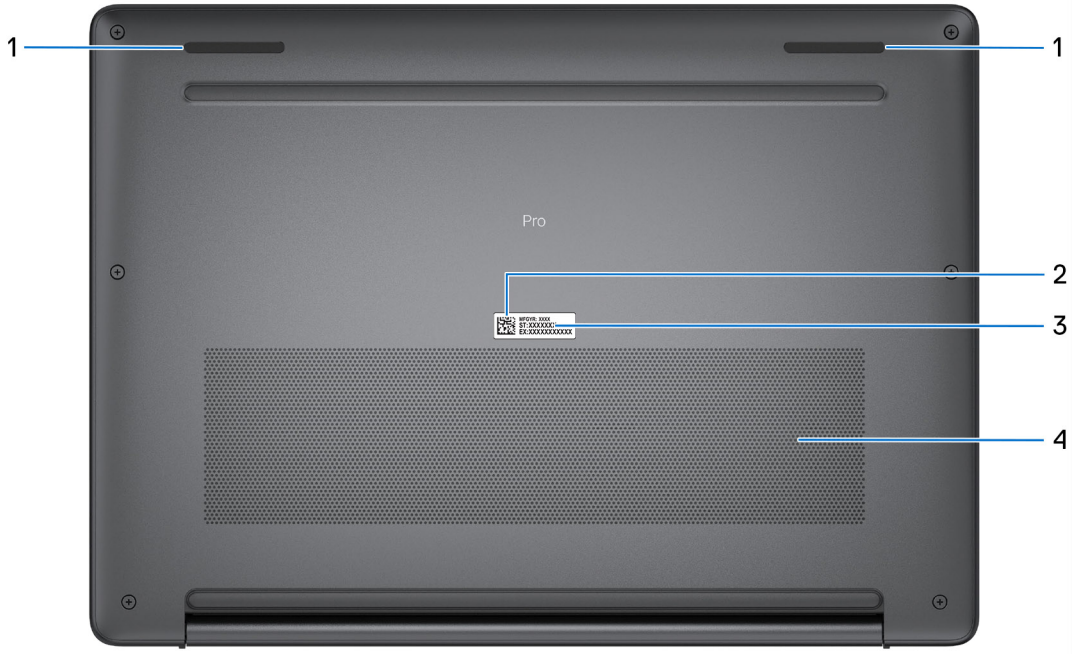


Figure 7. Bottom view

1. **Speakers (2)**

   Provide audio output.

2. **MyDell QR code**

   MyDell is your hub for content that is personalized to your Dell Pro 7 13 P713260, including videos, articles, manuals, and access to support.

3. **Service Tag label**

   The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

4. **Air vents**

   Air vents provide ventilation for your computer. Clogged air vents can cause overheating and can affect your computer's performance and potentially cause hardware issues. Keep the air vents clear of obstructions and clean them regularly to prevent the build-up of dust and dirt. For more information about cleaning air vents, search Dell Support site.

Locate the Service Tag or Express Service Code label of your computer

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search Dell Support Site.



Figure 8. Service Tag/Express Service Code location

2

Set up your Dell Pro 7 13 P713260

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter and press the power button.

   NOTE: To conserve battery power, the battery might enter power-saving mode. Ensure that the power adapter is connected before turning on the computer.



Figure 9. Connect the power adapter and press the power button

2. Finish the operating system setup.

   For Ubuntu:

   Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search Dell Support Site.

   For Windows:

   Follow the on-screen instructions to complete the setup. For more information, search for *Windows Setup* at Dell Support Site.

3. Locate and use Dell apps from the Windows Start menu. This step is optional but recommended.

Table 1. Locate Dell apps

Resources	Description
Dell Optimizer	Dell Optimizer is an application that is designed to enhance computer performance and productivity by optimizing settings for power, battery, display, and presence detection. It also provides access to applications purchased with your new computer.

Table 1. Locate Dell apps (continued)

Resources	Description
	For more information, see Dell Optimizer User's Guide at Dell Support Site.
	**Dell Product Registration** Register your computer with Dell.
	**Dell Help & Support** Access help and support for your computer.
	**SupportAssist** SupportAssist is a proactive and predictive technology that offers automated technical support for Dell computers. It proactively monitors both hardware and software, addressing performance issues, preventing security threats, and automating engagement with Dell Technical Support. For more information, see the SupportAssist documentation at Dell Support Site. **NOTE:** In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.

3

Specifications of Dell Pro 7 13 P713260

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell Pro 7 13 P713260.

Table 2. Dimensions and weight

Description	Values
Height:	
Front height	10.68 mm (0.42 in.)
Rear height	13.96 mm (0.55 in.)
Starting Height (maximum)	16.35 mm (0.64 in.)
Width	300 mm (11.8 in.)
Depth	216.3 mm (8.5 in.)
Minimum weight **NOTE:** The weight of your computer depends on the configuration that you ordered.	1.19 kg (2.62 lb)

Processor

The following table lists the details of the processors that are supported on your Dell Pro 7 13 P713260.

Table 3. Processor

Description	Option one	Option two	Option three	Option four	Option five
Type	Series 3 Intel Core Ultra 5 325	Series 3 Intel Core Ultra 5 335 vPro	Series 3 Intel Core Ultra 7 365 vPro	Series 3 Intel Core Ultra 5 336H vPro	Series 3 Intel Core Ultra 7 366H vPro
TDP **NOTE:** Thermal Design Power (TDP) is an indicator of maximum performance at sustained workloads. TDP has been measured in Best Performance mode at 28 degrees	19 W	19 W	19 W	21 W	21 W

Table 3. Processor (continued)

Description	Option one	Option two	Option three	Option four	Option five
ambient temperature.					
Total cores	8	8	8	12	16
Number of Performance-cores	4	4	4	4	4
Total threads **NOTE:** : Intel Hyper-Threading Technology is only available on Performance-cores.	8	8	8	12	16
Speed	1 GHz to 3.1 GHz	1 GHz to 3.2 GHz	1.1 GHz to 3.4 GHz	1 GHz to 3.7 GHz	1 GHz to 3.8 GHz
Performance-core frequency					
Base frequency	2.1 GHz	2.2 GHz	2.4 GHz	1.9 GHz	2.0 GHz
Maximum turbo frequency	4.5 GHz	4.6 GHz	4.8 GHz	4.6 GHz	4.8 GHz
Efficient-core frequency					
Base frequency	1.6 GHz	1.6 GHz	1.8 GHz	1.5 GHz	1.6 GHz
Maximum turbo frequency	3.2 GHz	3.2 GHz	3.4 GHz	3.4 GHz	3.6 GHz
Processor cache	12 MB	12 MB	12 MB	18 MB	18 MB
Integrated graphics	Intel Graphics	Intel Graphics	Intel Graphics	Intel Graphics	Intel Graphics
NPU TOPS	47	47	49	47	50
NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.					

Chipset

The following table lists the details of the chipset that is supported on your Dell Pro 7 13 P713260.

Table 4. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	Intel Core Ultra 5/7
DRAM bus width	64-bit
Flash EPROM	16 MB + 32 MB
PCIe bus	Up to Gen5

Operating system

Your Dell Pro 7 13 P713260 supports the following operating systems:

- Windows 11 Professional
- Windows 11 Home
- Ubuntu Linux 24.04 LTS

Memory

The following table lists the memory specifications of your Dell Pro 7 13 P713260.

Table 5. Memory specifications

Description	Values
Memory slots	Onboard memory **NOTE:** The memory is integrated on the system board and is not upgradeable.
Memory type	LPDDR5x
Memory speed	Up to 8533 MT/s
Maximum memory configuration	64 GB
Minimum memory configuration	16 GB
Memory configurations supported	• 16 GB: LPDDR5x, up to 8533 MT/s, dual-channel • 32 GB: LPDDR5x, up to 8533 MT/s, dual-channel • 64 GB: LPDDR5x, up to 8533 MT/s, dual-channel **NOTE:** Memory speed may vary depending on the processor option.
Memory speed supported	• Up to 7467 MT/s with Series 3 Intel Core Ultra 5 32x/33x vPro, and Intel Core Ultra 7 36x vPro processors • Up to 8533 MT/s with Series 3 Intel Core Ultra 5 336H vPro/36xH vPro processors

External ports and slots

The following table lists the external ports and slots on your Dell Pro 7 13 P713260.

Table 6. External ports and slots

Description	Values
Network port	Not applicable
USB ports	• Two Thunderbolt 4/USB4 (40 Gbps) Type-C ports with Power Delivery and DisplayPort 2.1 • One USB 3.2 Gen2x2 (20 Gbps) Type-C port with Power Delivery and DisplayPort 1.4 (optional) • One USB 3.2 Gen1 (5 Gbps) Type-A port with PowerShare (optional) • One USB 3.2 Gen1 (5 Gbps) Type-A port

Table 6. External ports and slots (continued)

Description	Values
Audio port	One global headset port
Video port(s)	One HDMI 2.1 port
Media-card reader	Not supported
Power-adapter port	Supported through the USB Type-C port
Security-cable slot	One security-cable slot (wedge-shaped)
SIM-card slot	One nano-SIM card slot (optional)
Smart card reader	One smart-card reader slot (optional)

Internal slots

The following table lists the internal slots of your Dell Pro 7 13 P713260.

Table 7. Internal slots

Description	Values
M.2	• One M.2 2230/2280 solid state drive slot • One M.2 3042 for 4G WWAN slot (optional) • One M.2 3052 for 5G WWAN slot (optional) **NOTE:** To learn more about the features of different types of M.2 cards, search Dell Support Site.

Wireless module

The following table lists the Wireless Local Area Network (WLAN) modules that are supported on your Dell Pro 7 13 P713260.

Table 8. Wireless module specifications

Description	Option one	Option two
Model number	Intel Wi-Fi 6E AX211	Intel Wi-Fi 7 BE211
Transfer rate	Up to 2400 Mbps	Up to 5760 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz	2.4 GHz/5 GHz/6 GHz
Wireless standards	• WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6E (WiFi 802.11ax)	• WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6E (WiFi 802.11ax) • Wi-Fi 7 (WiFi 802.11be)
Encryption	• 64-bit/128-bit WEP • AES-CCMP • TKIP	• 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth Core Specification	Bluetooth Core 5.4	Bluetooth Core 6.0

Table 8. Wireless module specifications (continued)

Description	Option one	Option two
NOTE: These wireless cards are qualified against the listed Bluetooth Core specifications.		

WWAN module

The following table lists the Wireless Wide Area Network (WWAN) modules that are supported in your Dell Pro 7 13 P713260.

NOTE: The WWAN module is available only on certain configurations and in certain regions.

NOTE: Availability of the eSIM feature on this module may vary by region and mobile carrier support.

NOTE: For instructions on how to setup SIM or eSIM connections on your computer, see the *SIM/eSIM Setup Guide for Windows* available with your product documentation at Dell Support Site.

Table 9. WWAN module specifications

Description	Option one	Option two
Model number	DW5826e-m, Qualcomm Snapdragon SDX12 Global LTE-Advanced, CAT12 **NOTE:** For computers that are shipped with 4G WWAN support, only the 4G WWAN card is compatible with your computer.	DW5933e-m MediaTek T700 Global 5G Modem **NOTE:** For computers that are shipped with 5G WWAN support, only the 5G WWAN card is compatible with your computer.
Form factor	M.2 3042 Key-B	M.2 3052 Key-B
Host interface	USB 3.0/2.0	PCIe Gen3
Network standard	• LTE FDD • TDD • WCDMA • GPS • BDS • GLONASS • Galileo • QZSS	• NR FR1(Sub6) FDD • TDD, LTE FDD • TDD, WCDMA • HSPA+ • GPS • GLONASS • BDS • QZSS • Galileo
Transfer data rate	• Up to 600 Mbps DL (CAT12) • Up to 150 Mbps UL	• SA: DL 4.67 Gbps/ UL 1.25 Gbps • NSA: DL 3.74 Gbps/ UL 835 Mbps • LTE: DL 1.6 Gbps (CAT19)/ UL 211 Mbps
Operating frequency bands	• LTE (B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B18, B19, B20, B25, B26, B28, B29, B32, B38, B39, B40, B41, B42, B43, B48, B66, B71) • WCDMA (1,2,4,5,6,8,9,19)	• LTE (1, 2, 3, 4, 5, 7, 8, 12, 13, 14, 17, 18, 19, 20, 25, 26, 28,29, 30, 32, 34, 38, 39, 40, 41, 42, 43, 46, 66, 71) • NR (1, 2, 3, 5, 7, 8, 20, 25, 28, 38, 40, 41, 48, 66, 71, 77, 78,79) • HSPA+ (1, 2, 4, 5, 8)
Power supply	DC 3.135 V to 4.4 V, Typical 3.3 V	DC 3.135 V to 4.4 V, Typical 3.3 V
SIM card	Supported through the external SIM slot.	Supported through the external SIM slot.

Table 9. WWAN module specifications (continued)

Description	Option one	Option two
eSIM with dual SIM (DSSA)	Supported	Supported
Antenna diversity	Supported	Supported
Radio on/off	Supported	Supported
Wake on wireless WAN	Supported	Supported
Operating temperature	• Normal operating temperature: -30 °C to 70 °C (-22 °F to 158 °F) • Extended operating temperature: -40 °C to 85 °C (-40 °F to 185 °F) • Storage temperature: -40 °C to 85 °C (-40 °F to 185 °F)	• Normal operating temperature: -10 °C to 55 °C (14 °F to 131 °F) • Extended operating temperature: -40 °C to 85 °C (-40 °F to 185 °F) • Storage temperature: -60 °C to 100 °C (-76 °F to 212 °F)
Antenna connector	• WWAN Main Antenna x 1 • WWAN Diversity Antenna x 1	• WWAN TX0 and PRX Connector × 1 • WWAN DRX Combined GPS Connector × 1 • WWAN MIMO PRX Connector × 1 • WWAN TX1 and MIMO DRX Connector × 1 • 4x4 MIMO Antenna x 2
NOTE: For instructions to find your computer's International Mobile Equipment Identity (IMEI) number, search Dell Support Site.		

Audio

The following table lists the audio specifications of your Dell Pro 7 13 P713260.

Table 10. Audio specifications

Description	Values
Audio controller	Cirrus Logic CS42L45
Stereo conversion	Supported
Internal audio interface	Soundwire Interface
External audio interface	Global headset port
Number of speakers	Two
Internal-speaker amplifier	Supported with discrete speaker amplifier
External volume controls	Keyboard shortcut controls
Speaker output:	
Average	2.0 W
Peak	2.5 W
Microphone	Digital-array microphones

Storage

This section lists the storage options on your Dell Pro 7 13 P713260.

Your Dell Pro 7 13 P713260 supports one of the following storage configurations:

- One M.2 2230/2280 solid-state drive

Table 11. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid state drive, QLC	PCIe Gen4 64 Gbps	Up to 1 TB
M.2 2230 solid state drive, TLC	PCIe Gen4 64 Gbps	Up to 512 GB
M.2 2280 solid state drive, TLC with DRAM SED Ready	PCIe Gen4 64 Gbps	Up to 2 TB
M.2 2280 solid state drive, TLC with DRAM SED Ready	PCIe Gen5 128 Gbps	Up to 1 TB
M.2 2280 solid state drive, TLC with DRAM SED	PCIe Gen5 128 Gbps	Up to 2 TB

Keyboard

The following table lists the keyboard specifications of your Dell Pro 7 13 P713260.

Table 12. Keyboard specifications

Description	Values
Keyboard type	• Standard backlit (Mini LED) keyboard • Standard non-backlit keyboard
Keyboard layout	• Belgian, French European: AZERTY • QWERTY: other keyboard languages
Number of keys	• Arabic, Canada Bilingual (MUI), Chinese (Traditional), French-Canadian, English International, English US, French-Canadian, Greek, Hebrew, Korean, Thai, Ukrainian, Russian, English International (non-backlit), English US (non-backlit), Thai (non-backlit): 79 keys • Belgian, Brazilian, Bulgarian, Czech & Slovakian (MUI), Danish, English UK, Estonian, French-Canadian (80-key variant), French European, German, Hungarian, Icelandic, Italian, Nordic (MUI), Norwegian, Portuguese Iberian, Slovenian, Spanish (Castillian), Spanish (Latin America), Swedish/Finnish, Swiss European (MUI), Turkish, Turkish F: 80 keys • Brazilian: 81 keys • Japan: 83 keys
Key pitch	Horizontal = 18.05 mm Vertical = 18.05 mm
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions.

Table 12. Keyboard specifications (continued)

Description	Values
	• To type the alternate character, press Shift and the desired key. • To perform secondary functions, press Fn and the desired key. **NOTE:** You can define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in the BIOS Setup program. **NOTE:** If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, search Dell Support site.

Keyboard function key of Dell Pro 7 13 P713260

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, 2 is typed out; if you press **Shift** + **2**, @ is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon on the key. Press the function key to enable the task represented by the icon. For example, pressing F1 mutes the audio (see the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **fn** + **Esc**. Later, multimedia control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn** + **F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in the BIOS setup program.

Table 13. Function key primary behavior

Function key	Primary behavior
Esc	Esc
F1	Mute or unmute audio
F2	Decrease volume
F3	Increase volume
F4	Mute/Unmute
F5	• German keyboard: Copilot • Other keyboard: Dictation
F6	Turn on or turn off keyboard backlight
F7	Decrease brightness
F8	Increase brightness
F9	Switch to external display
F10	Print Screen
F11	Home

Table 13. Function key primary behavior (continued)

Function key	Primary behavior
F12	End

The **fn** key is also used with selected keys on the keyboard to invoke secondary functions.

Table 14. Secondary behavior

Function key	Secondary behavior
Esc	Fn Toggle
fn + F1	Operating system and application-specific F1 behavior
fn + F2	Operating system and application-specific F2 behavior
fn + F3	Operating system and application-specific F3 behavior
fn + F4	Operating system and application-specific F4 behavior
fn + F5	Operating system and application-specific F5 behavior
fn + F6	Operating system and application-specific F6 behavior
fn + F7	Operating system and application-specific F7 behavior
fn + F8	Operating system and application-specific F8 behavior
fn + F9	Operating system and application-specific F9 behavior
fn + F10	Operating system and application-specific F10 behavior
fn + F11	Operating system and application-specific F11 behavior
fn + F12	Operating system and application-specific F12 behavior
fn + B	Pause or Break
fn + S	Toggle scroll lock
fn + R	Snip screen
fn + Ctrl + B	Break
fn + Shift + B	The hotkey sequence will be disabled by default to prevent accidental actuation.
fn + PgUp	Scroll up the document or page
fn + PgDn	Scroll down the document or page
fn + Home	Move to the beginning of the document
fn + End	Move to the end of the document

Camera

The following table lists the camera specifications of your Dell Pro 7 13 P713260.

Table 15. Camera specifications

Description	Option One	Option two
Number of cameras	Two	Two
Camera type	FHD RGB+IR HDR camera with Presence Detection	8 MP RGB+IR HDR camera with Presence Detection
Camera location	Front camera	Front camera

Table 15. Camera specifications (continued)

Description	Option One	Option two
Camera sensor type	CMOS sensor technology	CMOS sensor technology
Camera resolution:		
Still image (megapixels)	2.07 megapixels	8.29 megapixels
Video	1920 x 1080 (FHD) at 30 fps	2560 x 1440 (QHD) at 30 fps
Infrared camera resolution:		
Video	360 x 360 at 15 fps	360 x 360 at 15 fps
Still image (megapixels)	0.13 megapixels	0.13 megapixels
Diagonal viewing angle:		
Camera	83.0 degrees	84.7 degrees
Infrared camera	81.3 degrees	81.3 degrees

Touchpad

The following table lists the touchpad specifications of your Dell Pro 7 13 P713260.

Table 16. Touchpad specifications

Description	Values
Touchpad resolution:	>=300 dpi
Touchpad dimensions:	
Horizontal	125 mm (4.92 in.)
Vertical	72 mm (2.83 in.)
Touchpad gestures	For more information about the touchpad gestures available on Windows, search Microsoft Support Site.

Power adapter

The following table lists the power adapter specifications of your Dell Pro 7 13 P713260.

Table 17. Power-adapter specifications

Description	Option one	Option two	Option three	Option four
Type	65 W USB-C GAN Slim Adapter (2-pin, Wall-mount)	65 W USB-C GAN Slim Adapter	65 W USB-C Adapter	100 W USB-C Adapter
Power-adapter dimensions:				
Height	22 mm (0.87 in.)	28 mm (1.1 in.)	26.5 mm (1.04 in.)	26.5 mm (1.04 in.)
Width	55 mm (2.16 in.)	51 mm (2.01 in.)	60 mm (2.36 in.)	60 mm (2.36 in.)
Depth	66 mm (2.60 in.)	112 mm (4.41 in.)	122 mm (4.80 in.)	122 mm (4.80 in.)

Table 17. Power-adapter specifications (continued)

Description	Option one	Option two	Option three	Option four
Input voltage	100 to 240 VAC	100 to 240 VAC	100 to 240 VAC	100 to 240 VAC
Input frequency	50 Hz to 60 Hz	50 to 60 Hz	50 to 60 Hz	50 to 60 Hz
Input current (maximum)	1.7 A	1.7 A	1.7 A	1.7 A
Output current (continuous)	• 20 V/3.25 A (continuous) • 15 V/3 A (continuous) • 9 V/3 A (continuous) • 5 V/3 A (continuous)	• 20 V/3.25 A (continuous) • 15 V/3 A (continuous) • 9 V/3 A (continuous) • 5 V/3 A (continuous)	• 20 V/3.25 A (continuous) • 15 V/3 A (continuous) • 9 V/3 A (continuous) • 5 V/3 A (continuous)	• 20 V/5 A (Continuous) • 15 V/3 A (Continuous) • 9 V/3 A (Continuous) • 5 V/3 A (Continuous)
Rated output voltage	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC
Temperature range:				
Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
Storage	-20°C to 70°C (-4°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.				

Power adapter requirements

NOTE: If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell Pro 7 13 P713260.

Table 18. Power adapter requirements

Description	Value
Power that is required from a power adapter to achieve optimal performance.	65 W
Power that charges the computer at a slower speed. **NOTE:** A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	Less than 60 W
Minimum power that is required from a power adapter to operate the computer and charge the battery. **NOTE:** A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	27 W
USB Power Delivery (PD) fast charging	Supported
ExpressCharge mode	Supported

Battery

The following table lists the battery specifications of your Dell Pro 7 13 P713260.

Table 19. Battery specifications

Description	Option one	Option two
Battery type	3-cell, 55.8 Wh ExpressCharge, ExpressCharge Boost	3-cell, 55.8 Wh Long Cycle Life, ExpressCharge, ExpressCharge Boost
Battery voltage	11.70 VDC	11.70 VDC
Battery weight (minimum)	0.20 kg (0.44 lb)	0.20 kg (0.44 lb)
Battery dimensions:		
Height	75 mm (2.95 in.)	75 mm (2.95 in.)
Width	258.5 mm (10.18 in.)	258.5 mm (10.18 in.)
Depth	5.65 mm (0.22 in.)	5.65 mm (0.22 in.)
Temperature range:		
Operating	• Charge: 0°C to 45°C (32°F to 113°F) • Discharge: 0°C to 70°C (32°F to 158°F)	• Charge: 0°C to 45°C (32°F to 113°F) • Discharge: 0°C to 70°C (32°F to 158°F)
Storage	-20°C to 65°C (-4°F to 149°F)	-20°C to 65°C (-4°F to 149°F)
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)	4 hours (when the computer is turned off)	4 hours (when the computer is turned off)
Coin-cell battery	No	No

CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.

CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption. If your battery charge is depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.

NOTE: To help preserve battery health, the battery may enter Storage Mode after an extended period of inactivity (approximately three weeks or longer). If the charge level becomes critically low during storage, the battery may disable certain functions as a protective measure. Connect the AC adapter to power on the computer and recharge the battery. For more information about Storage Mode, see Battery Storage Mode at Dell Support Site.

Battery-status light

The following table lists the battery-status light of your Dell Pro 7 13 P713260.

Table 20. Battery-status light behavior

Power source	LED behavior	System power state	Battery charge level
AC adapter	Off	S0 or S5	100%
AC adapter	Solid white	S0 or S5	< 100%
Battery	Off	S0 or S5	10-100%
Battery	Solid amber	S0 or S5	< 10%

- S0 (ON): The computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

Power requirements

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 10. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 73 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Display

The following table lists the display specifications of your Dell Pro 7 13 P713260.

Table 21. Display specifications

Description	Option one	Option two	Option three
Display type	13.3-inch Wide Ultra Extended Graphics Array (WUXGA)	13.3-inch Wide Ultra Extended Graphics Array (WUXGA), ComfortView Plus (Low Blue Light)	13.3-inch Wide Ultra Extended Graphics Array (WUXGA), ComfortView Plus (Low Blue Light) Super Low power, Lightweight
Touch options	No	Yes	No
Display-panel technology	In-plane Switching (IPS), White Light Emitting Diode (WLED)	In-plane Switching (IPS), White Light Emitting Diode (WLED)	In-plane Switching (IPS), White Light Emitting Diode (WLED)
Display-panel dimensions (active area):			

Table 21. Display specifications (continued)

Description	Option one	Option two	Option three
Height	178.78 mm (7.03 in.)	178.78 mm (7.03 in.)	178.78 mm (7.03 in.)
Width	286.04 mm (11.26 in.)	286.04 mm (11.26 in.)	286.04 mm (11.26 in.)
Diagonal	337.31 mm (13.27 in.)	337.31 mm (13.27 in.)	337.31 mm (13.27 in.)
Display-panel native resolution	1920 x 1200	1920 x 1200	1920 x 1200
Luminance (typical)	400 nits	400 nits	500 nits
Megapixels	2.304	2.304	2.304
Color gamut	62.5% sRGB	100% sRGB	100% sRGB
Color depth	6-bit + FRC	8-bit	8-bit
Pixels Per Inch (PPI)	170	170	170
Contrast ratio (typical)	800:1	800:1	1200:1
Response time (maximum)	35 millisecond	35 millisecond	35 millisecond
Refresh rate	60 Hz	60 Hz	20 Hz to 120 Hz
Horizontal view angle	+/- 80 degrees	+/- 80 degrees	+/- 80 degrees
Vertical view angle	+/- 80 degrees	+/- 80 degrees	+/- 80 degrees
Pixel pitch	0.149 mm x 0.149 mm	0.149 mm x 0.149 mm	0.149 mm x 0.149 mm
Power consumption (maximum)	3.75 W	3.64 W	3.35 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Dell Pro 7 13 P713260.

Table 22. Fingerprint reader specifications

Description	Values
Sensor technology	Trans-capacitive sensing
Sensor resolution	500 dpi
Sensor pixel size	108 x 88

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell Pro 7 13 P713260.

Table 23. GPU—Integrated

Controller	Memory size	Processor
Intel Graphics	Shared system memory	Intel Graphics, 4Xe with 8/12/16 cores processor

External display support

The following table lists the external display support for your Dell Pro 7 13 P713260.

Table 24. External display support

Graphics card	Direct Graphics Controller Direct Output Mode	Supported external displays with computer internal display on	Supported external displays with computer internal display off
Intel Graphics	Integrated	3	4

Hardware security

The following table lists the hardware security of your Dell Pro 7 13 P713260.

Table 25. Hardware security

Hardware security
Security-cable slot (wedge-shaped)
Chassis intrusion switch
Trusted Platform Module TPM 2.0
SPI Flash Tamper Detection Circuit
FIPS 140-3 certification for TPM
Dell SafeBIOS including Dell Off-host BIOS Verification
BIOS Resilience
BIOS Recovery and additional BIOS Controls
SafeID including Trusted Platform Module (TPM) 2.0
Self-Encrypting Drives (SED)
D-Pedigree (Secure Supply Chain Functionality)

Smart-card reader

Contacted smart-card reader

The following table lists the contacted smart-card reader specifications of your Dell Pro 7 13 P713260.

Table 26. Contacted smart-card reader specifications

Capability	Description
ISO 7816 -3 Class A Card Support	Reader capable of reading 5 V powered smart card
ISO 7816 -3 Class B Card Support	Reader capable of reading 3 V powered smart card
ISO 7816 -3 Class C Card support	Reader capable of reading 1.8 V powered smart card
ISO 7816-1 Compliant	Specification for the reader
ISO 7816 -2 Compliant	Specification for smart card device physical characteristics (size, location of connection points, and so on)
T=0 support	Cards support character-level transmission
T=1 support	Cards support block-level transmission
EMVCo Compliant	Compliant with EMVCo (for electronic payment standards) smart card standards published to EMVCo Site
EMVCo Certified	Formally certified based on EMVCO smart card standards
PC/SC operating system interface	Personal Computer or Smart Card specification for integration of hardware readers into personal computer environments
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers
Windows Certified	Device certified by Microsoft WHCK
FIPS 201 (PIV/HSPD-12) Compliant via GSA	Device compliant with FIPS 201/PIV/HSPD-12 requirements

Contactless smart-card reader

This section lists the contactless smart-card reader specifications of your Dell Pro 7 13 P713260.

Table 27. Contactless smart-card reader specifications

Capability	Description
FeliCa Card Support	Reader and software capable of supporting FeliCa contactless cards
ISO 14443 Type A Card Support	Reader and software capable of supporting ISO 14443 Type A contactless cards
ISO 14443 Type B Card Support	Reader and software capable of supporting ISO 14443 Type B contactless cards
ISO/IEC 21481	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens
ISO/IEC 18092	Reader and software capable of supporting ISO/IEC 18092 compliant contactless cards and tokens
ISO 15693 Card Support	Reader and software capable of supporting ISO 15693 contactless cards

Table 27. Contactless smart-card reader specifications (continued)

Capability	Description
NFC Tag Support	Supports reading and processing of NFC compliant tag information
NFC Reader Mode	Support for NFC Forum Defined Reader mode
NFC Writer Mode	Support for NFC Forum Defined Writer mode
NFC Peer-to-Peer Mode	Support for NFC Forum Defined Peer-to-Peer mode
EMVCo Compliant	Compliant with EMVCO smart card standards as published to EMVCo Site
EMVCo Certified	Formally certified based on EMVCO smart card standards
NFC Proximity OS Interface	Enumerates NFP (Near Field Proximity) device for operating system to utilize
PC/SC OS interface	Personal Computer/Smart Card specification for integration of hardware readers into personal computer environments
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for operating system level drivers
Windows Certified	Device compatible with Windows operating systems
Dell ControlVault support	The device connects to Dell ControlVault for usage and processing

Table 28. Supported cards

Manufacturer	Card
HID	jCOP readertest3 A card (14443a)
	1430 1L
	DESFire D8H
	iClass (Legacy)
	iClass SEOS
NXP/MIFARE	MIFARE DESFire 8K White PVC Cards
	MIFARE Classic 1K White PVC Cards
	NXP MIFARE Classic S50 ISO Card
G&D	idOnDemand - SCE3.2 144K
	SCE6.0 FIPS 80K Dual+ 1 K Mifare
	SCE6.0 nonFIPS 80K Dual+ 1 K Mifare
	SCE6.0 FIPS 144K Dual + 1K Mifare
	SCE6.0 nonFIPS 144K Dual + 1 K Mifare
	SCE7.0 FIPS 144K
Oberthur	idOnDemand - OCS5.2 80K
	ID-One Cosmo 64 RSA D V5.4 T = 0 card

Operating and storage environment

This table lists the operating and storage specifications of your Dell Pro 7 13 P713260.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 29. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32 °F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

ComfortView Plus

WARNING: Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 inches and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell Pro 7 13 P713260 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the Dell Support Site.

Dell support policy

For information about Dell support policy, search Dell Support Site.

4

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 30. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	Dell Site
Contact Support	In Windows search, type `Contact Support`, and press Enter.
Online help for operating system	Windows Support Site Linux Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at Dell Support Site. For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer.
Dell knowledge base articles	1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select **Support** > **Support Library**. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see Contact Support at Dell Support Site.

NOTE: Availability of the services may vary depending on the country or region, and product.

NOTE: If you do not have an active Internet connection, you can find contact information in your purchase invoice, packing slip, bill, or Dell product catalog.

5

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 31. Revision history

Revision	Date	Description
A03	November 2026	Updated setup and specifications.
A02	June 2026	• Updated operating system setup for Windows. • Updated display specifications. • Updated processor specifications.
A01	May 2026	Updated views topic.
A00	May 2026	Original publish date.