


### Overview

### HPE ProLiant DL380 Gen11

Adaptable for diverse workloads and environments, the secure 2P 2U HPE ProLiant DL380 Gen11 Servers delivers world-class performance with the right balance of expandability and scalability. Designed for supreme versatility and resiliency while being backed by a comprehensive warranty make it ideal for multiple environments from Containers to Cloud to Big Data. Standardize on the industry's most trusted compute platform.

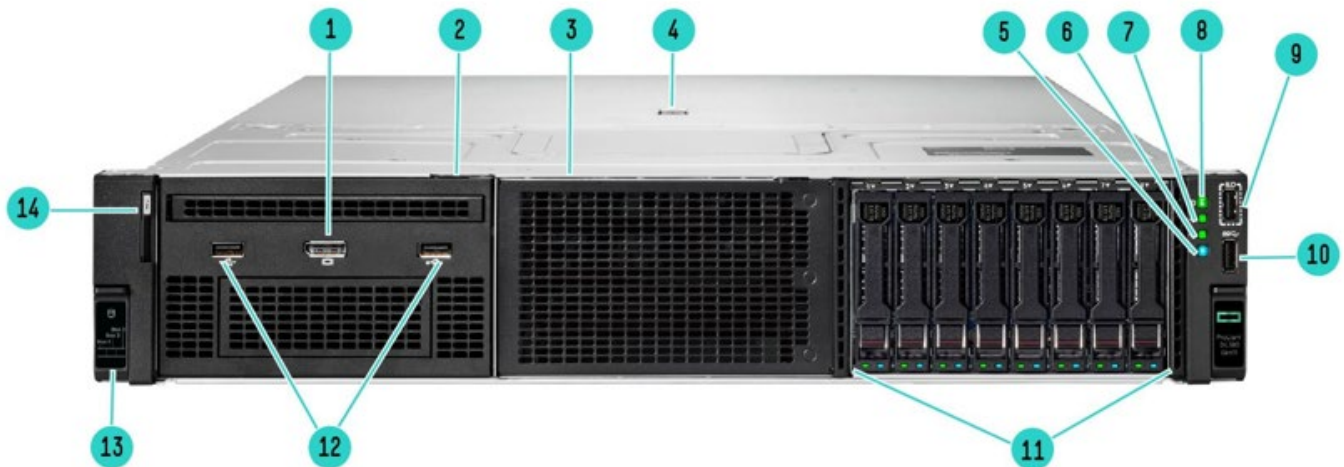


**Front View – 8SFF chassis with optional Universal Media Bay shown**

- |  |   |
|--|---|
| 1. Optional Front Display Port (via Universal Media Bay)     | 8. Power On / Standby button / LED                  |
| 2. Box 1 (shown with optional Universal Media Bay installed) | 9. iLO Service Port                                 |
| 3. Box 2 (Empty)   | 10. USB 3.2 Gen1                                    |
| 4. Quick removal access panel                                | 11. Box 3 (shown with 8SFF drives populated)        |
| 5. Unit Identification button/LED                            | 12. Optional USB 2.0 port (via Universal Media Bay) |
| 6. NIC Status <sup>1</sup>                                   | 13. Drive Support Label                             |
| 7. Health LED  | 14. Serial Number Label Pull Tab                    |


**Notes:** <sup>1</sup>Front NIC LED display doesn't support NIC LED ACT/LINK indication from ALOM/PCIE/FLOM NIC's

### Overview

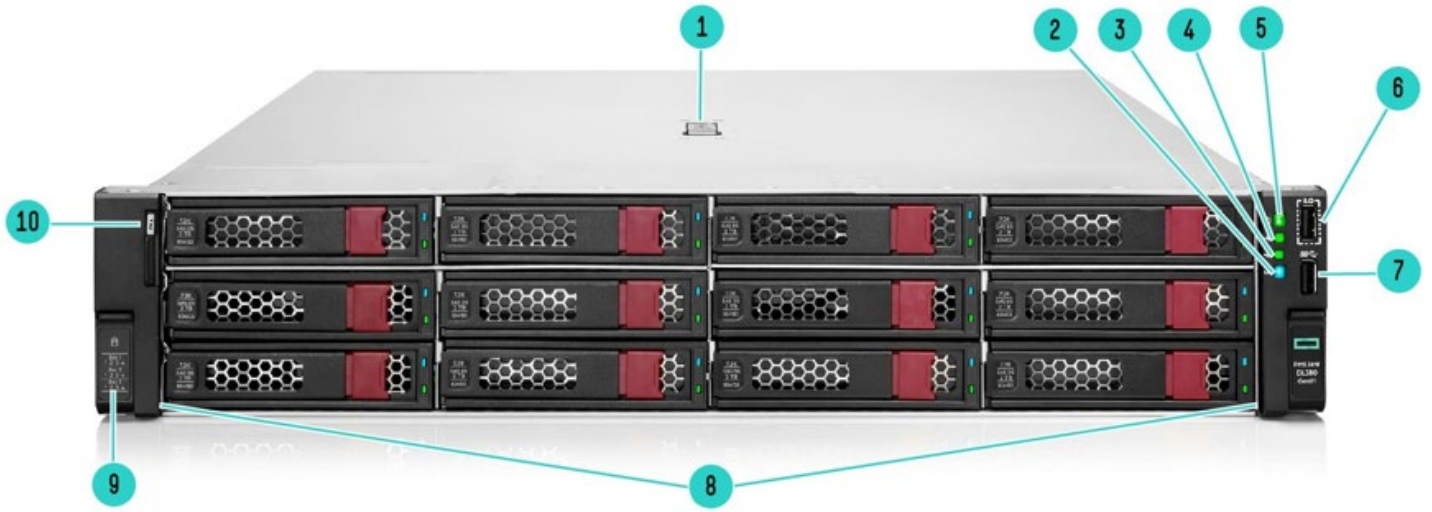

**Front View – 12LFF chassis shown**

- |                                     |                                  |
|-------------------------------------|----------------------------------|
| 1. Quick removal access panel       | 6. iLO Service Port              |
| 2. Unit Identification Button / LED | 7. USB 3.2 Gen1 Port             |
| 3. NIC Status                       | 8. 12 x LFF Media                |
| 4. Health LED                       | 9. Drive support label           |
| 5. Power On / Standby button / LED  | 10. Serial Number Label Pull Tab |

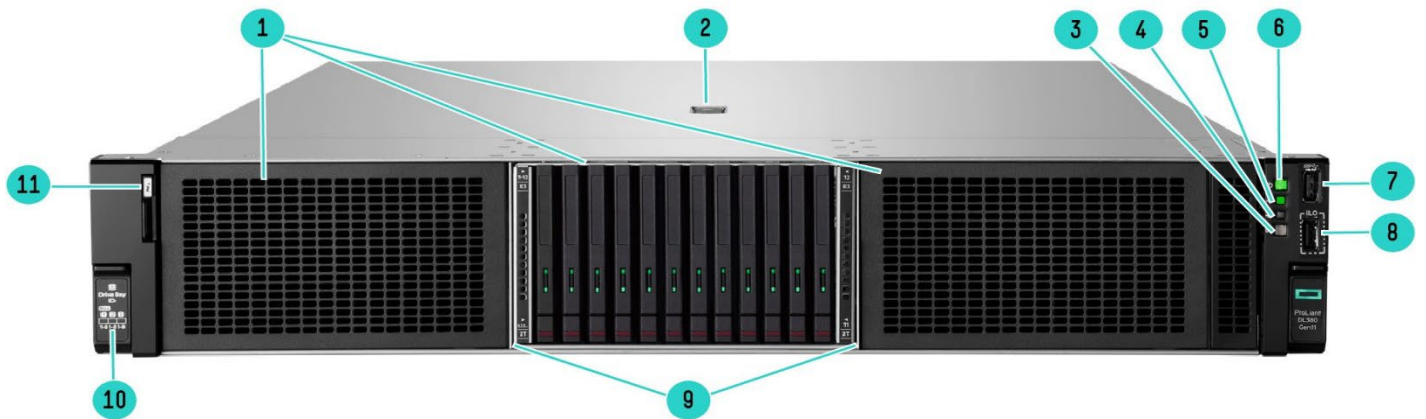


**Front View –12EDSFF chassis shown**

- |                                      |                                  |
|--------------------------------------|----------------------------------|
| 1. 12EDSFF drive bays optical drive  | 7. iLO Service Port              |
| 2. Quick removal access panel        | 8. USB 3.2 Gne1                  |
| 3. UID Button / LED                  | 9. 12x EDSFF Media               |
| 4. NIC Status                        | 10. Drive support label          |
| 5. Health LED                        | 11. Serial Number Label Pull Tab |
| 6. Power On / Standby button and LED |                                  |



## Overview

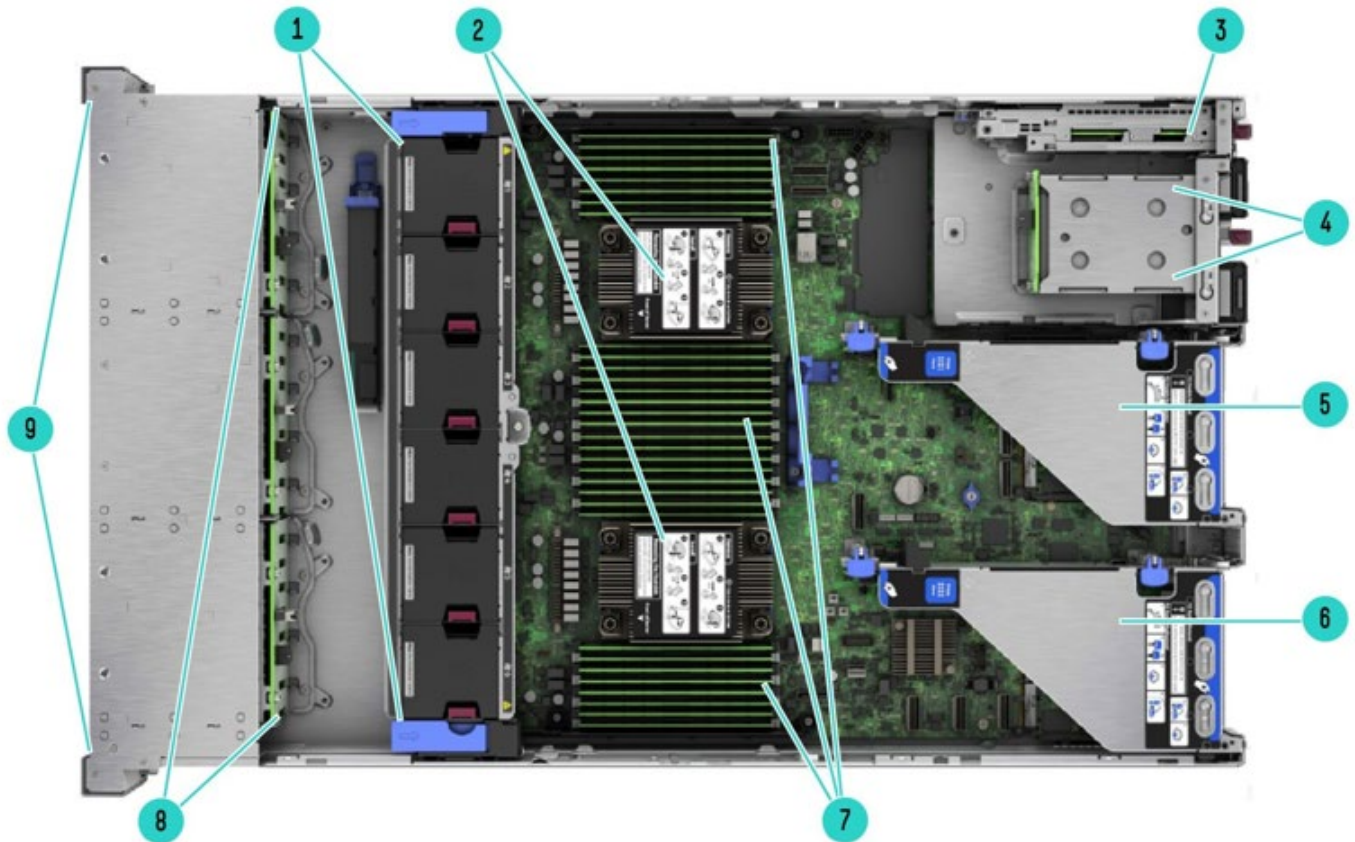


Internal View 8SFF chassis

- |   |   |
|---|---|
| 1. Hot Plug Fans <sup>1</sup>                             | 6. Primary Riser  |
| 2. Processors, heatsinks showing                          | 7. DIMM slots, shown fully populated in 32 slots <sup>2</sup> |
| 3. Optional NS204i-u Boot Device                          | 8. Drive Backplanes   |
| 4. Hot Plug redundant HPE Flexible Slot Power Supplies    | 9. Drive Cages  |
| 5. Secondary Riser (Optional) (Requires second processor) |   |

**Notes:**

- <sup>1</sup>High performance temperature fans optional
- <sup>2</sup>Shown fully populated in 32 slots (16 per processor)

## Overview

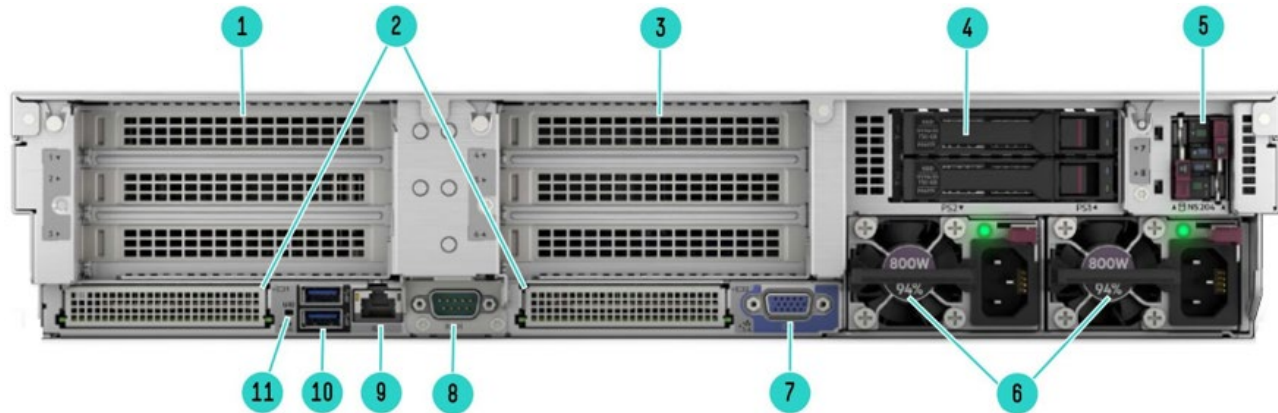

**Rear View – Standard for all DL380 Gen11**

- |   |                                  |
|---|----------------------------------|
| 1. Primary Riser. PCIe 5.0 Slots (Slots 1-3)                                | 6. Power Supply                  |
| 2. OCP NIC 3.0 Slots, shown covered   | 7. VGA Connector                 |
| 3. Secondary Riser. PCIe 5.0 Slots (Slots 4-6)                              | 8. Serial Port Optional          |
| 4. Tertiary Riser (Slots 7-8) shown with optional 2SFF drive cage installed | 9. Dedicated iLO Management Port |
| 5. Optional NS204i-u Boot Device  | 10. USB 3.2 Gen1 Connectors (2)  |
|   | 11. UID Indicator LED            |

**Notes:** <sup>1</sup> Supports various NICs, and Storage controllers.

## Platform Information

### Form Factor

- 2U rack

### Chassis Types

- 8SFF (SAS/SATA/NVMe) with optional 6SFF Universal Media Bay (P50728-B21), and/or up to 6SFF rear drive bay options.
- 24SFF bay (SAS/SATA/NVMe) with up to 6SFF rear drive bay options for a total 30 SFF drives.
- 8LFF supporting 2SFF front, and up to 4LFF rear or 2SFF rear drive bay options.
- 12LFF with optional 4LFF rear for a total of 16LFF drives.
- 12EDSFF (NVMe) supporting up to 36 EDSFF in front and up to 2SFF rear drive bay option

### Notes:

- The 8SFF chassis is upgraded to support up to 24SFF (front) with a variety of 8SFF Drive Cages to select from, including 8SFF U.3 x4/x2 Trimode, 8SFF U.3 (x1 Trimode), and 8SFF SAS/SATA. See “Drive Cages” section within this document for options.
- The 8SFF chassis comes with an 8SFF U.3 x1 Trimode drive bay by default in bay 3.
- The Universal Media Bay (P50728-B21) is only available as an option for the 8SFF chassis and can only be populated in Box 1.
- The 2LFF primary and 2LFF secondary rear cages will consume all PCIe slots for the primary and secondary riser, respectively
- The 8LFF chassis cannot be upgraded to 12LFF front in the field.
- The 2LFF primary and 2LFF secondary rear cages supported in LFF chassis only.

## Overview

### System Fans

- High Performance Fan Kit – required for all CPUs over 205W TDP.

#### Notes:

- On 8SFF CTO server models ship with 4 standard fans.
  - The 12LFF and 8LFF CTO server models ship with 4 standard fans.
  - The 24SFF CTO server model ships with 6 high performance fans.
  - The High-Performance fan kit (P48820-B21) is available to meet ambient temperature requirements.
  - In general, the Maximum Performance fan kit is required when rear drives, or >205W Processors SKUs, or High Performance NVMe drives, three drive cages, mid-tray, GPU card, or certain backplanes are populated. See notes under each option category or each individual option for specifics.
- 



## Standard Features

**Processors** – Up to 2 of the following depending on model.

- The 2nd digit of the processor model number “x4xx” is used to denote the processor generation (i.e. 4=4th generation Intel Scalable Series Processors)
- The required firmware for the 5th Generation Intel Xeon Processors is not compatible with the DL380 Gen11 system board shipped with the 4th Generation Intel Xeon Processors. A new server order (latest firmware system board) is required for the activation of the 5th Generation Intel Xeon Processors. Field upgrade from the 4th Generation Intel Xeon Processors to the 5th Generation is not supported.

For more information regarding Intel Xeon processors, please see the following <https://www.intel.com/xeon>.

This table covers the public Intel offering only.

Processor Suffix	Description	Offering
<b>H</b>	Database and Analytics	Highest core counts. Database and Analytics usages benefit from Intel Data Streaming Accelerator (DSA) and Intel In-Memory Accelerator Analytics (IAA)
<b>M</b>	Media Transcode	Optimized for Intel Advanced Vector Extensions (AVX) frequencies to deliver better performance/watt for Media, AI, and HPC workloads.
<b>N</b>	Network/5G/Edge (High Throughput / Low Latency)	Designed for Network Function Visualization and networking workloads, such as: L3 forwarding, 5G User Plane Function, Open vSwitch Data Plane Development Kit, Vector Packet Processing FIB router, VPP IPsec, web server/NGINX, vEPC, vBNG, and vCMTS.
<b>S</b>	Storage and HCI	Optimized for Storage UMA use cases with increased UPI Bandwidth for vs Mainline SKUs.
<b>P</b>	Cloud - IAAS	Designed for cloud IaaS environments to deliver higher frequencies at constrained TDPs.
<b>Q</b>	Liquid Cooling	Liquid cooled processors with higher frequency and performance at same TDP.
<b>U</b>	Single Socket Optimized	Optimized for targeted platforms adequately served by the cores, memory bandwidth and IO capacity available from a single processor
<b>V</b>	Cloud - SAAS	Optimized for orchestration efficiency that delivers higher core counts and VMs per rack.
<b>Y</b>	Intel SST-PP (Speed Select Technology - Performance Profile)	Intel® SST-PP increases base frequency when fewer cores are enabled. Allows greater flexibility, deployment options and platform longevity.

5 <sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Platinum)								
Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Platinum 8593Q Processor	2.2 GHz	64	320 MB	385W	4	5600 MT/s	512 GB	XCC
Platinum 8592+ Processor	1.9 GHz	64	320 MB	350W	4	5600 MT/s	512 GB	XCC
Platinum 8592V Processor	2.0 GHz	64	320 MB	330W	3	4800 MT/s	512 MB	XCC
Platinum 8581V <sup>1</sup> Processor	2.0 GHz	60	300 MB	270W	0	4800 MT/s	512 GB	XCC
Platinum 8580 Processor	2.0 GHz	60	300 MB	350W	4	5600 MT/s	512 GB	XCC
Platinum 8570 Processor	2.1 GHz	56	300 MB	350W	4	5600 MT/s	512 GB	XCC
Platinum 8568Y Processor	2.3 GHz	48	300 MB	350W	4	5600 MT/s	512 GB	XCC
Platinum 8562Y+ Processor	2.8 GHz	32	60.0 MB	300W	3	5600 MT/s	512 GB	MCC
Platinum 8558P Processor	2.7 GHz	48	260 MB	350W	3	5600 MT/s	512 GB	XCC
Platinum 8558 Processor	2.1 GHz	48	260 MB	330W	4	5200 MT/s	512 GB	XCC
Platinum 8558U1 Processor	2.0 GHz	48	260 MB	300W	0	4800 MT/s	512 GB	XCC

## Standard Features

### Notes:

- In 300Watt processor one socket configuration, the air cooling with Performance Heatsinks & Performance Fan Kits can be supported. Field upgrade to two socket is not supported with air cooling solution.
- <sup>1</sup>Single socket only, no dual socket support
- Intel® Speed Select enabled processors: Platinum 8593Q, 8592V, 8581V, 8568Y+, 8562Y+, 8558P, 8558 and 8558U

### 5<sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Gold 6)

Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Gold 6558Q Processor	3.2 GHz	32	60.0 MB	350W	3	5200 MT/s	128 GB	MCC
Gold 6554S Processor	2.2 GHz	36	180 MB	270W	4	5200 MT/s	128 GB	XCC
Gold 6548N Processor	2.8 GHz	32	60.0 MB	300W	3	5200 MT/s	128 GB	MCC
Gold 6548Y+ Processor	2.5 GHz	32	60.0 MB	250W	3	5200 MT/s	128 GB	MCC
Gold 6544Y Processor	3.6 GHz	16	45.0 MB	270W	3	5200 MT/s	128 GB	MCC
Gold 6542Y Processor	2.9 GHz	24	60.0 MB	250W	3	5200 MT/s	128 GB	MCC
Gold 6538N Processor	2.1 GHz	32	60.0 MB	205W	3	5200 MT/s	128 GB	MCC
Gold 6538Y+ Processor	2.2 GHz	32	60.0 MB	225W	3	5200 MT/s	128 GB	MCC
Gold 6534 Processor	3.9 GHz	8	22.5 MB	195W	3	4800 MT/s	128 GB	MCC
Gold 6530 Processor	2.1 GHz	32	160 MB	270W	3	4800 MT/s	128 GB	XCC
Gold 6526Y Processor	2.8 GHz	16	37.5 MB	195W	3	5200 MT/s	128 GB	MCC

### Notes:

- One or two processor(s)
- Intel® Speed Select enabled processors: Gold 6558Q, 6554S, 6548N, 6548Y+, 6544Y, 6542Y, 6538N, 6538Y+ and 6526Y

### 5<sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Gold 5)

Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Gold 5520+ Processor	2.2 GHz	28	52.5 MB	205W	3	4800 MT/s	128 GB	MCC
Gold 5515+Processor	3.2 GHz	8	22.5 MB	165W	3	4800 MT/s	128 GB	MCC

### Notes:

- One or two processor(s)
- Intel® Speed Select enabled processors: N.A.

### 5<sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Silver)

Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Silver 4516+ Processor	2.2 GHz	24	45.0 MB	185W	2	4400 MT/s	64 GB	MCC
Silver 4514Y Processor	2.0 GHz	16	30.0 MB	150W	2	4400 MT/s	64 GB	MCC
Silver 4510 Processor	2.4 GHz	12	30.0 MB	150W	2	44000 MT/s	64 GB	EE LCC
Silver 4509Y Processor	2.6 GHz	8	22.5 MB	125W	2	4400 MT/s	64 GB	EE LCC

### Notes:

- One or two processor(s)
- Intel® Speed Select enabled processors: 4516Y+, 4514Y and 4509Y

### 5<sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Bronze)

Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Bronze 3508U Processor <sup>1</sup>	2.1 GHz	8	22.5 MB	125W	N/A	4400 MT/s	64 GB	EE LCC

### Notes:

- <sup>1</sup>Single socket capable, no dual socket support
- Intel® Speed Select enabled processors: N.A.
- If 3508U is selected, then 96GB 5600MT/s Memory cannot be selected
- PCIe4.0 only

## Standard Features

4 <sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Platinum)							
Intel Xeon Model	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Platinum 9462 Processor <sup>2</sup>	2.7GHz	32	75	350W	3	4800 MT/s	128
Platinum 8490H Processor	1.9GHz	60	112.5	350W	4	4800 MT/s	512
Platinum 8480+ Processor	2.0GHz	56	105	350W	4	4800 MT/s	512
Platinum 8470 Processor	2.0GHz	52	105	350W	4	4800 MT/s	512
Platinum 8470N Processor	1.7GHz	52	97.5	300W	4	4800 MT/s	128
Platinum 8470Q Processor <sup>1</sup>	2.1GHz	52	105	350W	4	4800 MT/s	512
Platinum 8468 Processor	2.1GHz	48	105	350W	4	4800 MT/s	512
Platinum 8468V Processor	2.4GHz	48	97.5	330W	3	4800 MT/s	128
Platinum 8462Y+ Processor	2.8GHz	32	60	300W	3	4800 MT/s	128
Platinum 8460Y+ Processor	2.0GHz	40	105	300W	4	4800 MT/s	128
Platinum 8458P Processor	2.7GHz	44	82.5	350W	3	4800 MT/s	512
Platinum 8452Y Processor	2.0GHz	36	67.5	300W	3	4800 MT/s	128
Platinum 8444H Processor	2.9GHz	16	45	270W	4	4800 MT/s	512

## Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP equal to or greater than 150W through 350W require High Performance Heatsink (P48818-B21)
- Processors with TDP greater than 205W through 350W and mid-tray drive cage require HPE DL3xx/560 Gen11 High Performance Heatsink (P48905-B21)
- “Q” processors require Max Performance Heatsink (P48817-B21)
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)
- <sup>1</sup>Liquid cooled CPUs require Maximum Performance Heat Sink (P48817-B21). One heatsink covers both CPUs.
- <sup>2</sup>This is Intel High Bandwidth Memory (HBM) CPU.

4 <sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Gold)							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Gold 6454S Processor	2.2GHz	32	60	270W	4	4800 MT/s	128
Gold 6448H Processor	2.4GHz	32	60	250W	3	4800 MT/s	512
Gold 6430 Processor	2.1GHz	32	60	270W	3	4800 MT/s	128
Gold 6414U Processor <sup>1</sup>	2.0GHz	32	60	250W	0	4800 MT/s	128
Gold 6458Q Processor	3.1GHz	32	60	350W	3	4800 MT/s	128
Gold 6448Y Processor	2.1GHz	32	60	225W	3	4800 MT/s	128
Gold 6444Y Processor	3.6GHz	16	45	270W	3	4800 MT/s	128
Gold 6442Y Processor	2.6GHz	24	60	225W	3	4800 MT/s	128
Gold 6438N Processor	2.0GHz	32	60	205	3	4800 MT/s	128
Gold 6438Y+ Processor	2.0GHz	32	60	205W	3	4800 MT/s	128
Gold 6434 Processor	3.7GHz	8	22.5	195W	3	4800 MT/s	128
Gold 6426Y Processor	2.5GHz	16	37.5	185W	3	4800 MT/s	128
Gold 6421N Processor	1.8GHz	32	60	185	0	4400 MT/s	128
Gold 6418H	2.1GHz	24	60	185W	3	4800 MT/s	512
Gold 6416H	2.2GHz	18	45	165W	3	4800 MT/s	512
Gold 5415+ Processor	2.9GHz	8	22.5	150W	3	4400 MT/s	128
Gold 5416S Processor	2.0GHz	16	30	150W	3	4400 MT/s	128
Gold 5418N Processor	1.8GHz	24	45	165W	3	4000 MT/s	128
Gold 5418Y Processor	2.0GHz	24	45	185W	3	4400 MT/s	128
Gold 5420+ Processor	2.0GHz	28	52.5	205W	3	4400 MT/s	128
Gold 5411N Processor	1.9GHz	24	45	165W	0	4400 MT/s	128

## Standard Features

### Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP greater than 150W through 350W require High Performance Heatsink (P48818-B21)
- Processors with TDP greater than 205W through 350W and mid-tray drive cage require HPE DL3xx/560 Gen11 High Performance Heatsink (P48905-B21)
- “Q” processors require Max Performance Heatsink (P48817-B21)
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)
- 8-Channel DDR5 @ 4800 MT/s
- <sup>1</sup>Single socket processor. No dual socket support.

### 4<sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Silver)

Intel Xeon Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Silver 4410Y Processor	2.0GHz	12	30	150W	2	4000 MT/s	64
Silver 4416+ Processor	2.0GHz	20	37.5	165W	2	4000 MT/s	64

### Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP greater than 150W through 350W require High Performance Heatsink (P48818-B21)
- Processors with TDP greater than 205W through 350W and mid-tray drive cage require HPE DL3xx/560 Gen11 High Performance Heatsink (P48905-B21)
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)

### 4<sup>th</sup> Generation Intel® Xeon® Scalable Processor Family (Bronze)

Intel Xeon Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Bronze 3408U	1.8GHz	8	22.5	125W	0	4000 MT/s	64

### Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)

## Chipset

Intel C741 Chipset

**Notes:** For more information regarding Intel® chipsets, please see the following URL:

<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

## On System Management Chipset

HPE iLO 6 ASIC

Read and learn more in the [iLO QuickSpecs](#).

## Memory

One of the following depending on model.

<b>Type</b>	HPE DDR5 Smart Memory, Registered (RDIMM)
<b>DIMM Slots Available</b>	32 16 DIMM slots per processor, 8channels per processor, 2 DIMMs per channel
<b>Maximum capacity</b>	8.0 TB 32 x 256 GB RDIMM @ 4800 MT/s (32 DIMMs only with 8SFF or 16SFF, 16 DIMMs maximum with 24SFF)

**Notes:** The maximum memory speed is limited by the processor selection.



## Standard Features

### Memory Protection

One of the following depending on model.

### Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

## Expansion Slots

### Primary Riser

#### Notes:

- Bus width indicates the number of physical electrical lanes running to the connector.
- There are 2 types of risers supported on Primary Slot
- x16 cards installed on x8 slots could observe sub-optimal performance.

Primary Riser1					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 1
2	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
3	PCIe 5.0	X8	X16	Full-height, half-length slot	Proc 1

Primary Riser2					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1**	NA	NA	NA	NA	NA
1	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
2	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
3	PCIe 5.0	X16	X16	Full-height, half-length slot	Proc 1

**Notes:** \*\* If Slot 1 of HPE DL380 Gen11 2U 3x16 Prim Riser Kit needs to be enabled then 3 x16 Primary Cable Kit (P56073-B21) must be selected.

### Secondary Riser:

#### Notes:

- Bus Width Indicates the number of physical electrical lanes running to the connector.
- There are 2 types of risers support on Secondary Slot
- x16 cards installed on x8 slots could observe sub-optimal performance.

Secondary Riser1					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
4	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 2
5	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
6	PCIe 5.0	X8	X16	Full-height, half-length slot	Proc 2

Secondary Riser2					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
4*	NA	NA	NA	NA	NA
4	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
5	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
6	PCIe 5.0	X16	X16	Full-height, half-length slot	Proc 2

## Standard Features

**Notes:** \* If Slot 4 of HPE DL380 Gen11 2U 3x16 Sec Riser Kit needs to be enabled then 3 x16 Secondary Cable Kit (P56074-B21) must be selected.

### Tertiary Riser

**Notes:**

- Bus Width Indicates the number of physical electrical lanes running to the connector.
- There is 1 type of riser supported on the Tertiary Slot
- x16 cards installed on x8 slots could observe sub-optimal performance.

Tertiary Riser1 (default)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
7	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
8	PCIe 4.0	X16	X16	Full-height, full-length slot	Proc 2

Tertiary Riser1 (with Optional Tertiary Riser FIO x8 Enablement Kit P53632-B21)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
7	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
8	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 2

## Graphics

### Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

## Maximum Internal Storage

Drive	Capacity	Configuration
Hot Plug SFF SAS HDD	91.2 TB	24+8+6 x 2.4TB
Hot Plug SFF SAS SSD	583.3 TB	24 +8+6 15.35TB
Hot Plug SFF SATA HDD	76 TB	24+8+6 x 2 TB
Hot Plug SFF SATA SSD	291.84 TB	24 +8+ 6 x 7.68 TB
Hot Plug LFF SAS HDD	360 TB	12+4+4x 18 TB (with optional rear LFF drive cage)
Hot Plug LFF SATA HDD	360 TB	12+4+4 x 18 TB (with optional rear LFF drive cage)
Hot Plug SFF NVMe PCIe SSD	374.4 TB	24+ x 15.36TB + 6 x 960GB<10W (with optional rear Primary and Secondary 2SFF and rear 2SFF drive cages)
EDSFF NVMe	550.8 TB	36EDSFF Drives x 15.3 TB

**Notes:**

- If all seven Drive cages are selected, then maximum SAS Drive support will be 30 drives (16+8+6).
- Maximum SAS Drive support can be 36 Drives (24+8+4), if one 2SFF Primary / Secondary cage is not selected.

## Internal Storage Devices

- **Optical Drive**  
Optional: DVD-ROM, DVD-RW
- **Hard Drives**  
None ship standard

## Standard Features

### Power Supply

- HPE 1800W-2200W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit  
**Notes: 1 available in 96% efficiency.**
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes: 1 available in 94% efficiency.**
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
- HPE 1000W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit  
**Notes: 1 available in 96% efficiency.**
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes: 1 available in 94% efficiency.**

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen11 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

A standard 6-foot IEC C-13/C-14 jumper cord (A0K02A) is included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page. review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

---

### Storage Controllers

The available Gen11 controllers are depicted below.

#### Software RAID Controller

- **Intel VROC SATA for HPE ProLiant Gen11**

**Notes:**

- All models feature an embedded storage controller, with embedded software SATA RAID support for up to 14 bays.
- Intel VROC for HPE ProLiant Gen11 is an enterprise, hybrid Software RAID solution specifically designed for SSDs.
- Intel VROC is a software-based solution utilizing Intel CPU to RAID or HBA direct connected drives.
- RAID Support- 0/1/5/10.
- Windows and Linux OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- iLO Support- IML, Alert, SNMP, AHS.
- iLO Redfish- Redfish Read.
- Intel VROC SATA for HPE ProLiant Gen11 will operate in UEFI mode only. For legacy support an additional storage controller will be needed.
- Intel VROC SATA is off by default and must be enabled.
- VROC cannot support mix among SATA/sSATA/tSATA due to VROC limitation. Visit [Intel Virtual RAID on CPU for HPE Gen11 User Guide](#).
  - 12LFF: Mix of raid is not allowed across boxes/drive bays. Each LFF drive cage (box1/2/3) has four bays and is separated with different drive group with Intel VROC SATA RAID configuration.
  - 8SFF: Mix of raid is not allowed across boxes/drive bays. One box contains 8 bays and is separated into two drive groups (Bay1-4 and Bay5-8) with Intel VROC SATA RAID configuration.

## Standard Features

- **Intel VROC NVMe for HPE ProLiant Gen11**

**Notes:**

- All models feature 4 x8 PCIe 5.0 connectors per socket for NVMe connectivity, provides support for up to 8 direct attach x4 NVMe bays.
- Only supported on SFF models.
- Intel VROC for HPE ProLiant Gen11 is an enterprise, hybrid Software RAID solution specifically designed for NVMe SSDs connected directly to the CPU. Intel VROC is a software-based solution utilizing Intel CPU to RAID or HBA direct connected drives.
- Intel Virtual RAID on CPU Standard for RAID 0/1/10 (S3Q19A/S3Q39AAE) or Premium SKU for RAID 0/1/5/10 (R7J57A/R7J59AAE) must be ordered to enable RAID support.
- Windows, Linux, VMware OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- Active health monitoring of NVMe M.2 drives requires use of SMART tools.
- Intel VROC NVMe for HPE ProLiant Gen11 will operate in UEFI mode only. For legacy support an additional Tri-Mode controller will be needed.
- For NVMe SSDs only, no PCIe card support.

### Essential RAID Controller

- HPE Smart Array E208e-p SR Gen10 Controller

### Tri-Mode Controller

- HPE MR416i-p Gen11 Controller
- HPE MR416i-o Gen11 Controller
- HPE MR216i-p Gen11 Controller
- HPE MR216i-o Gen11 Controller
- HPE MR408i-o Gen11 Controller
- HPE SR932i-p Gen11 Controller<sup>1,2</sup>

**Notes:**

- PE80xx NVMe drives are not supported.
  - <sup>1</sup>Requires x16 physical and electrical riser slot
  - <sup>2</sup>If second controller is required, must select secondary riser
  - Controllers with cache require either P02377-B21 HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit or P01366-B21 HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit.
-

## Standard Features

### Interfaces

Serial	Optional Rear
<b>Display Port</b>	1 optional front display port via Universal Media Bay
<b>VGA Port</b>	1 standard, rear for all chassis. 1 Optional front display port (Via Universal Media Bay) <b>Notes: Both ports are not active simultaneously.</b>
<b>Network Ports</b>	None standard. Choice of OCP networking card or stand-up networking card required. BTO models will come pre-selected with a primary networking card.
<b>HPE iLO Remote Management Network Port</b>	1 Gb Dedicated, rear
<b>Front iLO Service Port</b>	1 standard (Not available when System Insight Display Kit is ordered)
<b>USB 3.2 Port Gen1</b>	Up to 4 total: 1 front (3.2 Gen1), 2 rear (3.0), 2 internal (secure – 1 – 3.2 Gen1, 1 – 2.0), 1 optional USB 2.0 front via Universal Media Bay
<b>System Insight Display (SID)</b>	Optional <b>Notes: Not shipping as standard. Available as a CTO option or as a field upgrade (P48819-B21).</b>

### Operating Systems and Virtualization Software Support for HPE Servers

HPE servers are designed for seamless integration with partner Operating Systems and Virtualization Software. By collaborating closely with our partners, we ensure that their products are optimized, certified, and fully supported within your HPE server environment.

Access the certified and supported servers for each of the OS and Virtualization software: [HPE Servers Support & Certification](#)

### Matrices

### HPE Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen11 servers have a UEFI Class 3 implementation to support UEFI Mode.

**Notes:** The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <https://www.hpe.com/servers/uefi>.

### UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Embedded UEFI Shell
- Operating system specific functionality
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- Support for > 2.2 TB (using GPT) boot drives
- PXE boot support for IPv6 networks
- USB 3.0 Stack
- Workload Profiles for simple performance optimization

## Standard Features

### UEFI Boot Mode only

- TPM 2.0 Support  
**Notes:** Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature.
- iSCSI Software Initiator Support.
- NVMe Boot Support
- HTTP/HTTPs Boot support as a PXE alternative.
- Platform Trust Technology (PTT) can be enabled.
- Boot support for option cards that only support a UEFI option ROM

**Notes:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

---

### Industry Standard Compliance

- ACPI 6.4 Compliant
- PCIe 5.0 Compliant
- Wake on LAN (WoL) Support
- Microsoft® Logo certifications
- PXE Support
- VGA
- Display Port  
**Notes:** This support is on the optional Universal Media Bay.
- USB 3.2 Gen1 Compliant
- USB 2.0 Compliant (via Universal Media Bay)  
**Notes:** This support is on the optional Universal Media Bay.
- Energy Star
- SMBIOS 3.4
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- 2.0 Support  
**Notes:** Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature.
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4

**Notes:** For additional technical, thermal details regarding ambient temperature, humidity, and feature support, please visit [DL380 Gen11 Extended Ambient Temperature Guidelines](#)

- European Union Erp Lot 9 Regulation

#### **Notes:**

- Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.
  - HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.
  - Please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html> for more information regarding HPE Lot 9 conformance.
  - UEFI (Unified Extensible Firmware Interface Forum) 2.8
-

## Standard Features

### Embedded Management

#### HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <https://www.hpe.com/info/iLO>.

#### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

#### Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at [https://support.hpe.com/hpesc/public/docDisplay?docId=c04465280&docLocale=en\\_US](https://support.hpe.com/hpesc/public/docDisplay?docId=c04465280&docLocale=en_US)

#### iLO RESTful API

iLO RESTful API is DMTF Redfish API implementation and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <https://www.hpe.com/info/restfulapi>.

#### OpenBMC Support

OpenBMC Capable through iLO6 Transfer of Ownership Process.

Learn more at [OpenBMC Support](#)

#### Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <https://www.hpe.com/servers/ahs>.

#### Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP).

#### iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <https://www.hpe.com/servers/iLOamplifierpack>

#### RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <https://www.hpe.com/info/resttool>.

#### Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <https://www.hpe.com/servers/powershell>.

#### HPE OneView Standard

HPE OneView is an on premise, multi-generational server monitoring and management solution. HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. Customers can upgrade their management experience with an HPE OneView Advanced license all provided by the same tool. Learn more at

<https://www.hpe.com/info/oneview>.

## Standard Features

### HPE Compute Ops Management

HPE is intelligently transforming compute management with an intuitive cloud operating experience through HPE GreenLake cloud platform to streamline and secure operations from edge-to-cloud. Automated key lifecycle tasks, for onboarding, updating, managing, and monitoring HPE servers, brings agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface. Manage single locations or multiple, distributed sites. Keep tens to thousands of servers secure with batch policy controls and automated updates.

Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and fixes. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

A 3-year subscription to Compute Ops Management is added by default when ordering an HPE ProLiant Gen11 rack, tower, or micro server.

For more information, visit the Compute Ops Management QuickSpecs: <https://www.hpe.com/psnow/doc/a50004263enw>

---

### Security

- UEFI Secure Boot and Secure Start support
  - Tamper-free updates – components digitally signed and verified
  - Immutable Silicon Root of Trust
  - Ability to rollback firmware
  - FIPS 140-2 validation
  - Secure erase of NAND/User data
  - Configurable for PCI DSS compliance
  - TPM (Trusted Platform Module) 2.0 option
    - **Notes: Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature.**
  - Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
  - Bezel Locking Kit option
  - Support for Commercial National Security Algorithms (CNSA)
  - Chassis Intrusion detection option
  - Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
- 

### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Services operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**Notes:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available.

<https://www.hpe.com/support/ProLiantServers-Warranties>

---

## Optional Features

### Server Management

#### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

#### HPE OneView Advanced

HPE OneView Advanced offers a sophisticated level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It builds upon the base features of HPE OpenView Standard, provides full-featured licenses which can be purchased for managing multiple HPE server generations.

To learn more visit <https://www.hpe.com/info/oneview>.

#### HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <https://www.hpe.com/info/cmu>.

---

#### One Config Simple (OCS/SCE)

OCS/SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance.

<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

---

### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so you're critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

---



---

## Service and Support

### HPE Services

No matter where you are in your digital transformation journey, you can count on HPE Services to deliver the expertise you need when, where and how you need it. From planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.hpe.com/services>

---

### Consulting Services

No matter where you are in your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.hpe.com/services/consulting>

---

### HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](#)

---

### Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.hpe.com/services/operational>

---

### HPE Complete Care Service

HPE Complete Care Service is a modular, edge-to-cloud IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through a personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/complecare>

---

### HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Tech Care Service is available in three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

---



## Service and Support

### HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Lifecycle Install and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Analysis Service: Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- Implementation assistance services: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

**Notes:** To review the list of Lifecycle Services available for your product go to:

<https://www.hpe.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

---

### Other Related Services from HPE Services:

#### HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.hpe.com/services/training>

#### Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and services options.

#### Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

#### How to Purchase Services

Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.hpe.com/portal/site/ssc/>

---

## Service and Support

### AI Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.hpe.com/hpesc/public/home/signin>

---

### Consume IT On Your Terms

**HPE GreenLake** edge-to-cloud platform brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake edge-to-cloud platform accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

To learn more about HPE Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE"

<https://www.hpe.com/us/en/contact-hpe.html>

For more information

<https://www.hpe.com/services>

---



## Pre-Configured Models

### Pre-Configured models ship with the configurations below.

- Pre-Configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will not be shipped inside the server.
- Network Choice models do not include embedded LOM.

<b>SKU Number</b>	P52560-B21 P52560-291 P52560-421	P52561-B21 P52561-291 P52561-421	P52562-B21 P52562-291 P52562-421
<b>Model Name</b>	<b>P52560-B21 &amp; P52560-291:</b> HPE ProLiant DL380 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server	<b>P52561-B21 &amp; P52561-291:</b> HPE ProLiant DL380 Gen11 5416S 2.0GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server	<b>P52562-B21 &amp; P52562-291:</b> HPE ProLiant DL380 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R NC 12LFF 800W PS Server
	<b>P52560-421:</b> HPE ProLiant DL380 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS Server	<b>P52561-421:</b> HPE ProLiant DL380 Gen11 5416S 2.0GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS Server	<b>P52562-421:</b> HPE ProLiant DL380 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R NC 12LFF 1000W PS Server
<b>Chassis</b>	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 12LFF NC Configure-to-order Server
<b>Processor</b>	4410Y (12 core, 2.0 GHz, 150W)	5416S (16 core, 2.0 GHz, 150W)	4410Y (12 core, 2.0 GHz, 150W)
<b>Number of Processors</b>	One		
<b>Memory</b>	32 GB (1x32 GB, 4800 MT/s) <b>Notes:</b> Runs at 4000 MT/s due to processor limitation.	32 GB (1x32 GB, 4800 MT/s) <b>Notes:</b> Runs at 4400 MT/s due to processor limitation.	32 GB (1x32 GB, 4800 MT/s) <b>Notes:</b> Runs at 4000 MT/s due to processor limitation.
<b>Network Controller</b>	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE <b>Notes:</b> No embedded networking	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE <b>Notes:</b> No embedded networking	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE <b>Notes:</b> No embedded networking
<b>Storage Controller</b>	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	Embedded SATA controller (AHCI or Intel SATA software RAID controller)
<b>Included Hard Drives</b>	None ship standard, 8 SFF supported	None ship standard, 8 SFF supported	None ship standard, 12 LFF supported
<b>Optical Drive</b>	Optional DVD-ROM Optional via Universal Media Bay External support only	Optional DVD-ROM Optional via Universal Media Bay External support only	Not supported
<b>Expansion Slots</b>	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2 processor configuration		
<b>Power Supply</b>	<b>P52560-B21 &amp; P52560-291:</b> 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	<b>P52561-B21 &amp; P52561-291:</b> 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	<b>P52562-B21 &amp; P52562-291:</b> 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

## Pre-Configured Models

	<b>P52560-421:</b> 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	<b>P52561-421:</b> 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	<b>P52562-421:</b> 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit
<b>Fans</b>	4x Standard Fans		
<b>Management</b>	HPE iLO 6		
<b>Rail Kit</b>	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit		
<b>Security</b>	TPM (Trusted Platform Module)		
<b>Form Factor</b>	2U Rack		
<b>Warranty</b>	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.		



## Pre-Configured Models

<b>SKU Number</b>	P52564-B21 P52564-291 P52564-421	P58417-B21 P58417-291	P60636-B21 P60636-291 P60636-421
<b>Model Name</b>	<b>P52564-B21 &amp; P52564-291:</b> HPE ProLiant DL380 Gen11 5415+ 2.9GHz 8-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server	<b>P58417-B21:</b> HPE ProLiant DL380 Gen11 6430 2.1GHz 32-core 1P 64GB-R NC 8SFF 1000W PS Server	<b>P60636-B21 &amp; P60636-291:</b> HPE ProLiant DL380 Gen11 4416+ 2.0GHz 20-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server
	<b>P52564-421:</b> HPE ProLiant DL380 Gen11 5415+ 2.9GHz 8-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS Server	<b>P58417-291 &amp; P58417-421:</b> HPE ProLiant DL380 Gen11 6430 2.1GHz 32-core 1P 32GB-R NC 8SFF 1000W PS Server	<b>P60636-421:</b> HPE ProLiant DL380 Gen11 4416+ 2.0GHz 20-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS Server
<b>Chassis</b>	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server		
<b>Processor</b>	5415+ (8 core, 2.9 GHz, 150W)	6430 (32 core, 2.1 GHz, 270W)	4416+ (20 core, 2.0 GHz, 165W)
<b>Number of Processors</b>	One	One with high performance heatsink	One with high performance heatsink
<b>Memory</b>	32 GB (1x32 GB, 4800 MT/s) <b>Notes: Runs at 4400 MT/s due to processor limitation.</b>	<b>P58417-B21:</b> 64 GB (2x32 GB, 4800 MT/s) <b>Notes: Runs at 4400 MT/s due to processor limitation.</b>	32 GB (1x32 GB, 4800 MT/s) <b>Notes: Runs at 4000 MT/s due to processor limitation.</b>
		<b>P58417-291 &amp; P58417-421:</b> 32 GB (2x32 GB, 4800 MT/s) <b>Notes: Runs at 4400 MT/s due to processor limitation.</b>	
<b>Network Controller</b>	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE <b>Notes: No embedded networking</b>	Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE <b>Notes: No embedded networking</b>	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE <b>Notes: No embedded networking</b>
<b>Storage Controller</b>	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	Embedded SATA controller (AHCI or Intel SATA software RAID controller)	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
<b>Included Hard Drives</b>	None ship standard, 8 SFF supported		
<b>Optical Drive</b>	Optional DVD-ROM Optional via Universal Media Bay External support only		
<b>Expansion Slots</b>	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2 processor configuration		
<b>Power Supply</b>	<b>P52564-B21 &amp; P52564-291:</b> 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	<b>P60636-B21 &amp; P60636-291:</b> 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
	<b>P52564-421:</b> 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit		<b>P60636-421:</b> 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit

## Pre-Configured Models

<b>Fans</b>	4x Standard Fans	6x High Performance Fan	4x Standard Fans
<b>Management</b>	HPE iLO 6		
<b>Rail Kit</b>	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit		
<b>Security</b>	TPM (Trusted Platform Module)		
<b>Form Factor</b>	2U Rack		
<b>Warranty</b>	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.		



## Pre-Configured Models

<b>SKU Number</b>	P60637-B21 P60637-291 P60637-421	P60638-B21 P60638-291 P60638-421	P60740-AA1
<b>Model Name</b>	<b>P60637-B21 &amp; P60637-291:</b> HPE ProLiant DL380 Gen11 6426Y 2.5GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server  <b>P60637-421:</b> HPE ProLiant DL380 Gen11 6426Y 2.5GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS Server	<b>P60638-B21 &amp; P60638-291:</b> HPE ProLiant DL380 Gen11 5418Y 2.0GHz 24-core 1P 64GB-R MR408i-o NC 8SFF 800W PS Server  <b>P60638-421:</b> HPE ProLiant DL380 Gen11 5418Y 2.0GHz 24-core 1P 64GB-R MR408i-o NC 8SFF 1000W PS Server	HPE ProLiant DL380 Gen11 4416+ 2.1GHz 20-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server
<b>Chassis</b>	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server		
<b>Processor</b>	6426Y (16 core, 2.5 GHz, 185W)	5418Y (24 core, 2.0 GHz, 185W)	4416+ (20 core, 2.0 GHz, 165W)
<b>Number of Processors</b>	One with high performance heatsink		
<b>Memory</b>	32 GB (1x32 GB, 4800 MT/s)	64 GB (2x32 GB, 4800 MT/s) <b>Notes: Runs at 4400 MT/s due to processor limitation.</b>	32 GB (1x32 GB, 4800 MT/s) <b>Notes: Runs at 4000 MT/s due to processor limitation.</b>
<b>Network Controller</b>	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE <b>Notes: No embedded networking</b>	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE <b>Notes: No embedded networking</b>	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE <b>Notes: No embedded networking</b>
<b>Storage Controller</b>	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller		
<b>Included Hard Drives</b>	None ship standard, 8 SFF supported		
<b>Optical Drive</b>	Optional DVD-ROM Optional via Universal Media Bay External support only		
<b>Expansion Slots</b>	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2 processor configuration		
<b>Power Supply</b>	<b>P60637-B21 &amp; P60637-291:</b> 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  <b>P60637-421:</b> 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	<b>P60638-B21 &amp; P60638-291:</b> 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  <b>P60638-421:</b> 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
<b>Fans</b>	4x Standard Fans		
<b>Management</b>	HPE iLO 6		
<b>Rail Kit</b>	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit		
<b>Security</b>	TPM (Trusted Platform Module)	TPM (Trusted Platform Module)	TPM (Trusted Platform Module)

## Pre-Configured Models

<b>Form Factor</b>	2U Rack
<b>Warranty</b>	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.



## Pre-Configured Models

SKU Number	P70456-291 P70456-421	P70457-291 P70457-421	P70458-421
Model Name	<p><b>P70456-291:</b> HPE ProLiant DL380 Gen11 4509Y 2.6GHz 8-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS JP Server</p> <p><b>P70456-421:</b> HPE ProLiant DL380 Gen11 4509Y 2.6GHz 8-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS EMEA Server</p>	<p><b>P70457-291:</b> HPE ProLiant DL380 Gen11 4514Y 2.0GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS JP Server</p> <p><b>P70457-421:</b> HPE ProLiant DL380 Gen11 4514Y 2.0GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS EMEA Server</p>	HPE ProLiant DL380 Gen11 4514Y 2.0GHz 16-core 1P 32GB-R MR416i-p NC 12LFF 1000W PS EMEA Server
Chassis	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 12LFF NC Configure-to-order Server
Processor	4509Y (8 core, 2.6 GHz, 125W)	4514Y (16 core, 2.0 GHz, 150W)	4514Y (16 core, 2.0 GHz, 150W)
Number of Processors	One		
Memory	32 GB (1x32 GB, 5600 MT/s) <b>Notes:</b> Runs at 4400 MT/s due to processor limitation.		
Network Controller	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE <b>Notes:</b> No embedded networking	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE <b>Notes:</b> No embedded networking	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE <b>Notes:</b> No embedded networking
Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller
Included Hard Drives	None ship standard, 8 SFF supported	None ship standard, 8 SFF supported	None ship standard, 12 LFF supported
Optical Drive	Optional DVD-ROM Optional via Universal Media Bay External support only		
Expansion Slots	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2 processor configuration		
Power Supply	1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit		
Fans	4x Standard Fans		
Management	HPE iLO 6		
Rail Kit	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit		
Security	TPM (Trusted Platform Module)		
Form Factor	2U Rack		
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.		

## Pre-Configured Models

<b>SKU Number</b>	P70579-D61	P70580-D61
<b>Model Name</b>	HPE ProLiant DL380 Gen11 6430 2.1GHz 32-core 1P 32GB-R NC 8SFF 800W PS Server	HPE ProLiant DL380 Gen11 6442Y 2.6GHz 24-core 1P 32GB-R NC 8SFF 800W PS Server
<b>Chassis</b>	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	
<b>Processor</b>	6430 (32 core, 2.1 GHz, 270W)	6442Y (24 core, 2.6 GHz, 225W)
<b>Number of Processors</b>	One with high performance heatsink	
<b>Memory</b>	32 GB (1x32 GB, 4800 MT/s) <b>Notes:</b> Runs at 4400 MT/s due to processor limitation.	32 GB (1x32 GB, 4800 MT/s)
<b>Network Controller</b>	Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE <b>Notes:</b> No embedded networking	
<b>Storage Controller</b>	Embedded SATA controller (AHCI or Intel SATA software RAID controller)	
<b>Included Hard Drives</b>	None ship standard, 8 SFF supported	
<b>Optical Drive</b>	Optional DVD-ROM Optional via Universal Media Bay External support only	
<b>Expansion Slots</b>	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2 processor configuration	
<b>Power Supply</b>	2x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	
<b>Fans</b>	6x High Performance Fan	
<b>Management</b>	HPE iLO 6	
<b>Rail Kit</b>	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit	
<b>Security</b>	TPM (Trusted Platform Module)	
<b>Form Factor</b>	2U Rack	
<b>Warranty</b>	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.	

---

## Pre-Configured Models

### Country Code Key

- -B21 = Worldwide
- -291 = Japan
- -421 = Europe, the Middle East and Africa
- -AA1 = China
- -D61 = India

### HPE Smart Choice purchase program

The HPE Smart Choice purchase program features popular fully configured products that can be quoted in minutes and shipped quickly through HPE Authorized Partners. Products are configured and tested in an HPE factory and stocked at HPE Authorized Distributors and Partners. The products arrive in a single box, making onsite integration easier and more efficient for partners and customers. Additionally, there are aggressively priced HPE Tech Care Services available only through the HPE Smart Choice program when you purchase an HPE Smart Choice product.

For additional information on the HPE Smart Choice purchase program, please visit:

<https://www.hpe.com/psnow/doc/a50009219enw>

---

## Configuration Information

### Smart Templates from HPE

HPE is releasing new Smart Template technology in the One Config Advanced (OCA) configurator. These Templates represent the CTO equivalents of the top-selling BTO configurations. They are intended to provide simple starting points to assist you in easily creating and customizing your desired Server solutions. HPE Servers that have Platform Templates, developed by HPE Product Managers, will have a separate tab in the HPE OCA configurator.

### Workload Solutions Templates from HPE

The Workload Solutions Templates build on the Smart Templates technology to easily develop working configurations of the most compelling Workload Solutions. The templates complement the Reference Builds developed by HPE. Workload Solutions templates preconfigure some of the key architecture decisions and make it easier for Sellers to get started and complete a differentiated server solution for your customer's specific workload.

### Mainstream SKUs

HPE launched the Mainstream SKU initiative as a market-driven approach to Demand Steering. It is a simplified portfolio of our top selling options that meet the current and future market trends. HPE has committed to provide a more predictable and faster experience for these options. Mainstream SKUs enjoy higher safety stock levels and have higher fulfillment service levels than non-Mainstream SKUs. Mainstream orders are fulfilled +30% faster than non-Mainstream orders, have fewer shortages and better recovery dates. This platform has Mainstream SKUs in the options portfolio, and is eligible for the improved Mainstream experience. Mainstream SKUs are designated with a Mainstream symbol in our configurators.

### Mainstream Configurations

HPE is using the new Smart Templates technology to present Mainstream configurations. All the options in a Mainstream configuration are pre-selected Mainstream SKUs to optimize the performance, predictability and fulfillment experience. Check the Template section in our configurators for eligible Mainstream configurations.

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

### Step 1: Base Configuration (choose one (1) of the following four (4) configurable server models from the tables below)

The below (4) CTO server models, denoted with "NC" in the SKU description, provide flexibility in the networking choice and require a network adapter from the "HPE Networking" section be selected.

<b>Networking Choice CTO Server Models</b>	HPE ProLiant DL380 Gen11 8LFF NC CTO Server	HPE ProLiant DL380 Gen11 12LFF NC CTO Server	HPE ProLiant DL380 Gen11 8SFF NC CTO Server	HPE ProLiant DL380 Gen11 24SFF NC CTO Server
<b>SKU Number</b>	P52532-B21	P52533-B21	P52534-B21	P52535-B21
<b>TAA SKU*</b>	P52532-B21#GTA	P52533-B21#GTA	P52534-B21#GTA	P52535-B21#GTA
<b>HPE Trusted Supply Chain</b>	P36394-B21 – Optional			
<b>Processor</b>	Not included as standard	Not included as standard	Not included as standard	Not included as standard
<b>DIMM Slots</b>	32-DIMM slots	32-DIMM slots	32-DIMM slots	32-DIMM slots
<b>Storage Controller</b>	Embedded SW RAID with 14 SATA ports (12-ports accessible), optional choice of HPE modular MegaRAID controller.			
<b>PCIe</b>	Three standard in primary riser			
<b>Drive Cage - available</b>	8LFF	12LFF	8 SFF (8SFF U.3 x1)	24SFF (3x 8SFF U.3 x1)

## Configuration Information

<b>Network Controller</b>	Choice of either OCP 3.0 or select stand-up network adapters for primary networking selection plus additional/optional stand-up network adapters. <b>Notes: No embedded networking</b>			
<b>Fans</b>	4-Standard	4-Standard	4-Standard	6-High Performance
<b>Management</b>	HPE iLO with Intelligent Provisioning (standard), iLO Advanced and OneView (optional)			
<b>USB</b>	4x 3.0 standard plus iLO front service port	4x 3.0 standard plus iLO front service port	4x 3.0 standard plus iLO front service port	4x 3.0 standard plus iLO front service port
<b>Networking Choice CTO Server Models</b>	HPE ProLiant DL380 Gen11 12EDSFF NC Configure-to-order Server			
<b>SKU Number</b>	P52536-B21			
<b>TAA SKU*</b>	P52536-B21#GTA			
<b>HPE Trusted Supply Chain</b>	P36394-B21 – Optional			
<b>Processor</b>	Not included as standard			
<b>DIMM Slots</b>	32-DIMM slots			
<b>Storage Controller</b>	Embedded SW RAID with 14 SATA ports (12-ports accessible), and optional choice of HPE modular MegaRAID controller.			
<b>PCIe</b>	Three standard in primary riser			
<b>Drive Cage - available</b>	12 EDSFF			
<b>Network Controller</b>	Choice of either OCP 3.0 or select stand-up network adapters for primary networking selection plus additional/optional stand-up network adapters <b>Notes: No embedded networking</b>			
<b>Fans</b>	6 -Standard			
<b>Management</b>	HPE iLO with Intelligent Provisioning (standard), iLO Advanced and OneView (optional)			
<b>USB</b>	4x 3.0 standard plus iLO front service port			

### Notes:

- Network Choice (NC) server models require a networking selection of a network adapters in the “HPE Networking” section.
- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries needing enhanced security and compliance needs. Applying this option to a DL380 Gen11 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL380 Gen11 is re-branded as a HPE ProLiant DL380T Gen11 to denote the HPE Trusted Supply Chain security enhancements. The DL380T is Trade Agreement Act (TAA) compliant. See “HPE Security” section within this document for more detail and learn more at <https://www.hpe.com/security>
- \*HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).
- All CTO servers are Energy Star 3.0 compliant.

## Configuration Information

CTO Server	8 SFF CTO Chassis	24SFF CTO Chassis	8LFF CTO Chassis	12LFF CTO Chassis
<b>Available Drive Cage</b>	8SFF U.3 x1 Drive Cage	3x 8SFF U.3 x1 Drive Cage	8LFF (2x 4LFF Drive Cages)	12LFF (3x 4LFF Drive Cages)
<b>Universal Media Bay</b>	1 Optional	Not available	Not available	Not available
<b>Optical Disk Drive</b>	1 Optional with UMB	Not available	1 Optional with ODD Enable Kit	Not available
<b>8 SFF NVMe/SAS/SATA Drive Cage (mid-tray)</b>	1 Optional	1 Optional	1 Optional	1 Optional
<b>2 SFF NVMe/SAS/SATA (Front)</b>	1 Optional with UMB	Not available	1 Optional with Side-by-Side Drive Cage	Not available
<b>2 SFF NVMe/SAS/SATA (Rear)</b>	3 Optional	3 Optional	1 Optional	1 Optional
<b>2LFF SAS/SATA (Rear riser)</b>	Not available	Not available	2 Optional	2 Optional
<b>CTO Server</b>	<b>EDSFF CTO Chassis</b>			
<b>Available Drive Cage</b>	12 EDSFF Drive Cage			
<b>Universal Media Bay</b>	Not supported			
<b>Optical Disk Drive</b>	Not supported			
<b>8 SFF NVMe/SAS/SATA Drive Cage</b>	Up to 1 Optional			
<b>2 SFF NVMe/SAS/SATA (Front)</b>	Not supported			
<b>2 SFF NVMe/SAS/SATA (Rear)</b>	1 Optional			
<b>2LFF SAS/SATA (Rear riser)</b>	Not available			

**Notes:** This applies to CTO configurations; field upgrades may differ depending on field configuration.

### Step 2: Choose Required Options

Please select up to two processors required below.

**Notes:**

- 8SFF, 8LFF, and 12LFF CTO models ship with 4 standard fans.
- 24SFF CTO Servers ship with 6 High performance fans included. Maximum Performance fan kit is available to meet ambient temperature environments and are required for rear drives or NVMe configurations.
- Maximum memory capacity per processor is dependent on processor models. All processors support up to 4TB max memory per processor.
- Mixing of 2 different processor models are NOT allowed.
- Processors with TDP greater than 150W require High Performance Heatsink (P48818-B21).
- Q series processors require Max Performance Heat Sink (P48817-B21)
- DDR5 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

## Configuration Information

### Step 2a: Choose Processors

#### Processor Option Kits (Required Processor)

#### 5<sup>th</sup> Generation Intel Xeon-Platinum

All SKUs below ship with processors only. Adequate fans and heatsinks must be selected. Supports “HPE DDR5 Smart Memory – Registered (RDIMM), 5600MT/s”.

Intel Xeon-Platinum 8593Q 2.2GHz 64-core 385W Processor for HPE

P68449-B21

#### Notes:

- XCC die
- Max 2
- Qty 2 of processor must be selected.
- Max Performance Heat Sink or DLC Module must be selected
- High Performance Fan Kit must be selected and defaulted
- Max Performance Heat Sink is defaulted however customer is allowed to deselect and select DLC Module.
- Without DLC Module, drives above 11W cannot be populated in Rear Drive cages
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8592+ 1.9GHz 64-core 350W Processor for HPE

P67089-B21

#### Notes:

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected and defaulted
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8592V 2.0GHz 64-core 330W Processor for HPE

P67107-B21

#### Notes:

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected and defaulted
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8581V 2.0GHz 60-core 270W Processor for HPE

P67109-B21

#### Notes:

- XCC die
- Max 1
- High Performance Heat Sink must be selected.
- DLC Module cannot be selected.
- High Performance Fan Kit must be selected
- Cannot be selected with EDSFF CTO Server.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8580 2.0GHz 60-core 350W Processor for HPE

P67088-B21

#### Notes:

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

## Configuration Information

Intel Xeon-Platinum 8570 2.1GHz 56-core 350W Processor for HPE

P67087-B21

**Notes:**

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8568Y+ 2.3GHz 48-core 350W Processor for HPE

P67086-B21

**Notes:**

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8562Y+ 2.8GHz 32-core 300W Processor for HPE

P67085-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8558P 2.7GHz 48-core 350W Processor for HPE

P67108-B21

**Notes:**

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8558 2.1GHz 48-core 330W Processor for HPE

P67097-B21

**Notes:**

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Platinum 8558U 2.0GHz 48-core 300W Processor for HPE

P67102-B21

**Notes:**

- XCC die
- Max 1
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Single socket processor and DLC Module cannot be selected together.
- Cannot be selected with EDSFF CTO Server.
- Supports only PC5-5600B/ PC5-5200B Memory.

## Configuration Information

Intel Xeon-Gold 6558Q 3.2GHz 32-core 350W Processor for HPE

P67098-B21

**Notes:**

- MCC die
- Qty 2 of processor must be selected.
- Max Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.

Intel Xeon-Gold 6554S 2.2GHz 36-core 270W Processor for HPE

P67110-B21

**Notes:**

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6548N 2.8GHz 32-core 250W Processor for HPE

P67105-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6548Y+ 2.5GHz 32-core 250W Processor for HPE

P67082-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6544Y 3.6GHz 16-core 270W Processor for HPE

P67084-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6542Y 2.9GHz 24-core 250W Processor for HPE

P67081-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

## Configuration Information

Intel Xeon-Gold 6538N 2.1GHz 32-core 205W Processor for HPE

P67104-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6538Y+ 2.2GHz 32-core 225W Processor for HPE

P67096-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6534 3.9GHz 8-core 195W Processor for HPE

P67083-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6530 2.1GHz 32-core 270W Processor for HPE

P67095-B21

**Notes:**

- XCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 6526Y 2.8GHz 16-core 195W Processor for HPE

P67080-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Gold 5520+ 2.2GHz 28-core 205W Processor for HPE

P67094-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

## Configuration Information

Intel Xeon-Gold 5515+ 3.2GHz 8-core 165W Processor for HPE

P67079-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Silver 4516Y+ 2.2GHz 24-core 185W Processor for HPE

P67093-B21

**Notes:**

- MCC die
- Max 2
- High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Silver 4514Y 2.0GHz 16-core 150W Processor for HPE

P67092-B21

**Notes:**

- MCC die
- Max 2
- Standard Heat Sink or High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel Xeon-Silver 4510 2.4GHz 12-core 150W Processor for HPE

P67091-B21

**Notes:**

- EE LCC die
- Max 2
- Standard Heat Sink or High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.
- 96GB 5600B Memory cannot be selected.

Intel Xeon-Silver 4509Y 2.6GHz 8-core 125W Processor for HPE

P67090-B21

**Notes:**

- EE LCC die
- Max 2
- Standard Heat Sink or High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.
- If “HPE Energy Star4.0 configuration FIO kit” is selected then Qty2 of this Processor cannot be selected.
- 96GB 5600B Memory cannot be selected.

## Configuration Information

Intel Xeon-Bronze 3508U 2.1GHz 8-core 125W Processor for HPE P67100-B21

**Notes:** 18, 282, 283, 284, 285, 288, 309, 319, 320, 322, 323, 430, 436, 499, 500, 501, 510

- EE LCC die
- Max 1
- Standard Heat Sink or High Performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High Performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.
- If "HPE Energy Star4.0 configuration FIO kit" is selected then Qty2 of this Processor cannot be selected.
- 96GB 5600B Memory cannot be selected.
- Supports PCIe4.0 Only29, 30, 31, 32, 34, 259, 445, 449, 458, 475, 499

### 4<sup>th</sup> Generation Intel Xeon-Platinum

**Notes:**

- All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.
- Processors with TDP equal to or greater than 150W require High Performance Heatsink (P48818-B21)
- Q series processors require Max Performance Heat Sink (P48817-B21)
- 8470Q processor is not supported with 12LFF CTO Server and 24SFF CTO Server.

Intel Xeon-Platinum 9462 2.7GHz 32-core 350W Processor for HPE P49645-B21

**Notes:**

- This is Intel High Bandwidth Memory (HBM) CPU.
- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8490H 1.9GHz 60-core 350W Processor for HPE P49630-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8480+ 2.0GHz 56-core 350W Processor for HPE P49607-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8470Q 2.1GHz 52-core 350W Processor for HPE P49609-B21

**Notes:**

- Requires selection of Max Performance Heat Sink or DLC Module
- Requires High Performance Fan Kit
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.

Intel Xeon-Platinum 8470 2.0GHz 52-core 350W Processor for HPE P49606-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8470N 1.7GHz 52-core 300W Processor for HPE P49649-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

## Configuration Information

Intel Xeon-Platinum 8468V 2.4GHz 48-core 330W Processor for HPE P49631-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8468 2.1GHz 48-core 350W Processor for HPE P49605-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8462Y+ 2.8GHz 32-core 300W Processor for HPE P49603-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8458P 2.7GHz 44-core 350W Processor for HPE P49632-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8460Y+ 2.0GHz 40-core 300W Processor for HPE P49604-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8452Y 2.0GHz 36-core 300W Processor for HPE P49616-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Platinum 8444H 2.9GHz 16-core 270W Processor for HPE P49625-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

**4<sup>th</sup> Generation Intel Xeon-Gold**

Intel Xeon-Gold 6458Q 3.1GHz 32-core 350W Processor for HPE P49608-B21

**Notes:**

- Requires selection of Max Performance Heat Sink or DLC Module
- Requires High Performance Fan Kit
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.

Intel Xeon-Gold 6448H 2.4GHz 32-core 250W Processor for HPE P49622-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Gold 6448Y 2.1GHz 32-core 225W Processor for HPE P49600-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Gold 6444Y 3.6GHz 16-core 270W Processor for HPE P49602-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

## Configuration Information

Intel Xeon-Gold 6442Y 2.6GHz 24-core 225W Processor for HPE	P49599-B21
<b>Notes:</b>	
– Requires High Performance Heat Sink	
– Requires High Performance Fan Kit	
Intel Xeon-Gold 6438N 2.0GHz 32-core 205W Processor for HPE	P49638-B21
<b>Notes:</b>	
– Requires High Performance Heat Sink	
– Requires High Performance Fan Kit	
Intel Xeon-Gold 6438Y+ 2.0GHz 32-core 205W Processor for HPE	P49615-B21
<b>Notes:</b>	
– Requires High Performance Heat Sink	
– Requires High Performance Fan Kit	
Intel Xeon-Gold 6434 3.7GHz 8-core 195W Processor for HPE	P49601-B21
<b>Notes:</b> Requires High Performance Heat Sink	
Intel Xeon-Gold 6430 2.1GHz 32-core 270W Processor for HPE	P49614-B21
<b>Notes:</b>	
– Requires High Performance Heat Sink	
– Requires High Performance Fan Kit	
Intel Xeon-Gold 6426Y 2.5GHz 16-core 185W Processor for HPE	P49598-B21
<b>Notes:</b> Requires High Performance Heat Sink	
Intel Xeon-Gold 6454S 2.2GHz 32-core 270W Processor for HPE	P49654-B21
<b>Notes:</b>	
– Requires High Performance Heat Sink	
– Requires High Performance Fan Kit	
Intel Xeon-Gold 6421N 1.8GHz 32-core 185W Processor for HPE	P49641-B21
<b>Notes:</b> Requires High Performance Heat Sink	
Intel Xeon-Gold 6418H 2.1GHz 24-core 185W Processor for HPE	P49621-B21
<b>Notes:</b> Requires High Performance Heat Sink	
Intel Xeon-Gold 6416H 2.2GHz 18-core 165W Processor for HPE	P49620-B21
<b>Notes:</b> Requires High Performance Heat Sink	
Intel Xeon-Gold 6414U 2.0GHz 32-core 250W Processor for HPE	P49619-B21
<b>Notes:</b>	
– This is a single socket CPU, max allowed = 1	
– Requires High Performance Heat Sink	
– Requires High Performance Fan Kit	
Intel Xeon-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE	P49597-B21
<b>Notes:</b> Requires Standard Heat Sink	
Intel Xeon-Gold 5416S 2.0GHz 16-core 150W Processor for HPE	P49653-B21
<b>Notes:</b> Requires Standard Heat Sink	
Intel Xeon-Gold 5418N 1.8GHz 24-core 165W Processor for HPE	P49640-B21
<b>Notes:</b> Requires High Performance Heat Sink	
Intel Xeon-Gold 5418Y 2.0GHz 24-core 185W Processor for HPE	P49612-B21
<b>Notes:</b> Requires High Performance Heat Sink	

## Configuration Information

Intel Xeon-Gold 5420+ 2.0GHz 28-core 205W Processor for HPE P49613-B21

**Notes:**

- Requires High Performance Heat Sink
- Requires High Performance Fan Kit

Intel Xeon-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE P49597-B21

**Notes:**

- Requires Standard Heat Sink
- 4th Generation Intel Xeon-Silver

Intel Xeon-Gold 5411N 1.9GHz 24-core 165W Processor for HPE P49639-B21

**Notes:** Requires High Performance Heat Sink

Intel Xeon-Silver 4410Y 2.0GHz 12-core 150W Processor for HPE P49610-B21

**Notes:** Requires Standard Heatsink

Intel Xeon-Silver 4416+ 2.0GHz 20-core 165W Processor for HPE P49611-B21

**Notes:**

- Requires Standard Heatsink
- 4th Generation Intel Xeon-Bronze

Intel Xeon-Bronze 3408U 1.8GHz 8-core 125W Processor for HPE P49617-B21

**Notes:** Requires Standard Heatsink

### Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen11 memory population rule whitepaper and optimal memory performance guidelines, please go to:

**HPE Memory Population Rules**

For details on the HPE Server Memory Options Population Rules, please go to:

**Memory population rules for HPE Gen11 servers with 4th Generation Intel Scalable Processors**

**Notes:**

- HPE Server Memory compatibility for a specific server platform may vary or be limited within a server platform depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for an HPE server model or family and yet occasionally not be supported with some configurations within that server family
- Memory should be installed in even quantity of DIMMs
- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- DDR5-4800 Memory Kits are only supported with 4th Generation Intel Xeon Scalable Series Processors.
- Memory compatibility may vary or be limited within a specific server family depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for a server model or family and yet occasionally not be supported with limited configurations within that server family.
- Please consult with the HPE server QuickSpecs or your HPE representative if you have any questions regarding memory compatibility with a specific HPE server configuration.

### Registered DIMMs DDR5 (RDIMMs)

HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P43322-B21

HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P43328-B21

HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P43331-B21

HPE 96GB (1x96GB) Dual Rank x4 DDR5-4800 CAS-46-45-45 EC8 Registered Smart Memory Kit P66675-B21

**Notes:** 96GB DIMMs supported only on XCC and MCC CPUs.

## Configuration Information

HPE 128GB (1x128GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P69976-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43334-B21
HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43337-B21

### Notes:

- 4800 MT/s memory SKUs offer a transfer rate of 4800 MT/s at 1 DIMM per channel and 4400 MT/s at 2 DIMMs per channel
- Mixing of 3DS memory and non-3DS memory is not supported
- Mixing of x4 and x8 memory is not allowed
- Memory with larger than 128GB capacity will need High Performance Fan Kit (P48820-B21) and ambient limitation. 256GB DIMM will also need to limit the maximum front-end cage to two.
- If 96GB or higher density memory is selected then High Performance Fan Kit must be selected.
- 96GB memory cannot be mixed with any other memory.
- 96GB memory configuration must be either 8 or 16 only on 1 processor unit.
- 96GB memory configuration must be either 16 or 32 only on 2 processor unit.

### Memory Blank Kit

HPE DDR4 DIMM Blank Kit	P07818-B21
-------------------------	------------

**Notes:** DIMM Blanks are optional and not required.

## Step 2c: Choose Power Supplies

Select one or two power supplies from below.

**Notes:** Mixing of 2 different power supplies is NOT allowed.

### HPE Flex Slot Power Supplies

HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit	P44712-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38997-B21
HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit	P17023-B21
HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	P03178-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38995-B21

### Notes:

- Select a minimum (1), maximum (2) power supplies.
- 1600W Power supplies only support high line voltage (200VAC to 240VAC).
- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <https://www.hpe.com/info/hppoweradvisor>.
- All power supplies in a server should match.
- Mixing Power Supplies is not supported.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.
- Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output.
- HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements. HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

## Configuration Information

### Step 3: Choose Additional Factory Integrable Options

One of the following from each list may be selected if desired at time of factory integration

#### HPE Security Options

HPE iLO Common Password FIO Setting P08040-B21

##### Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

HPE Bezel Lock Kit 875519-B21

**Notes:** This option can be selected only if HPE Gen11 2U Bezel Kit (P50400-B21) is selected.

HPE ProLiant DL3XX Gen11 Intrusion Cable Kit P48922-B21

**Notes:** This option must be selected if HPE Trusted Supply Chain SKU (P36394-B21) is selected.

HPE Gen11 2U Bezel Kit P50400-B21

#### Factory Instructions and Server Settings

HPE ProLiant DL380 Gen11 8NVMe 1P FIO Bundle Kit P69548-B21

##### Notes:

- This bundle provides Direct Attach to 8NVMe Drives through First/ Single Processor
- If NVMe bundle is selected then defaulted Controller has to be deselected.
- If this NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit must be selected and defaulted.
- If this NVMe Bundle/ EDSFF Bundle is selected then Qty 1 of High Performance Fan Kit must be selected and defaulted.
- If 8NVMe Bundle is selected then Qty 1 (min/max) of 8SFF U.3 x4 cage OR 8SFF U.2 x4 cage must be selected.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 8SFF U.3 x1 Cage is selected along with 8 OR 16 NVMe bundle then controller must be selected except SR308i-o/SR308i-p.
- If 8NVMe 1P Bundle is selected then Primary 3 x16 Cable Kit cannot be selected and vice-versa.

HPE ProLiant DL380 Gen11 36EDSFF FIO Bundle Kit P56075-B21

HPE ProLiant DL380 Gen11 20EDSFF FIO Bundle Kit P56076-B21

##### Notes:

- If this NVMe Bundle/ EDSFF Bundle is selected then Qty 1 of High Performance Fan Kit must be selected.
- If NVMe Bundle/ EDSFF Bundle is selected then Second Processor must be selected.
- For 12EDSFF CTO Server, If EDSFF Bundle is selected then Max Quantity of 256GB Memory is limited to 16.
- EDSFF Drive cage supports Direct attach Only and requires selection of EDSFF Bundle.
- If EDSFF Bundle is selected then Qty1 of HPE DL380 Gen11 12EDSFF CPU1/2 Cable Kit must be selected
- If EDSFF Bundle is selected then Qty2 of HPE DL380/DL560 G11 2U 12EDSFF NVMe Kit must be selected.
- EDSFF Bundle is supported with 12EDSFF CTO Server Only.
- If EDSFF Bundle is selected then OCP1 x16 Enablement Kit AND OCP2 x16 Enablement Kit AND CPU1 OCP2 x8 Enable kit cannot be selected.
- If EDSFF Bundle is selected then Tertiary Riser cannot be selected.
- If EDSFF Bundle is selected then HPE DL380 Gen11 x16/x16/x16 Prim Cable Kit AND HPE DL380 Gen11 x16/x16/x16 Sec Cable Kit cannot be selected.
- If 20EDSFF Bundle is selected then Maximum 20 EDSFF Drives only can be selected.

## Configuration Information

HPE ProLiant DL380 Gen11 32NVMe Balanced FIO Bundle Kit

P53639-B21

### Notes:

- If NVMe bundle is selected then default storage controller cannot be selected.
- If this NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit must be selected.
- If this NVMe Bundle/ EDSFF Bundle is selected then Qty 1 of High Performance Fan Kit must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 3 (min/max) of 8SFF U.3 x4 cage must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 3x16 Primary riser must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 3x16 SEC Riser must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of OCP1 x16 Enablement Kit must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of OCP2 x16 Enablement Kit must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit must be selected.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If NVMe Bundle/ EDSFF Bundle is selected, then Second Processor must be selected.
- If 24NVMe/ 32NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- For 8SFF CTO Server, 8SFF U.3 x4 Mid Tray requires selection of 32NVMe Bundle or SR932i controller.
- If 32NVMe Bundle is selected, then Qty 1 (min/max) of HPE DL380 G11 2U 8SFF x4 U.3 Mid TM Kit must be selected.
- If 32NVMe Bundle is selected, then Qty 4 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter must be selected.

HPE ProLiant DL380 Gen11 8NVMe Balanced FIO Bundle Kit

P53633-B21

### Notes:

- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 8NVMe Bundle is selected, then Qty 1 (min) of 8SFF U.3 x4 drive must be selected.
- If NVMe Bundle is selected, then 8SFF U.3 x4 Cage is defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 8SFF U.3 x1 Cage is selected along with 8 OR 16 NVMe bundle, then controller must be selected.

HPE ProLiant DL380 Gen11 16NVMe Balanced FIO Bundle Kit

P53634-B21

### Notes:

- If NVMe bundle is selected, then defaulted Controller has to be deselected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 16NVMe Bundle is selected, then Qty 2 (min) of 8SFF U.3 x4 drive cage must be selected.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.

## Configuration Information

- If Tertiary Riser is selected along with 16NVMe Bundle, then 2x16 Tertiary FIO x8 Enable Kit (P53632-B21) must be selected
- If 8SFF U.3 x1 drive cage (P48813-B21) is selected along with 8 OR 16 NVMe bundle, then controller must be selected.

HPE ProLiant DL380 Gen11 24NVME Balanced I/O FIO Bundle Kit

P53635-B21

### Notes:

- If NVMe bundle is selected, then defaulted Controller has to be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drives must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Secondary Riser (P51083-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP1 x16 Enablement Kit (P48827-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP2 x16 Enablement Kit (P48828-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 2 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 24NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- If 24NVMe Balanced or 24NVMe DIFF IO-3 Bundle is selected, then CPU1 OCP2 x8 enablement OR CPU2 OCP2 x8 enablement kit cannot be selected.
- If 24NVMe Bundle is selected, then Primary 3 x16 Cable OR Secondary 3 x16 Cable cannot be selected.

HPE ProLiant DL380 Gen11 24NVME Differential I/O OCP1/2 x8 FIO Bundle Kit

P53636-B21

### Notes:

- If NVMe bundle is selected, then defaulted Controller has to be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drive cage must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 x8x16x8 Secondary Riser (P48802-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL300 Gen11 CPU1 OCP2 x8 Enable kit (P51911-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.

## Configuration Information

- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit (P54874-B21) must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If Tertiary Riser is selected along with 16NVMe Bundle then 2x16 Tertiary FIO x8 Enable Kit (P53632-B21) must be selected
- If 24NVMe Diff IO-1 bundle is selected, then OCP1 x16 enablement Kit and OCP2 x16 enablement kit and CPU2 OCP2 x8 enablement Kit cannot be selected.
- If 24NVMe Bundle is selected then primary 3 x16 Cable OR Sec 3 x16 Cable cannot be selected.

HPE ProLiant DL380 Gen11 24NVME Differential I/O OCP1 x16 FIO Bundle Kit

P53637-B21

### Notes:

- If NVMe bundle is selected, then defaulted Controller has to be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High-Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drive cage must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 x8x16x8 Secondary Riser (P48802-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP1 x16 Enablement Kit (P48827-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit (P54874-B21) must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 24NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- If 24NVMe Diff IO-2 bundle is selected, then OCP2 x16 enablement kit and CPU2 OCP2 enablement Kit OR CPU1 OCP2 x8 enablement Kit OR OCP2 x16 enablement cannot be selected.
- If 24NVMe Bundle is selected, then primary 3 x16 Cable OR Sec 3 x16 Cable cannot be selected.

HPE ProLiant DL380 Gen11 24NVME Differential I/O OCP1/2 x16 FIO Bundle Kit

P53638-B21

### Notes:

- If NVMe bundle is selected, then defaulted Controller has to be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drive cage must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.

## Configuration Information

- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 x8x16x8 Secondary Riser (P51083-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP1 x16 Enablement Kit (P48827-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP2 x16 Enablement Kit (P48828-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 2 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit (P54874-B21) must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 24NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- If 24NVMe Balanced or 24NVMe DIFF IO-3 Bundle is selected, then CPU1 OCP2 x8 enablement OR CPU2 OCP2 x8 enablement kit cannot be selected
- If 24NVMe Bundle is selected, then primary 3 x16 Cable OR Sec 3 x16 Cable cannot be selected.

HPE iLO Common Password FIO Setting

P08040-B21

**Notes:** Sets common iLO password, instead of randomly generated password for each server during Factory Diagnostics.

HPE ProLiant Platform Certificate and IDevID iLO FIO Setting

P42104-B21

### Notes:

- Initial Device Identity (IDevID) certificates are part of a Zero Trust Architecture. This SKU instructs factory to provision IDevID on HPE iLO.
- Directs HPE manufacturing site to create, digitally sign and store a platform certificate on the server.
- Requires HPE Trusted Platform Module (TPM).

### HPE Converged Infrastructure Management Software

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU

P8B26AAE

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU

E5Y35AAE

### vSAN ReadyNode

- 3, 6, 8 or 16 node vSAN Clusters (3 node minimum)
- HW is optimized for vSAN
- VMware vSAN Advanced LTU bundled

---

**Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below**

---

## Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

### Software as a Service Management

#### HPE Compute Ops Management

##### Base SKU

HPE Compute Ops Management Enhanced 3-year Upfront ProLiant SaaS R7A11AAE

##### Upgrade SKUS

HPE Compute Ops Management Enhanced 1-year Upfront ProLiant SaaS R7A10AAE

HPE Compute Ops Management Enhanced 5-year Upfront ProLiant SaaS R7A12AAE

##### HPE OneView

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU E5Y35AAE

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU P8B26AAE

**Notes:** For customers purchasing HPE Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

HPE Compute Ops Management Base SaaS R6Z73AAE

For more information, visit the Compute Ops Management QuickSpecs: <https://www.hpe.com/psnow/doc/a50004263enw>

Supported Servers – CTO only. No OEM. – Complete list can be found here: Latest Supported Server List:

<https://www.hpe.com/info/com-supported-servers>

### HPE Unique Options

HPE ProLiant DL380 Gen11 12EDSFF Drive Cage Kit P48808-B21

##### Notes:

- This is the 12EDSFF drive cage.
- This drive cages holds a maximum of 12 single thickness EDSFF drives
- Available for Factory Install Only orders and not available for standalone or upgrade ordering.

HPE ProLiant DL380 Gen11 2SFF U.3 Primary/Secondary Riser Cage Kit P48810-B21

##### Notes:

- 2SFF drive cage for rear in Primary or Secondary riser position.
- This Drive cage can be selected with 8SFF CTO Server and 24SFF CTO Server Only.
- For 8SFF/ 24SFF CTO Server, Max = 2.

HPE ProLiant DL380 Gen11 2SFF U.3 HDD Stacking Drive Cage Kit P48811-B21

##### Notes:

- This is a 2SFF drive cage for front or rear. For a front mount it installs into Universal Media Bay.
- This drive cage supports controller and Direct Attach. If Direct Attached then it will support NVMe Drives only
- For 8SFF CTO Server, Max = 2.

HPE ProLiant DL380 Gen11 2SFF U.3 Side-by-Side Drive Cage Kit P48812-B21

##### Notes:

- This is 2SFF side-by-side drive cage for the 8LFF CTO server only.
- This Drive cage supports controller and Direct Attach. If Direct Attached then it will support NVMe drives only.
- Max = 1



## Core Options

HPE ProLiant DL380 Gen11 2U 8SFF x1 Tri-Mode U.3 Drive Cage Kit P48813-B21

**Notes:**

- This is an 8SFF U.3 x1 front drive cage.
- This drive cage can be selected with 8SFF CTO Server Only.
- Max =3
- If Qty3 of 8SFF Front cage is selected then High Performance Fan Kit (P48820-B21) must be selected.
- This Drive cage supports controller and Direct Attach. If Direct Attached then it will support SATA Drives only and connects to SATA port on motherboard.

HPE ProLiant DL380 Gen11 8SFF U.3 Premium Drive Cage Kit P48814-B21

**Notes:**

- This is an 8SFF U.3 x4 front drive cage.
- This Drive cage can be selected with 8SFF CTO Server Only.
- Max = 3
- If Qty3 is selected then High Performance Fan Kit (P48820-B21) must be selected.
- This drive cage supports controller and Direct Attach. If Direct Attached then it will support NVMe Drives only.

HPE ProLiant DL380 Gen11 4LFF SAS/SATA 12G LP Midplane Drive Cage Kit P48809-B21

**Notes:**

- This is the 4LFF mid-tray drive cage.
- This drive cage holds a maximum of 4LFF drives.
- Max 16LFF SAS/SATA is possible when storage controller is selected
- Max 14LFF SATA is possible if mid-tray is direct connected to motherboard

HPE ProLiant DL380 Gen11 8SFF x1 Tri-Mode 24G U.3 BC Midplane Drive Cage Kit P48815-B21

**Notes:**

- This is the 8SFF U.3 x1 mid-tray drive cage.
- This drive cage holds a maximum of 8 SAS/SATA/NVMe drives.

HPE ProLiant DL380 Gen11 2U 8SFF x4 U.3 Mid Tray Tri-Mode Drive Cage Kit P48816-B21

**Notes:**

- This is the 8SFF U.3 x4 mid-tray drive cage.
- This drive cage holds a maximum of 8 SAS/SATA/NVMe drives.

HPE ProLiant DL380 Gen11 2LFF Primary Riser Cage Kit P48823-B21

**Notes:**

- This is a 2LFF drive cage for the rear Primary Riser position.
- This Drive cage supports controller and Direct Attach. If Direct Attached then it will support SATA Drives only and connects to SATA port on motherboard.
- Max = 1
- This drive cage can be selected with 8LFF CTO Server and 12LFF CTO Server Only.

HPE ProLiant DL380 Gen11 2LFF Tertiary Riser Cage Kit P48826-B21

**Notes:**

- This is a 2LFF drive cage for the rear Secondary + Tertiary Riser position.
- Max = 1

HPE ProLiant DL380 Gen11 SFF Universal Media Bay Kit P50728-B21

**Notes:**

- This is the Universal Media Bay, it occupies an 8SFF drive cage slot on the front of the 8SFF CTO server.
- The Universal Media Bay can be selected with the 8SFF CTO Server only.

## Core Options

HPE ProLiant DL380 Gen11 2LFF LP Secondary Riser Cage Kit P51095-B21

**Notes:**

- This is a 2LFF drive cage for the rear Primary Riser position.
- Max = 1
- This drive cage can be selected with 8LFF CTO Server and 12LFF CTO Server Only.

HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit P48820-B21

**Notes:**

- If Processor above 205W is selected then High Performance Fan Kit is required.
- If 128GB or higher memory is selected then High Performance Fan Kit is required.
- If quantity 3 of front drive cage is selected, then High Performance Fan Kit is required.
- If NVMe is selected, then High Performance Fan Kit is required.
- 24SFF CTO server comes with High Performance Fan Kit installed.

HPE ProLiant DL380 Gen11 Max Performance Heat Sink Kit P48817-B21

**Notes:**

- If Q series Processor is selected then Max Performance Heat Sink is required.
- Max = 1

HPE ProLiant DL380/DL560 Gen11 High Performance 2U Heat Sink Kit P48818-B21

**Notes:**

- If Processor above 150W is selected then High Performance Heat Sink is required.
- Number of Heat Sinks selected must match number of processor(s) selected.

HPE ProLiant DL3XX/560 Gen11 High Performance Heat Sink Kit P48905-B21

**Notes:** This is a low profile high performance heatsink, this is only used when storage mid-tray is selected.

HPE ProLiant DL380 Gen11 Standard Heat Sink Kit P49145-B21

**Notes:** Standard heatsink is for CPUs with 150W or lower TDP.

HPE ProLiant DL380/DL560 Gen11 2U Rear Serial Port Cable Kit P48824-B21

HPE ProLiant DL380 Gen11 System Insight Display Kit P48819-B21

**Notes:** Max = 1

HPE ProLiant DL380 Compute Gen11 2U 8-pin GPU Power Cable Kit P77896-B21

## HPE Processors

### Processor Option Kits

#### 5<sup>th</sup> Generation Intel Xeon-Platinum

All SKUs below ship with processors only. Adequate fans and heatsinks must be selected. Supports "HPE DDR5 Smart Memory – Registered (RDIMM), 5600MT/s".

Intel Xeon-Platinum 8593Q 2.2GHz 64-core 385W Processor for HPE P68449-B21

**Notes:**

- XCC die
- Max 2
- Requires selection of Max Performance Heat Sink or DLC Module.

Intel Xeon-Platinum 8592+ 1.9GHz 64-core 350W Processor for HPE P67089-B21

**Notes:**

- XCC die
- Max 2

## Core Options

Intel Xeon-Platinum 8592V 2.0GHz 64-core 330W Processor for HPE	P67107-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Platinum 8581V 2.0GHz 60-core 270W Processor for HPE	P67109-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 1</li></ul>	
Intel Xeon-Platinum 8580 2.0GHz 60-core 350W Processor for HPE	P67088-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Platinum 8570 2.1GHz 56-core 350W Processor for HPE	P67087-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Platinum 8568Y+ 2.3GHz 48-core 350W Processor for HPE	P67086-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Platinum 8562Y+ 2.8GHz 32-core 300W Processor for HPE	P67085-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Platinum 8558P 2.7GHz 48-core 350W Processor for HPE	P67108-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Platinum 8558 2.1GHz 48-core 330W Processor for HPE	P67097-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Platinum 8558U 2.0GHz 48-core 300W Processor for HPE	P67102-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 1</li></ul>	
Intel Xeon-Gold 6558Q 3.2GHz 32-core 350W Processor for HPE	P67098-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li><li>– Requires selection of Max Performance Heat Sink or DLC Module</li></ul>	

## Core Options

Intel Xeon-Gold 6554S 2.2GHz 36-core 270W Processor for HPE	P67110-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6548N 2.8GHz 32-core 250W Processor for HPE	P67105-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6548Y+ 2.5GHz 32-core 250W Processor for HPE	P67082-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6544Y 3.6GHz 16-core 270W Processor for HPE	P67084-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6542Y 2.9GHz 24-core 250W Processor for HPE	P67081-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6538N 2.1GHz 32-core 205W Processor for HPE	P67104-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6538Y+ 2.2GHz 32-core 225W Processor for HPE	P67096-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6534 3.9GHz 8-core 195W Processor for HPE	P67083-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6530 2.1GHz 32-core 270W Processor for HPE	P67095-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– XCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 6526Y 2.8GHz 16-core 195W Processor for HPE	P67080-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	
Intel Xeon-Gold 5520+ 2.2GHz 28-core 205W Processor for HPE	P67094-B21
<b>Notes:</b> <ul style="list-style-type: none"><li>– MCC die</li><li>– Max 2</li></ul>	

## Core Options

Intel Xeon-Gold 5515+ 3.2GHz 8-core 165W Processor for HPE P67079-B21

**Notes:**

- MCC die
- Max 2

Intel Xeon-Silver 4516Y+ 2.2GHz 24-core 185W Processor for HPE P67093-B21

**Notes:**

- MCC die
- Max 2

Intel Xeon-Silver 4514Y 2.0GHz 16-core 150W Processor for HPE P67092-B21

**Notes:**

- MCC die
- Max 2

Intel Xeon-Silver 4510 2.4GHz 12-core 150W Processor for HPE P67091-B21

**Notes:**

- EE LCC die
- Max 2
- If this Processor is selected, then 96GB 5600B Memory cannot be selected.

Intel Xeon-Silver 4509Y 2.6GHz 8-core 125W Processor for HPE P67090-B21

**Notes:**

- EE LCC die
- Max 2
- If this Processor is selected, then 96GB 5600B Memory cannot be selected.

Intel Xeon-Bronze 3508U 2.1GHz 8-core 125W Processor for HPE P67100-B21

**Notes:**

- EE LCC die
- Max 1
- If this Processor is selected, then 96GB 5600B Memory cannot be selected.
- Supports PCIe4.0 Only

### 4<sup>th</sup> Generation Intel Xeon-Platinum

**Notes:** All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.

Intel Xeon-Platinum 9462 2.7GHz 32-core 350W Processor for HPE P49645-B21

**Notes:** This is Intel High Bandwidth Memory (HBM) CPU.

Intel Xeon-Platinum 8490H 1.9GHz 60-core 350W Processor for HPE P49630-B21

Intel Xeon-Platinum 8480+ 2.0GHz 56-core 350W Processor for HPE P49607-B21

Intel Xeon-Platinum 8470Q 2.1GHz 52-core 350W Processor for HPE P49609-B21

Intel Xeon-Platinum 8470 2.0GHz 52-core 350W Processor for HPE P49606-B21

Intel Xeon-Platinum 8470N 1.7GHz 52-core 300W Processor for HPE P49649-B21

Intel Xeon-Platinum 8468V 2.4GHz 48-core 330W Processor for HPE P49631-B21

Intel Xeon-Platinum 8468 2.1GHz 48-core 350W Processor for HPE P49605-B21

Intel Xeon-Platinum 8458P 2.7GHz 44-core 350W Processor for HPE P49632-B21

Intel Xeon-Platinum 8460Y+ 2.0GHz 40-core 300W Processor for HPE P49604-B21

Intel Xeon-Platinum 8452Y 2.0GHz 36-core 300W Processor for HPE P49616-B21

Intel Xeon-Platinum 8444H 2.9GHz 16-core 270W Processor for HPE P49625-B21

### 4<sup>th</sup> Generation Intel Xeon-Gold

**Notes:** All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.

Intel Xeon-Gold 6458Q 3.1GHz 32-core 350W Processor for HPE P49608-B21

Intel Xeon-Gold 6448H 2.4GHz 32-core 250W Processor for HPE P49622-B21

## Core Options

Intel Xeon-Gold 6448Y 2.1GHz 32-core 225W Processor for HPE	P49600-B21
Intel Xeon-Gold 6444Y 3.6GHz 16-core 270W Processor for HPE	P49602-B21
Intel Xeon-Gold 6442Y 2.6GHz 24-core 225W Processor for HPE	P49599-B21
Intel Xeon-Gold 6438N 2.0GHz 32-core 205W Processor for HPE	P49638-B21
Intel Xeon-Gold 6438Y+ 2.0GHz 32-core 205W Processor for HPE	P49615-B21
Intel Xeon-Gold 6434 3.7GHz 8-core 195W Processor for HPE	P49601-B21
Intel Xeon-Gold 6430 2.1GHz 32-core 270W Processor for HPE	P49614-B21
Intel Xeon-Gold 6454S 2.2GHz 32-core 270W Processor for HPE	P49654-B21
Intel Xeon-Gold 6426Y 2.5GHz 16-core 185W Processor for HPE	P49598-B21
Intel Xeon-Gold 6414U 2.0GHz 32-core 250W Processor for HPE	P49619-B21
<b>Notes:</b> Single socket capable, no dual socket support.	
Intel Xeon-Gold 6421N 1.8GHz 32-core 185W Processor for HPE	P49641-B21
Intel Xeon-Gold 6418H 2.1GHz 24-core 185W Processor for HPE	P49621-B21
Intel Xeon-Gold 6416H 2.2GHz 18-core 165W Processor for HPE	P49620-B21
Intel Xeon-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE	P49597-B21
Intel Xeon-Gold 5416S 2.0GHz 16-core 150W Processor for HPE	P49653-B21
Intel Xeon-Gold 5418N 1.8GHz 24-core 165W Processor for HPE	P49640-B21
Intel Xeon-Gold 5418Y 2.0GHz 24-core 185W Processor for HPE	P49612-B21
Intel Xeon-Gold 5420+ 2.0GHz 28-core 205W Processor for HPE	P49613-B21
Intel Xeon-Gold 5411N 1.9GHz 24-core 165W Processor for HPE	P49639-B21
<b>4<sup>th</sup> Generation Intel Xeon-Silver</b>	
<b>Notes:</b> All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.	
Intel Xeon-Silver 4410Y 2.0GHz 12-core 150W Processor for HPE	P49610-B21
Intel Xeon-Silver 4416+ 2.0GHz 20-core 165W Processor for HPE	P49611-B21
<b>4<sup>th</sup> Generation Intel Xeon-Bronze</b>	
<b>Notes:</b> All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.	
Intel Xeon-Bronze 3408U 1.8GHz 8-core 125W Processor for HPE	P49617-B21

## Memory Selection

To streamline the configuration process for HPE ProLiant Gen11 servers and to provide the best product availability, HPE recommends memory from the list located here: <https://www.hpe.com/products/recommend>.

Best product availability is limited to US, Canada, and Latin America at this time.

### Notes:

- HPE Server Memory compatibility for a specific server platform may vary or be limited within a server platform depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for an HPE server model or family and yet occasionally not be supported with some configurations within that server family
- Maximum memory capacity and speed per processor is dependent on processor model selection or limitation.

## HPE DDR5 Memory

### Registered DIMMs (RDIMMs)

HPE 16GB (1x16GB) Single Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64705-B21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64706-B21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64707-B21

**Notes:** If Memory Fault Tolerance is selected then only x4 memory options can be selected.

## Core Options

HPE 96GB (1x96GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit P64708-B21

### Notes:

- 96GB Memory cannot be mixed with any other Memory.
- 96GB 5600 Memory cannot be selected with EE LCC (Edge Enhanced Low Core Count) die of the New 5th Generation Intel® Xeon® Scalable Processors.
- For 1 Processor, the allowed qty of 96GB 5600 Memory is 1, 6, 8, 12,16 only.
- For 2 Processor, the allowed qty of 96GB 5600 Memory is 2, 12, 16, 24, 32 only.
- If Memory Fault Tolerance is selected, then only x4 memory options can be selected.

HPE 128GB (1x128GB) Quad Rank x4 DDR5-5600 CAS-52-45-45 EC8 Registered 3DS Smart Memory Kit P64709-B21

**Notes:** If Memory Fault Tolerance is selected then only x4 memory options can be selected.

HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P43322-B21

HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P43328-B21

HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit P43331-B21

**Notes:** If Memory Fault Tolerance is selected then only x4 memory options can be selected.

HPE 96GB (1x96GB) Dual Rank x4 DDR5-4800 CAS-46-45-45 EC8 Registered Smart Memory Kit P66675-B21

**Notes:** 96GB DIMMs supported on XCC and MCC processors only.

HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit P43334-B21

HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit P43337-B21

HPE 256GB (1x256GB) Octal Rank x4 DDR5-5600 CAS-52-45-45 EC8 Registered 3DS Smart Memory Kit P64710-B21

### Notes:

- Memory should be installed in even quantity of DIMMs
- 4800 MT/s memory SKUs offer a transfer rate of 4800 MT/s at 1 DIMM per channel and 4400 MT/s at 2 DIMMs per channel
- Mixing of 3DS memory and non-3DS memory is not supported
- Mixing of x4 and x8 memory is not allowed
- If 96GB or higher density memory is selected then High Performance Fan Kit must be selected.
- 96GB memory cannot be mixed with any other memory.
- 96GB memory configuration must be either 8 or 16 only on 1 processor unit.
- 96GB memory configuration must be either 16 or 32only on 2 processor unit.

### HPE DDR Blank Kit

HPE DDR4 DIMM Blank Kit P07818-B21

**Notes:** DIMM Blanks are optional and not required.

### HPE Optical Drives

HPE 9.5mm SATA DVD-ROM Optical Drive 726536-B21

**Notes:** HPE DL38X Gen11 Universal Media Bay Kit (P50728-B21) is required for this option on a SFF model.

No support in 12LFF or 24SFF models.

HPE 9.5mm SATA DVD-RW Optical Drive 726537-B21

**Notes:** HPE DL38X Gen11 Universal Media Bay Kit (P50728-B21) is required for this option on a SFF model.

No support in 12LFF or 24SFF models.

HPE Mobile USB DVD-RW Optical Drive 701498-B21

**Notes:** This is only supported on USB 3.0 ports.

## Core Options

### Media Bay Kits

HPE ProLiant DL380 Gen11 SFF Universal Media Bay Kit

P50728-B21

#### Notes:

- The HPE DL380 Gen11 Universal Media Bay provides front Display Port and 2xUSB 2.0; plus support for 2x SFF front drives or 2 NVME front drives (riser required) and ODD support (Not included); and can only be located in Box1 in either an 8 SFF or 8+8 SFF model.
- This is a SFF model option only.
- Not supported on 12EDSFF, 24SFF, 12FF, or 8LFF CTO servers.

### HPE Hard Disk Drives

#### Mission Critical – 12G SAS – SFF Drives

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Self-encrypting FIPS HDD

P28618-B21

HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Self-encrypting FIPS HDD

P28622-B21

#### Enterprise – 12G SAS – SFF Drives

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD

P28352-B21

HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD

P53562-B21

HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD

P28586-B21

HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD

P53561-B21

HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD

P40430-B21

#### Midline – 6G SATA – SFF Drives

HPE 2TB SATA 6G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD

P28500-B21

#### Midline – 12G SAS – LFF Drives

HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD

P53553-B21

HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD

P23608-B21

HPE 14TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD

P09155-B21

HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD

881781-B21

HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD

834031-B21

HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD

861746-B21

HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD

833928-B21

HPE 2TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD

833926-B21

#### Midline – 6G SATA – LFF Drives

HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD

P53554-B21

HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD

P23449-B21

HPE 12TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD

881787-B21

HPE 8TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD

834028-B21

HPE 6TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD

861742-B21

HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD

861683-B21

HPE 2TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD

861681-B21

HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD

861686-B21

## Core Options

### SSD Selection

For SSD selection guidance, please visit <https://ssd.hpe.com/>

#### Read Intensive – NVMe – EDSFF – Solid State Drives

HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61187-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57807-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57803-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61183-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57803-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61179-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57799-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70392-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69234-B21

#### Mixed Use – NVMe – EDSFF – Solid State Drives

HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70399-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	P61191-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	P61195-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69241-B21

#### Read Intensive – 24G SAS – SFF – Solid State Drives

HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49045-B21
HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-2 PM7 SSD	P63875-B21
HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49041-B21
HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49035-B21
HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49031-B21
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21

#### Read Intensive – 12G SAS – SFF – Solid State Drives

HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40509-B21
HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40508-B21
HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40507-B21
HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40506-B21
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21

#### Mixed Use – 24G SAS – SFF – Solid State Drives

HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-2 PM7 SSD	P63871-B21
HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49057-B21
HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49053-B21
HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49049-B21
HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49047-B21

#### Mixed Use – 12G SAS – SFF – Solid State Drives

HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40512-B21
HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40511-B21
HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40510-B21

#### Read Intensive – 6G SATA – SFF – Solid State Drives

HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	P63886-B21
HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	P63886-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	P63910-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	P63910-B21
HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40501-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40500-B21

## Core Options

HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40499-B21
HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58236-B21
HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40497-B21
HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40498-B21
HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40496-B21
<b>Mixed Use – 6G SATA – SFF – Solid State Drives</b>	
HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40505-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40504-B21
HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58244-B21
HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40503-B21
HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40502-B21
<b>Mixed Use – 12G SAS – LFF – Solid State Drives</b>	
HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	P37009-B21
<b>Read Intensive – 6G SATA – LFF – Solid State Drives</b>	
HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	P47808-B21
<b>Read Intensive – NVMe – SFF – Solid State Drives</b>	
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70436-B21
HPE 15.36TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static SPDM Multi Vendor SSD	P69255-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63841-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70434-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63837-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64848-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63833-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64846-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50219-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63829-B21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64844-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-B21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64842-B21
<b>Mixed Use – NVMe – SFF – Solid State Drives</b>	
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70428-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63853-B21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65023-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50233-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70426-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63849-B21
HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65015-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50230-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63845-B21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65007-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-B21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P64999-B21

## Core Options

### Hard Drive Blank Kits

HPE Gen9 LFF HDD Spade Blank Kit	807878-B21
HPE Small Form Factor Hard Drive Blank Kit	666987-B21

### Hard Drive Cage Kits

HPE ProLiant DL380 Gen11 12EDSFF Drive Cage Kit	P48808-B21
---	------------

**Notes:** Currently available as Factory Install Only and not available for standalone or upgrade ordering.

HPE ProLiant DL380 Gen11 2U 8SFF x1 Tri-Mode U.3 Drive Cage Kit	P48813-B21
HPE ProLiant DL380 Gen11 8SFF U.3 Premium Drive Cage Kit	P48814-B21
HPE ProLiant DL380 Gen11 SFF Universal Media Bay Kit	P50728-B21
HPE ProLiant DL380 Gen11 2SFF U.3 HDD Stacking Drive Cage Kit	P48811-B21
HPE ProLiant DL380 Gen11 2SFF U.3 Side-by-Side Drive Cage Kit	P48812-B21
HPE ProLiant DL380 Gen11 2SFF U.3 Primary/Secondary Riser Cage Kit	P48810-B21
HPE ProLiant DL380 Gen11 8SFF x1 Tri-Mode 24G U.3 BC Midplane Drive Cage Kit	P48815-B21
HPE ProLiant DL380 Gen11 2U 8SFF x4 U.3 Mid Tray Tri-Mode Drive Cage Kit	P48816-B21
HPE ProLiant DL380 Gen11 4LFF SAS/SATA 12G LP Midplane Drive Cage Kit	P48809-B21
HPE ProLiant DL380 Gen11 2LFF Primary Riser Cage Kit	P48823-B21
HPE ProLiant DL380 Gen11 2LFF LP Secondary Riser Cage Kit	P51095-B21
HPE ProLiant DL380 Gen11 2LFF Tertiary Riser Cage Kit	P48826-B21

## HPE Networking

### 1 Gigabit Ethernet adapters

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P51178-B21
Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P21106-B21

### 10 Gigabit Ethernet adapters

**Notes:** Unless otherwise noted, one of the below 10Gb networking adapters below can be selected as the primary networking choice when configuring a Networking Choice (NC) Configure-to-Order (CTO) chassis. The DL380 Gen11 NC CTO chassis does not come with embedded networking, hence the requirement to configure with either a FlexibleLOM or select PCIe networking adapter.

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE	P26253-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE	P26259-B21

### 25 Gigabit Ethernet adapters

**Notes:** Unless otherwise noted, one of the below 10/25Gb networking adapters below can be selected as the primary networking choice when configuring a Networking Choice (NC) Configure-to-Order (CTO) chassis. The DL380 Gen11 NC CTO chassis does not come with embedded networking, hence the requirement to configure with either an OCP3 or select PCIe networking adapter.

Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P26264-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P26262-B21
HPE Ethernet 10/25Gb 2-port Secure Network Adapter	S2A69A
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P08443-B21
Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P08458-B21
Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P21109-B21
Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P42044-B21
Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21

### 100 Gigabit Ethernet Adapters

Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21
--	------------

## Core Options

### Recommended System Ambient Temperature

System Config	P25960-B21
8LFF	25C
24SFF	Not support
16SFF	25C
8SFF	25C

### Other Restrictions

1. These cards are not supported with 12LFF CTO server and 24SFF CTO server config.
2. Required to use High Performance Fan Kit (P48820-B21)
3. Only supported on x16 physical and electrical slots.

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE

P21112-B21

### Recommended System Ambient Temperature

System Config	P21112-B21
8LFF	25C
24SFF	Not supported
16SFF	25C
8SFF	30C

### Notes:

- This adapter requires High Performance Fan Kit (P48820-B21).
- Not supported on 8SFF CTO server with 3x drive cages.
- Not Supported with 24SFF and 12LFF CTO Servers.
- Only supported on x16 physical and electrical slots.

### 200 Gigabit Ethernet Adapters

Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE

P10180-B21

### Recommended Ambient Temperature

System Config	P10180-B21
8LFF	25C
24SFF	25C (3 max)
16SFF	25C
8SFF	30C

### 200 Gigabit Slingshot Adapters

HPE Slingshot SA210S Ethernet 200Gb 1-port PCIe NIC

R4K46A

### Notes:

- Can only be selected or configured for a Cray or Slingshot Solution. Not allowed for a Non-Cray or Non-Slingshot Solution.
- Cannot have the following networking options configured within the same server: Slingshot 11 or Slingshot 22.

### Storage Offload Adapters

HPE NV60100M 100Gb 2-port Storage Offload Adapter

R8M41A

**Notes:** This storage offload adapter requires selection 2 each of either 100GbE QSFP28 PSM4 500m XCVR OR 100GbE QSFP28 SR4 100m XCVR transceivers OR HPE 100GbE QSFP28 to QSFP28 5m AOC.

## Core Options

### OCP 3.0 Adapters

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P51181-B21
Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P08449-B21
Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE	P10097-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P26256-B21
Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P26269-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10115-B21
Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P41614-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10106-B21
Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P42041-B21
Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE	P22767-B21

### OCP 3.0 Enablement

HPE ProLiant DL360 Gen11 CPU1 to OCP2 x8 Enablement Kit	P51911-B21
HPE ProLiant DL3XX Gen11 OCP1 x16 Enablement Kit	P48827-B21
HPE ProLiant DL3XX Gen11 OCP2 x16 Enablement Kit	P48828-B21
HPE ProLiant DL3XX Gen11 CPU2 to OCP2 x8 Enablement Kit	P48830-B21

### DL380 Gen11 OCP 1 and OCP 2 Priority Support Matrix

OCP Slot Location	1 OCP Storage Controller (OROC) + 1 OCP NIC	1 OCP NIC	2 OCP NICs	1 OCP Storage Controller (OROC)	2 OCP Storage Controllers (OROC)
OCP 1	OROC	N/A	OCP NIC	OROC (Higher priority)	OROC (Higher priority)
OCP 2 (with shared NIC and WoL)	OCP NIC	NIC (higher priority)	OCP NIC (higher priority)	N/A	OROC

### HPE InfiniBand

HPE InfiniBand NDR/Ethernet 400Gb 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Adapter	P45641-B23
HPE InfiniBand NDR200/Ethernet 200Gb 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Adapter	P45642-B22
HPE InfiniBand NDR200/Ethernet 200GbE 2-port QSFP112 PCIe5 x16 MCX755106AC-HEAT Adapter	P65333-B21
HPE InfiniBand NDR 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Adapter	P45641-B21

#### Notes:

- High Performance Fan Kit is required (P48820-B21).
- Must be populated in x16 physical and electrical slot.
- Ambient temperature should not exceed 25C.

## Core Options

### Recommended Ambient Temperature

System Config	P31323-B21
8LFF	25C (only to OCP2)
24SFF	Not supported
16SFF	25C (only to OCP2)
8SFF	30C (only to OCP2)

HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 OCP3 MCX653436A-HDAI Adapter P31348-B21

### Recommended Ambient Temperature

System Config	P31323-B21
8LFF	Not supported
24SFF	Not supported
16SFF	Not supported
8SFF	25C (only to OCP2)

### Other Restrictions

1. High Performance Fan Kit is required (P48820-B21).
2. Not supported on 24SFF CTO server or 12LFF CTO server.
3. Ambient temperature should not exceed 25C.
4. OCP2 x16 Enablement Kit (P48828-B21) is required.
5. 256GB DIMMs not supported if these adapters are selected.
6. Max = 1 Could observe sub-optimal performance if installed in x8 slot.

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 MCX653105A-HDAT Adapter P23664-B21

### Recommended Ambient Temperature

System Config	P23664-B21
8LFF	25C
24SFF	25C
16SFF	25C
8SFF	30C

### Other Restrictions

1. High Performance Fan Kit is required (P48820-B21).
2. Must be populated in x16 physical and electrical slot.
3. Ambient temperature should not exceed 25C.

If configured for a Cray or Slingshot Solution, this option is to be used as the Slingshot 10 networking card.

HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 MCX653106A-HDAT Adapter P31324-B21

### Recommended System Ambient Temperature

System Config	P31324-B21
8LFF	25C
24SFF	Not supported
16SFF	25C
8SFF	25C

### Other Restrictions

1. High Performance Fan Kit is required (P48820-B21).
2. Not supported on 24SFF CTO server or 12LFF CTO server.
3. Must be populated in x16 physical and electrical slot.
4. Ambient temperature should not exceed 25C.

If configured for a Cray or Slingshot Solution, this option is to be used as the Slingshot 10 networking card.

## Core Options

HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter 829335-B21

### Notes:

- High Performance Fan Kit is required (P48820-B21).
- Must be populated in x16 physical and electrical slot.

HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe4 x16 MCX653105A-ECAT Adapter P23665-B21

**Notes:** High Performance Fan Kit is required (P48820-B21).

HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe4 x16 MCX653106A-ECAT Adapter P23666-B21

### Recommended Ambient Temperature

System Config	P23665-B21	P23666-B21
8LFF	30C	25C
24SFF	30C	Not supported
16SFF	30C	25C
8SFF	30C	30C

### Notes:

- High Performance Fan Kit is required (P48820-B21).
- Must be populated in x16 physical and electrical slot.
- If 2SFF drive cage is selected then Max = 2
- Max = 4

## HPE I/O Expansion Options

### Notes:

- The Primary Riser shipping default in the CTO server is a x8 FH, FL, x16 FH, FL and x8 FH, HL.
- For a Secondary/Tertiary riser, the second processor is required.
- x16 cards installed on x8 slots could observe sub-optimal performance.

HPE ProLiant DL380 Gen11 2U x16/x16/x16 Primary Riser Kit P48803-B21

### Notes:

- Slot 1 – PCIe 5.0 x16 Full Height and Full Length
- Slot 2 – PCIe 5.0 x16 Full Height and Full Length
- Slot 3 – PCIe 5.0 x16 Full Height and Half Length
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary riser must be selected and defaulted.
- If this Primary Riser is selected, then default Primary Riser is replaced with this riser.
- If Slot 1 of HPE DL380 Gen11 2U 3x16 Primary Riser Kit needs to be enabled then 3 x16 Primary Cable Kit (P56073-B21) must be selected.
- If Primary 3 x16 Cable Kit is NOT selected, then only Slot 2 and Slot 3 will be available for PCIe card selection and no PCIe cards can be selected for Slot 1.

HPE ProLiant DL380 Gen11 2U x16/x16/x16 Secondary Riser Kit P51083-B21

### Notes:

- Slot 4 - PCIe 5.0 x16 Full Height and Full Length
- Slot 5 - PCIe 5.0 x16 Full Height and Full Length
- Slot 6 - PCIe 5.0 x16 Full Height and Half Length
- When 2LFF Tertiary Cage is selected then Secondary and Tertiary Riser cannot be selected.
- When 2LFF Secondary Cage is selected then Secondary Riser cannot be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 SEC Riser must be selected and defaulted.
- If Slot 4 of HPE DL380 Gen11 2U 3x16 Secondary Riser Kit needs to be enabled then 3 x16 Secondary Cable Kit (P56074-B21) must be selected.

## Core Options

- If Secondary 3 x16 Cable Kit is NOT selected, then only Slot 5 and Slot 6 will be available and no PCIe cards can be selected for Slot4.
- If Secondary OR Tertiary Riser is selected, then Second Processor must be selected.
- Tertiary Riser and Secondary 3 x16 Riser cannot be selected together.

HPE ProLiant DL380 Gen11 2U Primary/Secondary NEBS-compliant Riser Kit

P48805-B21

### Notes:

- GPU and NEBS Riser cannot be selected together.
- When this riser is selected it replaces the default Primary Riser.
- When Primary and Secondary NEBS risers are selected the Tertiary Riser cannot be selected.
- NEBS risers cannot be mixed with other non-NEBS risers.

HPE ProLiant DL380 Gen11 2U Secondary/Tertiary NEBS-compliant Riser Kit

P48806-B21

### Notes:

- This riser requires selection of second processor.
- GPU and NEBS Riser cannot be selected together.
- When Primary and Secondary NEBS risers are selected the Tertiary Riser cannot be selected.
- NEBS risers cannot be mixed with other non-NEBS risers.
- When 24 NVMe or 32 NVMe bundles are selected the Tertiary Riser cannot be selected.

HPE ProLiant DL380 Gen11 2U x8/x16/x8 Secondary Riser Kit

P48802-B21

### Notes:

- Slot 4 – PCIe 5.0 x8 Full Height and Full Length
- Slot 5 – PCIe 5.0 x16 Full Height and Full Length
- Slot 6 – PCIe 5.0 x8 Full Height and Half Length
- If quantity 1 of 2SFF Primary/Secondary Drive Cage is selected, then HPE DL380 Gen11 x8x16x8 secondary riser is required.
- If quantity 1 of 2SFF Primary/Secondary Drive Cage is selected, then top two slots (Slot 4 and Slot 5) of HPE DL380 Gen11 x8x16x8 Secondary Riser will be blocked by Drive Cage.
- If 2LFF Tertiary Drive Cage is selected, then Secondary and Tertiary Riser cannot be selected.
- if 2LFF Secondary Drive Cage is selected then Secondary Riser cannot be selected.
- If 24NVMe Bundle is selected, then quantity 1 of HPE DL380 Gen11 x8x16x8 secondary riser must be selected.
- If Secondary OR Tertiary Riser is selected, then Second Processor must be selected.

HPE ProLiant DL380 Gen11 2U x16/x16 Tertiary Riser Kit

P48804-B21

### Notes:

- This is the tertiary riser.
- Slot 7 - PCIe 5.0 x16 Full Height and Full Length
- Slot 8 - PCIe 4.0 x16 Full Height and Full Length

HPE ProLiant DL380 Gen11 x16/x16/x16 Primary Cable Kit

P56073-B21

HPE ProLiant DL380 Gen11 x16/x16/x16 Secondary Cable Kit

P56074-B21

HPE ProLiant DL380 Gen11 2x16 Tertiary Riser x8 Enablement FIO Bundle Kit

P53632-B21

## Core Options

### Risers

Riser Information*							
Part number	Description	Riser position			Bus width (Gen5 lanes)		
		Primary	Secondary	Tertiary	Top slot	Middle Slot	Bottom slot
N/A	This is the default riser in the chassis	D	N	N	x8	x16	x8
P48803-B21	HPE DL380 Gen11 x16/x16/x16 Primary Riser Kit	O	N	N	x16	x16	x16 <sup>1</sup>
P51083-B21	HPE DL380 Gen11 x16/x16/x16 Secondary Riser Kit	N	O	N	x16	x16	x16 <sup>2</sup>
P48802-B21	HPE DL38X Gen11 x8/x16/x8 Sec Riser Kit	N	O	N	x8	x16	x8
P48804-B21	HPE DL38X Gen11 2x16 Tertiary Riser Kit	N	N	O	x16	x16 <sup>3</sup>	
P48805-B21	HPE ProLiant DL380 Gen11 2U Primary/Secondary NEBS-compliant Riser Kit	O	N	N	x8	x16	x8
P48806-B21	HPE ProLiant DL380 Gen11 2U Secondary/Tertiary NEBS-compliant Riser Kit	N	O	N	x8	x16	x8

#### Notes:

- D = Default on chassis; O = Optional; N = not supported or slot/connector not present.
- <sup>1</sup>Requires HPE DL380 Gen11 x16/x16/x16 Primary Cable Kit (P56073-B21)
- <sup>2</sup>Requires HPE DL380 Gen11 x16/x16/x16 Secondary Cable Kit (P56074-B21)
- <sup>3</sup>PCIe Gen4 lanes.
- x16 cards installed on x8 slots could observe sub-optimal performance.

### HPE Power Supplies

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38995-B21

**Notes:** Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit P03178-B21

**Notes:** Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38997-B21

**Notes:** Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit P17023-B21

**Notes:** Requires selection of HPE 1600W DC PSU power lug option kit OR HPE 1600W DC PSU Power Cable Kit.

HPE 1600W -48VDC Power Cable Lug Kit P36877-B21

HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit P44712-B21

#### Notes:

- Flex Slot Platinum power supplies support power efficiency of up to 94% and are EU Lot 9 compliant.
- Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements. HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

## Core Options

### HPE Cooling Options

HPE ProLiant DL380/DL560 Gen11 2U High Performance Fan Kit P48820-B21

**Notes:**

- This kit is required for specific **Ambient temperature environments**.
- High Performance fan kit consists of 6 fans, these will need to replace all the standard fans in the unit and fill all 6 fan cages.
- The 24SFF CTO server will already include 6 High Performance fans.
- The High-Performance fan kit is needed to support certain ASHRAE operating environments.
- For elevated ambient temperature support please see: **DL380 Gen11 Extended Ambient Temperature Guidelines**.

HPE ProLiant DL380 Gen11 Standard Fan Kit P49146-B21

**Notes:**

- Includes two standard fans.
- Not supported with 24SFF and 12EDSFF CTO Server.
- High Performance Fan Kit and Standard Fan Kit cannot be selected together.
- High Performance Fan Kit can be selected over Standard Fan Kit in all configurations.

HPE ProLiant DL380 Gen11 Max Performance Heat Sink Kit P48817-B21

**Notes:** This kit is required for “Q” series processors.

HPE ProLiant DL380/DL560 Gen11 High Performance 2U Heat Sink Kit P48818-B21

**Notes:** This kit is CPUs with TDP over 150W.

HPE ProLiant DL3XX/560 Gen11 High Performance Heat Sink Kit P48905-B21

**Notes:** This kit is a low-profile high performance heatsink. This heatsink is required when a mid-tray storage cage is selected.

HPE ProLiant DL380 Gen11 Standard Heat Sink Kit P49145-B21

**Notes:** The standard heatsink is for CPUs with TDP equal to or lower than 150W.

### HPE Direct Liquid Cooling Options for HPE ProLiant DL380 Gen11

HPE ProLiant DL380 Gen11 Cold Plate Module NS204 Quick Disconnect Tube Set FIO Kit P62023-B21

**Notes:**

- This kit is the Direct Liquid Cooling Kit that uses the NS204i-u slot for connections
- If this option is selected the HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device(P48183-B21) cannot be selected.
- This kit contains 2 Cold Plate Modules and 1 Quick Disconnect Module.

HPE ProLiant DL3XX Gen11 Cold Plate Module FIO Kit from PCIe P62029-B21

**Notes:**

- This kit is the Direct Liquid Cooling Kit that uses a PCIe slot on the Primary Riser.
- If this option is selected the Primary Riser will have one less PCIe slot available for PCIe adapters. Please keep this in mind when considering total number of PCIe adapters required.
- This kit contains 2 Cold Plate Modules and 1 Quick Disconnect Module.

HPE ProLiant DL3XX Gen11 Direct Liquid Cooling 600mm FIO Hose Kit P62038-B21

**Notes:**

- This kit includes the 65CM tube kit for Direct Liquid Cooling.
- This kit must be selected when using the Direct Liquid Colling Kit in the NS204i-u slot (P62023-B21).

HPE ProLiant DL3XX Gen11 Direct Liquid Cooling 55cm Quick Disconnect Tube Set FIO Kit P62042-B21

**Notes:**

- This kit includes the 55CM tube kit for Direct Liquid Cooling.
- This kit must be selected when using the Direct Liquid Colling Kit in the Primary Riser slot (P62029-B21).

## Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

### HPE Computation and Graphics Accelerators

NVIDIA H100 NVL 94GB PCIe Accelerator for HPE

S2D86C

#### Notes:

- Max = 3
- This GPU is PCIe x16, so it must be populated on a x16 slot only. The “PCIe Card Capacity Limits” must account for this limitation.
- Thermal constraints for this GPU are based on ambient temperature of 25 degrees Centigrade.
- Mixing of Graphics options is not allowed.
- High Performance Fan Kit is required.
- The system memory must be at least twice the memory of all GPUs.
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- If this GPU is selected, then HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected.
- For best performance across common workloads, HPE recommends system main memory at least twice the memory of all GPU.
- Full Length (FL) PCIe Card and Mid Tray cannot be selected together.
- GPU and NEBS Riser cannot be selected together.

NVIDIA RTX 4000 Ada Graphics Accelerator for HPE

S3T54C

#### Notes:

- Max = 5
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- Thermal constraints for this GPU are based on ambient temperature of 25 degrees Centigrade.
- Mixing of Graphics options is not allowed.
- High Performance Fan Kit is required.
- The system memory must be at least twice the memory of all GPUs.
- If this GPU is selected, then HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected.
- GPU and NEBS Riser cannot be selected together.

Intel Data Center GPU Max 1100 48GB Accelerator for HPE

S1T66C

#### Notes:

- Max = 3
- This GPU is PCIe x16, so it must be populated on a x16 slot only. The “PCIe Card Capacity Limits” must account for this limitation.
- Thermal constraints for this GPU are based on ambient temperature of 25 degrees Centigrade.
- Mixing of GPU types is not allowed.
- High Performance Fan Kit is required.
- This GPU is not supported with 12LFF CTO Server and 24SFF CTO Server.
- The system memory must be at least twice the memory of all GPUs.
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- For the DL380 Gen11 12EDSFF CTO Server, if EDSFF Bundle is selected then this GPU cannot be selected.
- If this GPU is selected, then HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected.
- If this GPU is selected, then High Performance Heatsink or Direct Liquid Cooling (DLC) must be selected.



## Additional Options

- If this GPU is selected with Intel Liquid Cooled Processors (Q) then Direct Liquid Cooling (DLC) must be selected.

NVIDIA H100 80GB PCIe Accelerator for HPE

R9S41C

### Notes:

- Max = 3
- Must be populated in x16 slot.
- System memory should be 2x of GPU memory.
- Requires selection of High-Performance Fan Kit.
- This GPU requires HPE ProLiant DL380/DL560 Gen11 2U GPU Power Cable Kit - P56072-B21
- Not supported with 12LFF CTO Server, 24SFF CTO Server, or 8SFF CTO Server with 3x 8SFF drive cages.
- For 12EDSFF CTO Server, If no additional cage is selected then Max of 2 GPU can be selected per Server.
- On 12EDSFF CTO Server, when one additional 8SFF cage is selected with DLC Component then Max 1 GPU can be selected per sever.
- On 8SFF CTO Server, If Qty2 of 8SFF Front cage is selected with DLC Component then Max 1 GPU can be selected per sever.
- On 8SFF CTO Server, If Qty2 of 8SFF Front cage is selected without DLC Component then this GPU is not supported.
- For 12EDSFF CTO Server, when additional cages are selected without DLC Component then this GPU is not supported
- On 8LFF CTO Server, If DLC component is selected then Max 1 GPU can be selected per sever.
- If Qty1 of this GPU is selected, then Secondary OR Tertiary Riser Must be selected.
- If Qty2 of this GPU is selected, then Secondary AND Tertiary Riser Must be selected.

NVIDIA L40S 48GB PCIe Accelerator

S2L70C

### Notes:

- Max = 2
- Must be populated in x16 slot.
- If Qty2 of DW GPU is selected with no tertiary riser, then primary 3 x16 riser cable and secondary 3 x16 Riser Cable cannot be selected.
- Thermal constraints are based on Ambient Temp 25C.
- Mixing of GPU types is not allowed.
- For 8SFF/ 8LFF/ 12LFF/ 12EDSFF CTO Server, If GPU is selected then High-Performance Fan Kit must be selected and defaulted.
- This GPU is not supported with 12LFF CTO Server and 24SFF CTO Server.
- For 8SFF CTO Server, If Qty3 of 8SFF Front cage is selected then this GPU cannot be selected.
- For best performance across common workloads, HPE recommends system main memory at least twice the memory of all GPU.
- If doublewide GPU is selected on this riser, then the top x16 PCIe slot (FH FL) connector on this riser kit cannot be utilized as the doublewide GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- If Qty1 of 2SFF primary/secondary cage is selected, then Doublewide GPU Cannot be populated on HPE DL380 G11 2U x8/x16/x8 Sec Riser Kit.
- If Qty2 of 2SFF Primary/secondary cage is selected, then Doublewide GPU Cannot be populated on HPE DL380 G11 2U x8/x16/x8 Sec Riser Kit and Default Primary Riser.
- Full Length (FL) PCIe Card and Mid Tray cannot be selected together.
- For 12EDSFF CTO Server, If EDSFF Bundle is selected then this GPU cannot be selected.
- If this GPU is selected, then HPE DL380/DL560 Gen11 2U GPU Power Cable Kit must be selected and defaulted.
- For 8SFF CTO Server, If Qty1 of 8SFF Front cage is selected then Max of 2 GPU can be selected per Server.
- For 12EDSFF CTO Server, if no additional cage is selected then Max of 2 GPU can be selected per Server.



## Additional Options

- For 8SFF CTO Server, If Qty2 of 8SFF Front cage is selected with NO DLC Component then this GPU is not supported.
- For 12EDSFF CTO Server, if additional cage is selected with NO DLC Component then this GPU is not supported
- For 8LFF CTO Server, If NO DLC component is selected then this GPU is not supported.
- For 8SFF CTO Server, If Qty2 of 8SFF Front cage is selected with DLC Component then Max 1 GPU can be selected per sever.
- For 12EDSFF CTO Server, if one additional 8SFF cage is selected with DLC Component then Max 1 GPU can be selected per sever.
- For 8LFF CTO Server, If DLC component is selected then Max 1 GPU can be selected per sever.
- For 8SFF CTO Server with two 8SFF cages/ 8LFF CTO Server/ 12EDSFF CTO Server with 8SFF Cage or EDSFF Bundle/ 12LFF CTO Server/ 24SFF CTO Server,
- If Qty1 or 2 of this GPU is selected with NO DLC Component then Secondary 3x16 cable cannot be selected
- If Qty1 of this GPU is selected then Secondary OR Tertiary Riser Must be selected. If Qty2 of this GPU is selected then Secondary AND Tertiary Riser Must be selected.
- GPU and NEBS Riser cannot be selected together.
- If Full Length (FL) GPU is selected then High Performance HS or DLC must be selected for Processors.
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.
- If Doublewide GPU is selected on default Primary Riser then the top x16 PCIe slot (FH FL) connector CANNOT be utilized as the Doublewide GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- If this GPU is selected then Secondary 3x16 cable cannot be selected.
- This GPU cannot be populated on primary Riser. The “PCIe Card Capacity Limits” must account for this limitation.
- For 8SFF CTO Server with two 8SFF cages/ 8LFF CTO Server/ 12EDSFF Server with one 8SFF Cage, If Qty1 this GPU is selected with DLC Module then Tertiary Riser must be selected. GPU is populated on Tertiary Riser.

NVIDIA L40 48GB PCIe Accelerator for HPE

SOK90C

### Notes:

- Max = 3
- Must be populated in x16 slot.
- System memory should be 2x of GPU memory.
- Requires selection of High-Performance Fan Kit.
- This GPU requires HPE ProLiant DL380/DL560 Gen11 2U GPU Power Cable Kit - P56072-B21
- On 8SFF CTO Server, if Qty2 of 8SFF Front cage is selected without DLC component then Max of 2 GPU can be selected per Server.
- On 8SFF CTO Server, if Qty1 of 8SFF Front cage is selected then Max of 3 GPU can be selected per Server.
- On 8LFF CTO Server, if NO DLC component is selected then Max of 2 GPU can be selected per Server
- On 8LFF CTO Server, if DLC component is selected then Max of 3 GPU can be selected per Server.
- On 12LFF CTO Server, 24SFF CTO Server, or 8SFF CTO Server with Qty3 8SFF drive cages if NO DLC component is selected then Max of 1 GPU can be selected per Server
- On 12LFF CTO Server, 24SFF CTO Server, or 8SFF CTO Server with Qty3 8SFF drive cages and DLC component is selected then Max of 2 GPU can be selected per Server.
- On 12EDSFF CTO Server, if one additional 8SFF cage is selected without DLC Component then Max 2 GPU can be selected per sever.
- On 12EDSFF CTO Server, if one additional 8SFF cage is selected with DLC Component then Max 3 GPU can be selected per sever.
- On 8SFF CTO Server, if Qty2 of 8SFF Front cage is selected with DLC component then Max of 3 GPU can be selected per Server.

## Additional Options

NVIDIA L4 24GB PCIe Accelerator for HPE

S0K89C

**Notes:**

- Max = 8
- System memory should be 2x of GPU memory.
- Requires selection of High-Performance Fan Kit
- On 12LFF CTO Server, 24SFF CTO Server, or 8SFF CTO Server with Qty3 8SFF drive cages are selected without DLC component then Max of 5 can be selected per server

NVIDIA A16 64GB PCIe Non-CEC Accelerator for HPE

R8T26C

**Notes:**

- Max = 3
- System memory should be 2x of GPU memory.
- This GPU requires power Cable Kit (P39102-B21) to also be selected.
- This GPU requires HPE DL380/DL560 G11 2U High Perf Fan Kit P48820-B21.

Intel Data Center GPU Max 1100 48GB Accelerator for HPE

S1T66C

**Notes:**

- Max = 3
- This GPU is PCIe x16, so it must be populated on a x16 slot only. The “PCIe Card Capacity Limits” must account for this limitation.
- Mixing of GPU types is not allowed.
- Requires selection of High-Performance Fan Kit.
- System memory should be 2x of GPU memory.
- Quantity1 of this cable can support max of 3 double wide GPUs.
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- Full Length (FL) PCIe Card and Mid Tray cannot be selected together.
- This GPU requires HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21)
- If Qty2 of this GPU is selected, then Secondary Riser must be selected.
- For 12LFF CTO Server/ 24SFF CTO Server/ 8SFF CTO Server with front 3 8SFF Cage/ 12EDSFF CTO Server with EDSFF Bundle, if this GPU is selected then DLC Must be selected.
- If Qty3 of DW GPU is selected, then primary 3 x16 Riser cable and secondary 3 x16 Riser Cable cannot be selected.

HPE ProLiant DL300 Gen10 Plus GPU 8-pin Keyed Cable Kit

P39102-B21

**Notes:**

- This GPU power cable is used for NVIDIA A16.
- One power cable supports up to 3x GPUs

HPE ProLiant DL380/DL560 Gen11 2U GPU Power Cable Kit

P56072-B21

**Notes:**

- This GPU power cable is used for NVIDIA H100 and NVIDIA L40 GPUs.
- One power cable supports up to 3x GPUs

## Additional Options

### GPU Information

**Notes:** The listed ambient temperatures represent the maximum levels allowed without any impact on system performance (e.g., throttling). It is possible to exceed these temperatures by an additional +5°C without causing a system shutdown, but performance degradation might be expected.

HPE DL380 Gen11 Configuration						
Part number	Card	Qty Supported	PCIe	8SFF	16SFF/8LFF	24SFF/12LFF
S1T66C	Intel® Data Center GPU Max 1100	2 or 3	Gen5	3@30C(Air)	3@25C(Air) 3@30C(Air) if CPU ≤ 185W	Not Supported
R9S41C	NVIDIA H100 80GB PCIe Accelerator	2 or 3	Gen5	2@25C (Air) 3@25C (DLC)	2 @ 20C (Air) 2 @ 25C (DLC) 1 @ 25C (Air) if CPU ≤ 185W	Not Supported
S2D86C	NVIDIA H100 NVL 94GB PCIe Accelerator	1, 2 or 3	Gen5	3@27C (Air) 2@30C (Air) 3@30C (DLC)	3@18C (Air) 2@27C (Air) 3@25C (DLC)	1@25C (Air) 2@25C (DLC)
S3T54C	NVIDIA RTX 4000 Ada Graphics Accelerator for HPE	up to 5	Gen4	3@30C(Air) 3@30C(DLC) 5@27C(Air) 5@27C(DLC)	3@30C(Air) 3@30C(DLC) 5@27C(Air) 5@27C(DLC)	3@30C(Air) 3@30C(DLC) 5@27C(Air) 5@27C(DLC)
S0K90C	NVIDIA L40 48GB PCIe Accelerator	1, 2 or 3	Gen4	3@25C(Air) 2@30C(Air) 3@30C(DLC)	2@30C(Air) 3@25C(DLC) 2@30C(Air) if CPU ≤ 185W 3@25C(Air) if CPU ≤ 185W	1@25C(Air) 2@25C(DLC) 2@25C(Air) if CPU ≤ 185W
S2L70C	NVIDIA L40S 48GB PCIe Accelerator	1 or 2	Gen5	2@25C (Air) 3@25C (DLC)	2 @ 20C (Air) 2 @ 25C (DLC) 1 @ 25C (Air) if CPU ≤ 185W 3 @ 25C (DLC) if CPU ≤ 185W	Not Supported
S0K89C	NVIDIA L4 24GB PCIe Accelerator	Up to 8	Gen4	8@30C(Air) 8@30C(Air)	5@30C(Air) 8@25C(Air) 8@30C(DLC)	5@25C(Air) 8@25C(DLC)
R8T26C	NVIDIA A16 64GB PCIe Non-CEC Accelerator for HPE	1, 2 or 3	Gen4	30C	2@30C(Air) 3@30C(DLC) 3@25C(Air) if CPU ≤ 185W	1@30C(Air) 2@25C(Air) 3@25C(DLC) 3@25C(Air) if CPU ≤ 185W

Qty SFF Drive Cages	Cooling Method	NVIDIA A16
1 drive cage	Air Cooled + Heatsink	3
2 drive cages	Air Cooled + Heatsink	2
3 drive cages	Air Cooled + Heatsink	1
1 drive cage	Direct Liquid Cooling	3
2 drive cages	Direct Liquid Cooling	3
3 drive cages	Direct Liquid Cooling	2

## Additional Options

### Embedded Management

#### HPE iLO Common Password FIO Setting

HPE iLO Common Password FIO Setting

P08040-B21

##### Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

#### HPE iLO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features

E6U59ABE

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features

512485-B21

HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features

512487-B21

HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features

E6U64ABE

HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features

BD505A

HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features

BD507A

#### HPE Converged Infrastructure Management Software

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU

E5Y35AAE

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU

P8B26AAE

**Notes:** Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded.

### HPE Security

HPE Trusted Supply Chain for HPE ProLiant

P36394-B21

##### Notes:

- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries needing enhanced security and compliance needs. Applying this option to a DL380 Gen11 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL380 Gen11 is re-branded as a HPE ProLiant DL380T Gen11 to denote the HPE Trusted Supply Chain security enhancements. The DL380T Gen11 is Trade Agreement Act (TAA) compliant. Learn more at <https://www.hpe.com/security>
- This option requires the selection of HPE Gen11 Intrusion Detection Kit (P48922-B21)
- This option requires the selection of either HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features (BD505A) or HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features (512485-B21)
- This option is limited to stand-alone DL380 Gen11 CTO servers only. The HPE Trusted Supply Chain configuration will not be available if the server is ordered as factory integrated into a rack
- One instance of the following Electronic License to Use is required per order (not per server): R6X85AAE
- HPE Trusted Supply Chain E-LTU
- Logistics delivery speeds and services are available and selectable within Next Gen Quoter.
- This option cannot be selected with TAA instruction SKU nor TAA CTO Models

## Additional Options

HPE iLO Common Password FIO Setting P08040-B21

**Notes:**

- Replaces ILO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

HPE Gen11 2U Bezel Kit P50400-B21

HPE Bezel Lock Kit 875519-B21

**Notes:** Requires the bezel kit

### HPE Boot Controllers

HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device P48183-B21

**Notes:**

- This is the NS204i-u hot pluggable boot device
- Default is NVMe are internal to system and not hot pluggable
- If external accessible drives are needed please add trigger SKU P54542-B21 HPE ProLiant DL380 Gen11 NS204i-u FIO Bundle Kit. This trigger SKU allows NVMe drives to be externally accessible and hot pluggable.
- Max = 1

HPE ProLiant DL380 Gen11 NS204i-u Internal Cable Kit P52152-B21

**Notes:**

- If NS204i-u Gen11 Hot Plug Boot Option Device is selected then HPE DL380 Gen11 NS204i-u Internal Cable Kit is required.
- Max = 1

HPE ProLiant DL380 Gen11 NS204i-u FIO Bundle Kit P54542-B21

**Notes:**

- This SKU is required only when external accessible drives are required for the NS204i-u.
- Max = 1

## HPE Storage Controllers

The Gen11 storage controller portfolio has been updated to include new technology like OCP3.0 as well as PCIe adapters. For a more detailed breakout of the available Gen11 controllers visit the storage controllers QuickSpecs site:

### HPE MegaRAID Storage Controllers

#### HPE Tri-Mode Controllers

HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller P47777-B21

HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller P47781-B21

HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller P47785-B21

HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller P47789-B21

HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller P58335-B21

HPE ProLiant DL320/DL380 Gen11 PCIe Gen5 Retimer Card P48833-B21

**Notes:** When adding this Retimer as a field upgrade, it is recommended to update the UBM5 PIC to a minimum of version 1.10. This firmware can be downloaded at:

[https://support.hpe.com/connect/s/softwaredetails?language=en\\_US&softwareId=MTX\\_23c46bfbef394b5e9353075c5e](https://support.hpe.com/connect/s/softwaredetails?language=en_US&softwareId=MTX_23c46bfbef394b5e9353075c5e)

HPE SR932i-p Gen11 x32 Lanes 8GB Wide Cache PCI SPDM Plug-in Storage Controller P47184-B21

**Notes:** Requires x16 riser slot

## Additional Options

### Essential RAID Controllers

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804398-B21

### NVMe Adapter

HPE DL385 Gen10 Plus 12Gb NVMe 2-port Adapter P25527-B21

### HPE Cable Options

HPE ProLiant DL380 Gen11 12EDSFF CPU1/2 Cable Kit P52153-B21

HPE ProLiant DL360 Gen11 Storage Controller Enablement Cable Kit P48918-B21

HPE ProLiant DL380 Gen11 8SFF CPU1/2 NVMe Cable Kit P48825-B21

HPE ProLiant DL380 Gen11 8SFF OROC1/2 x2 Cable Kit P48829-B21

HPE ProLiant DL380 Gen11 2U Tri-Mode Premium Cable Kit P48831-B21

HPE ProLiant DL380 Gen11 Tri-Mode Splitter Cable Kit P48832-B21

HPE ProLiant DL380 Gen11 PCIe Gen5 Retimer Card Cable Kit P52154-B21

HPE ProLiant DL380 Gen11 8SFF to Retimer/-P Controller Cable Kit P54874-B21

HPE ProLiant DL380 Gen11 LFF Front Tri-Mode Cable Kit P56995-B21

### Optional Upgrades

HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit P01366-B21

HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit P02377-B21

**Notes:** Provides backup power for multiple HPE storage controllers or other devices.

### HPE Tape Backup

For the complete range of tape drives, autoloaders, libraries and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>.

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products please visit the StoreEver Tape Solutions in SPOCK (requires registration/login) <https://h20272.www2.hpe.com/SPOCK/default.aspx>.

Only external drives supported

All libraries and autoloaders supported via compatible FC or SAS controller. Refer to the StoreEver Tape Solutions Compatibility Matrix link above.

### HPE Storage Options

#### Emulex Fibre Channel HBAs

HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter R2J62A

HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter R2J63A

HPE SN1700E 64Gb 1-port Fibre Channel Host Bus Adapter R7N77A

HPE SN1700E 64Gb 2-port Fibre Channel Host Bus Adapter R7N78A

#### QLogic Fibre Channel HBAs

HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter R2E08A

HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter R2E09A

HPE SN1700Q 64Gb 1-port Fibre Channel Host Bus Adapter R7N86A

HPE SN1700Q 64Gb 2-port Fibre Channel Host Bus Adapter R7N87A

### HPE Racks

- Please see the HPE Advanced Series Racks QuickSpecs for information on additional racks options and rack specifications. [HPE G2 Advanced Series Racks](#)

## Additional Options

- Please see the HPE Enterprise Series Racks QuickSpecs for information on additional racks options and rack specifications. [HPE G2 Enterprise Series Racks](#)

---

### HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

---

### HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
- Please see the [HPE Direct Flow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

---

### HPE Rack Options

Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

---

### Easy Install Rail Kits

Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative.

#### Notes:

- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.
- HPE rail kits are designed to work with HPE racks in compliance with industry standard EIA-310-E. In the event a customer elects to purchase a third-party rack for use with an HPE rail kit, any such use is at customer's own risk. HPE makes no express or implied warranties with respect to such third-party racks and specifically disclaims any implied warranties of merchantability and fitness for a particular purpose. Furthermore, HPE has no obligation and assumes no liability for the materials, design, specifications, installation, safety, and compatibility of any such third-party racks with any rail kits, including HPE rail kits.

HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit

P52341-B21

**Notes:** Does not include Cable Management Arm (CMA) (P22020-B21).

HPE DL38X Gen10 Plus 2U Cable Management Arm for Rail Kit

P22020-B21

---

### HPE USB and SD Options

#### Notes:

- In vSphere 7.0, VMware made changes that impact the use of an SD Card/USB media as a standalone boot device and will be removing support for them after version 7.x.
- SD Card/USB media can still be used as a standalone boot option through all 7.x releases via published Customer Advisory [Usage of SD Card/USB Devices As Standalone Boot Devices Has Changed Due to System Storage Changes For VMware ESXi 7.0 \(Or Later\)](#).
- For any major release beyond VMware ESXi 7.x, VMware will require M.2 or another local persistent device as the standalone boot option.

---

## Additional Options

### HPE USB Keyboard/Mouse Kits

HPE USB CN Keyboard/Mouse Kit	631364-B21
HPE USB KR Keyboard/Mouse Kit	672097-KD3

---

### HPE Support Services

#### Installation & Startup Services

HPE ProLiant DL/ML Install Service	U4554E
HPE ProLiant DL/ML Startup Service	U4555E

#### Tech Care Services

HPE 3 Year Tech Care Essential DL380 Gen11 HW Service	H93G4E
HPE 3 Year Tech Care Essential wDMR DL380 Gen11 HW Service	H93G5E
HPE 5 Year Tech Care Essential DL380 Gen11 HW Service	H93J8E
HPE 5 Year Tech Care Essential wDMR DL380 Gen11 HW Service	H93J9E


**Notes:** For a full listing of support services available for this server, please visit <https://www.hpe.com/services>.

---



## Memory

### Memory Population guidelines

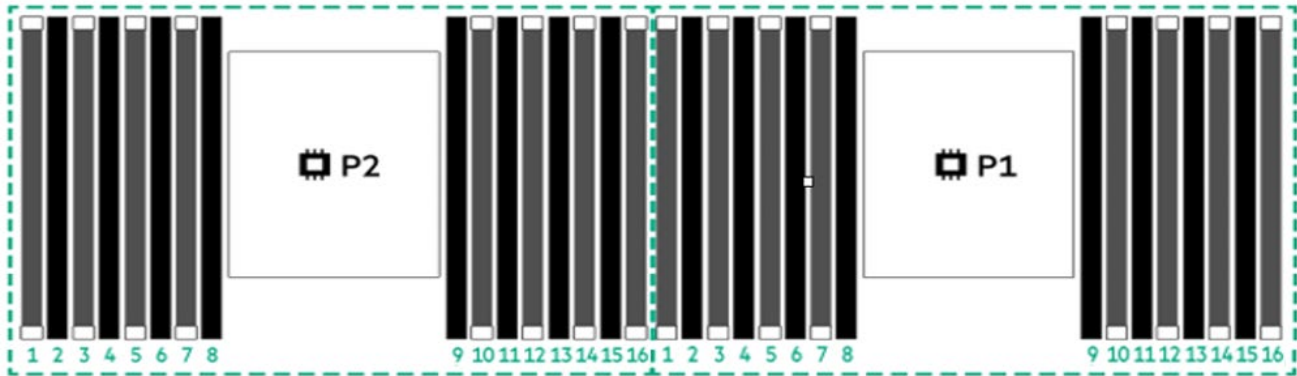

HPE ProLiant DL380 Gen11

HPE ProLiant Gen11 16 slot per CPU DIMM population order																
DIMM population order																
DIMM slot	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1 DIMM										10						
2 DIMMs <sup>2</sup>			3							10						
4 DIMMs <sup>2</sup>			3				7			10				14		
6 DIMMs			3		5		7			10				14		16
8 DIMMs <sup>1,2</sup>	1		3		5		7			10		12		14		16
12 DIMMs	1	2	3		5	6	7			10	11	12		14	15	16
16 DIMMs <sup>1,2</sup>	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

**Notes:**

- Omitted DIMM counts/socket not qualified by Intel.
- <sup>1</sup> Supports SGX (Software Guard Extensions)
- <sup>2</sup> Support Hemi (hemisphere mode).

**General Memory Population Rules and Guidelines:**

- DIMMs should be installed in quantities of even numbers.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- Mixing of x4 and x8 memory is not allowed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, and the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit: **Server memory populations rules for HPE Gen11 servers with 4th Gen Intel Xeon Scalable processors**
- To realize the performance memory capabilities listed in this document, HPE DDR5 Smart Memory is required.
- For additional information, please see the **HPE DDR5 Smart Memory QuickSpecs**.



## Memory

HPE SKU P/N	P43322-B21	P43328-B21	P43331-B21
<b>SKU Description</b>	HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit
<b>DIMM Capacity</b>	16GB	32GB	64GB
<b>DIMM Rank</b>	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)
<b>Voltage</b>	1.1 V	1.1 V	1.1 V
<b>DRAM Depth [bit]</b>	2G	2G	4G
<b>DRAM Width [bit]</b>	x8	x8	x4
<b>DRAM Density</b>	16Gb	16Gb	16Gb
<b>CAS Latency</b>	40-39-39	40-39-39	40-39-39
<b>DIMM Native Speed</b>	4800 MT/s	4800 MT/s	4800 MT/s

HPE SKU P/N	P43334-B21	P43337-B21
<b>SKU Description</b>	HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit
<b>DIMM Capacity</b>	128GB	256GB
<b>DIMM Rank</b>	Quad Rank (4R)	Octal Rank (8R)
<b>Voltage</b>	1.1 V	1.1 V
<b>DRAM Depth [bit]</b>	4G	4G
<b>DRAM Width [bit]</b>	x4	x4
<b>DRAM Density</b>	16Gb	16Gb
<b>CAS Latency</b>	40-39-39	40-39-39
<b>DIMM Native Speed</b>	4800 MT/s	4800 MT/s

**Notes:** The maximum memory speed is a function of the memory type, memory configuration, and processor model.

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

### DDR5 memory options part number decoder

**Notes:**


- Capacity references are rounded to the common gigabyte (GB) values.
  - o 8GB = 8,192 MB
  - o 16GB = 16,384 MB
  - o 32GB = 32,768 MB
  - o 64GB = 65,536 MB
  - o 96GB = 98,304 MB
  - o 128GB = 131,072 MB
  - o 256GB = 262,144 MB
  - o 512GB = 524,288 MB

For more information on memory, please see the Memory QuickSpecs: [HPE DDR5 Smart Memory](#)


### Memory Speed Table for HPE ProLiantDL380 Gen Gen11

For details on the HPE Server Memory speed, please visit: <https://www.hpe.com/docs/server-memory>

# Storage

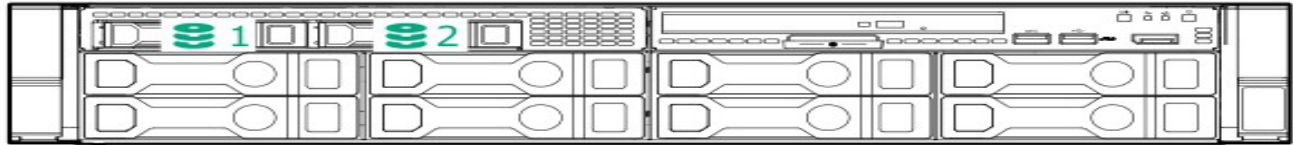



8LFF chassis with Universal media bay and optional 2SFF and optical drive shown

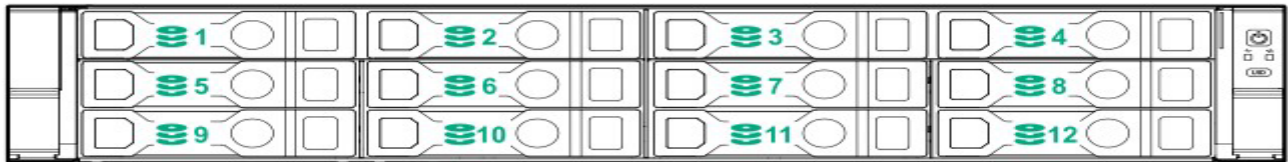

12LFF chassis



24SFF + rear 2 SFF drives

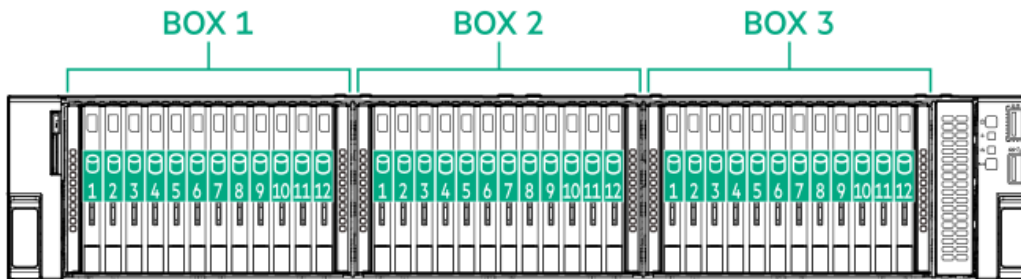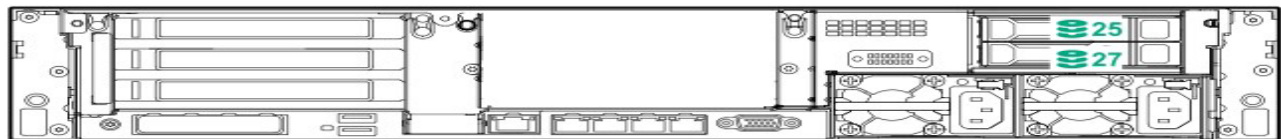

12EDSFF chassis



## Technical Specifications

### System Unit

#### Dimensions

- **SFF CTO servers:**  
8.75 x 44.8 x 72.7 cm / 3.44 x 17.64 x 28.62 in
- **LFF CTO servers:**  
8.75 x 44.8 x 73.25 cm / 3.44 x 17.64 x 28.84 in

#### Weight (approximate)

- **Maximum:** 8 SFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x RAID controller, 2x Risers installed
  - **Maximum:** 33kg/72.75 lbs.
  - **Minimum:** 16kg/35.27 lbs.
- **Maximum:** 12LFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x RAID controller, 2x Risers installed
  - **Maximum:** 37kg/81.57 lbs.
  - **Minimum:** 18kg/39.68 lbs.

---

#### Input Requirements (per power supply)

##### Rated Line Voltage

- For 1800W-2200W (Titanium) Power Supply: 200-240 VAC
- For 1600W (Platinum) Power Supply: 200-240 VAC
- For 1000W (Titanium): 100 to 240 VAC
- For 800W (Titanium) Power Supply: 200-240 VAC
- For 800W (Platinum) Power Supply: 100-240 VAC
- For 800W (Universal) Power Supply: 200-277 VAC

---

#### BTU Rating

##### Maximum

- For 1800W-2200W Power Supply: 6497 BTU/hr. (at 200 VAC), 6868 BTU/hr. (at 208 VAC), 7230 BTU/hr. (at 220 VAC), 7596 BTU/hr. (at 230VAC), 7962 BTU/hr. (at 240VAC)
- For 1600W Power Supply: 5918 BTU/hr. (at 200 VAC), 5888 BTU/hr. (at 220 VAC), 5884 BTU/hr. (at 240 VAC)
- For 1000W (Titanium) Power Supply: 3741 BTU/hr. (at 100 VAC), 3596 BTU/hr. (at 200 VAC), 3582 BTU/hr. (at 240 VAC)
- For 800W (Titanium) Power Supply: 2905 BTU/hr. (at 200 VAC), 2899 BTU/hr. (at 220 VAC), 2893 BTU/hr. (at 240 VAC)
- For 800W (Platinum) Power Supply: 3067 BTU/hr. (at 100 VAC), 2958 BTU/hr. (at 200 VAC), 2949 BTU/hr. (at 240 VAC)
- For 800W (Universal) Power Supply: 2964 BTU/hr. (at 200 VAC), 2951 BTU/hr. (at 230 VAC), 2936 BTU/hr. (at 277 VAC)

---

#### Relative Humidity (non-condensing)

- **Operating**  
8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.
- **Non-operating**  
5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.



## Technical Specifications

### Power Supply Output

(per power supply)

#### Rated Steady-State Power

- For 1800W-2200W Power Supply: 1800W (at 200 VAC), 1900W (at 208 VAC), 2000W (at 220 VAC), 2100W (at 230VAC), 2200W (at 240VAC)
- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 1000W (Titanium) Power Supply: 1097W (at 100 VAC), 1000W (at 240 VAC), 1000W (at 240 VDC) input for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)

#### Maximum Peak Power

- For 1800W-2200W Power Supply: 1800W (at 200 VAC), 1900W (at 208 VAC), 2000W (at 220 VAC), 2100W (at 230VAC), 2200W (at 240VAC)
- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 1000W (Titanium) Power Supply: 1000W (at 100 VAC), 1000W (at 240 VAC), 1000W (at 240 VDC) input for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)

---

### System Inlet Temperature

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft.) above sea level to a maximum of 3050 m (10,000 ft.), no direct sustained sunlight. Maximum rate of change is 20°C/hr. (36°F/hr.). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft.) above 900 m (2953 ft.) to a maximum of 3050 m (10,000 ft.). The approved hardware configurations for this system are listed at the URL: [DL380 Gen11 Extended Ambient Temperature Guidelines](#)

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft.) above 900 m (2953 ft.) to a maximum of 3050 m (10,000 ft.). The approved hardware configurations for this system are listed at the URL:

[DL380 Gen11 Extended Ambient Temperature Guidelines](#)

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr. (36°F/hr.).

---

## Technical Specifications

### Altitude

- **Operating**  
3050 m (10,000 ft.). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft./min).
- **Non-operating**  
9144 m (30,000 ft.). Maximum allowable altitude change rate is 457 m/min (1500 ft./min).

### Acoustic Noise

Listed are the declared A-Weighted sound power levels (LwA,m) and declared average bystander position A-Weighted sound pressure levels (LpA,m) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Acoustic Noise	
<b>Idle</b>	
LwA,m	4.2 B Entry 4.2 B Base 4.2 B Performance
LpAm	28 dBA Entry 27 dBA Base 30 dBA Performance
<b>Operating</b>	
LwA,m	4.2 B Entry 4.2 B Base 4.2 B Performance
LpAm	29 dBA Entry 27 dBA Base 29 dBA Performance
Kv	0.4 B Entry 0.4 B Base 0.4 B Performance

#### Notes:

- The declared mean A-weighted sound power level, LwA,m, is computed as the arithmetic average of the measured.
- A-weighted sound power levels for a randomly selected sample, rounded to the nearest 0,1 B.
- The declared mean A-weighted emission sound pressure level, LpA,m, is computed as the arithmetic average of the measured A-weighted emission sound pressure levels at the bystander positions for a randomly selected sample, rounded to the nearest 1 dB.
- The statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power level, LwA,m, such that there will be a 95 % probability of acceptance, when using the verification procedures of ISO 9296, if no more than 6,5 % of the batch of new equipment, has A-weighted sound power levels greater than (LwA,m + Kv).
- The quantity, LwA,c (formerly called LwAd), can be computed from the sum of LwA,m and Kv.
- All measurements made to conform to ISO 7779 / ECMA-74 and declared to conform to ISO 9296 / ECMA-109.
- B, dB, abbreviations for bels and decibels, respectively, where 1 B = 10 dB.
- The results in this declaration apply only to the model numbers listed above when operating and tested according to the indicated modes and standards. A system with additional configuration components or increased operating functionality may increase the noise emission values.
- System under abnormal conditions may increase the noise level, persons in the vicinity of the product [cabinet] for extended periods of time should consider wearing hearing protection or using other means to reduce noise exposure.

## Technical Specifications

### Emissions Classification (EMC) – Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

---

### Environment-friendly Products and Approach End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

---




## Summary of Changes

Date	Version History	Action	Description of Change
06-Jan-2025	Version 29	Changed	Overview, Core Options and Storage sections were updated.
02-Dec-2024	Version 28	Changed	Core Options and Additional Options sections were updated. (Removed OBS items: HDDs, SSDs, iLO Licenses, and Mouse/Keyboard options).
04-Nov-2024	Version 27	Changed	Standard Features, Configuration Information and Additional Options sections were updated.
07-Oct-2024	Version 26	Changed	Standard Features, Core Options and Additional Options sections were updated.
03-Sep-2024	Version 25	Changed	Standard Features (Operating Systems and Virtualization Software Support for HPE Servers) and Pre-Configured Models sections were updated.
05-Aug-2024	Version 24	Changed	Standard Features, Core Options and Additional Options sections were updated.
15-Jul-2024	Version 23	Changed	Pre-Configured Models section was updated.
01-Jul-2024	Version 22	Changed	Standard Features, Core Options and Additional Options sections were updated.
17-Jun-2024	Version 21	Changed	Pre-Configured Models section was updated.
03-Jun-2024	Version 20	Changed	Standard Features, Configuration Information, Core Options, Additional Options and Technical Specifications sections were updated.
29-Apr-2024	Version 19	Changed	Core Options section was updated.
15-Apr-2024	Version 18	Changed	Pre-Configured Models section was updated.
01-Apr-2024	Version 17	Changed	Standard Features, Pre-Configured Models, Configuration Information, Core Options and Additional Options sections were updated.
18-Mar-2024	Version 16	Changed	Pre- Configured Models section was updated.
04-Mar-2024	Version 15	Changed	Configuration Information and Core Options sections were updated
05-Feb-2024	Version 14	Changed	Overview, Standard Features, Configuration Information, Core Options and Technical Specifications sections were updated
14-Dec-2023	Version 13	Changed	Overview, Configuration Information and Additional Options sections were updated
06-Nov-2023	Version 12	Changed	Overview, Configuration Information and Additional Options sections were updated
02-Oct-2023	Version 11	Changed	Overview, Configuration Information and Additional Options sections were updated
11-Sep-2023	Version 10	Changed	Standard Features section was updated
05-Sep-2023	Version 9	Changed	Overview, Standard Features, Configuration Information, Core Options and Memory sections were updated
24-Jul-2023	Version 8	Changed	Standard Features section was updated
10-Jul-2023	Version 7	Changed	Overview, Standard Features, Pre- Configured Models, Configuration Information and Core Options sections were updated
05-Jun-2023	Version 6	Changed	Overview, Standard Features, Pre- Configured Models, Configuration Information and Core Options sections were updated
01-May-2023	Version 5	Changed	Standard Features, Configuration Information, Core Options and Technical Specifications sections were updated.
03-Apr-2023	Version 4	Changed	Standard Features, Pre- Configured Models, Configuration Information, Core Options and Technical Specifications sections were updated.
06-Mar-2023	Version 3	Changed	Standard Features and Core Options sections were updated.
15-Feb-2023	Version 2	Changed	Standard Features section was updated
10-Jan-2023	Version 1	New	New QuickSpecs



## Copyright

**Make the right purchase decision.  
Contact our presales specialists.**



---

© Copyright 2025 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.  
For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a50004307enw - 16911 - Worldwide - V29 - 06-January-2025