

Dell Pro 3 14

P314260

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Views of Dell Pro 3 14 P314260.....	5
Right view.....	5
Left view.....	5
Top view.....	6
Front view.....	7
Bottom view.....	8
Locate the Service Tag or Express Service Code label of your computer.....	9
Chapter 2: Set up your Dell Pro 3 14 P314260.....	10
Chapter 3: Specifications of Dell Pro 3 14 P314260.....	12
Dimensions and weight.....	12
Processor.....	12
Intel Core Ultra Series 3 processors.....	12
Intel Core Series 3 processors.....	13
Chipset.....	15
Operating system.....	15
Memory.....	15
External ports and slots.....	16
Internal slots.....	16
Ethernet.....	17
WLAN module.....	17
WWAN module.....	18
Audio.....	19
Storage.....	20
Keyboard.....	20
Keyboard shortcuts.....	20
Camera.....	22
Touchpad.....	22
Power adapter.....	23
Power adapter requirements.....	23
Battery.....	24
Power requirements(for computers shipped with 3-cell, 45 Wh battery).....	25
Power requirements(for computers shipped with 3-cell, 57 Wh battery).....	25
Power requirements(for computers shipped with 3-cell, 70 Wh battery).....	26
Battery-charge status light.....	26
Display.....	27
ComfortView Plus.....	27
Fingerprint reader.....	28
GPU—Integrated.....	28
Multiple displays, port and resolution matrix.....	28
Hardware security.....	29
Operating and storage environment.....	30
Using the privacy shutter.....	30

Dell Optimizer.....	31
Dell support policy.....	31
Chapter 4: Getting help and contacting Dell.....	32
Chapter 5: Revision history.....	33

Views of Dell Pro 3 14 P314260

Right view



Figure 1. Right view

1. Nano-SIM card slot (optional)

Install a nano-SIM card to connect to a mobile broadband network.

NOTE: The nano-SIM card slot is only available on computers shipped with a WLAN card.

2. Global headset jack

Supports connection of headphones or combo headsets with integrated microphone for audio input and output.

3. USB 3.2 Gen 1 port with PowerShare

Supports data transfer speed of up to 5 Gbps for connecting external storage and peripheral devices, and provides power output capability for charging compatible devices even when the computer is turned off.

NOTE: If your computer is turned off or in a hibernate state, you must connect the power adapter to charge your devices using the PowerShare port. You must enable this feature in the BIOS setup program.

4. RJ45 ethernet (1 Gbps) port

Provides wired network connectivity by connecting to a router or modem via an Ethernet cable. Supports data transfer speeds up to 1 Gbps for stable and high-speed internet or LAN access.

5. Wedge-shaped lock slot

Provides a slot for a cable lock to secure the computer against unauthorized removal or movement.

Left view



Figure 2. Left view

1. HDMI 2.1 (TMDS) port

Outputs high-definition video and audio to external displays, TVs, or HDMI-in devices. Supports resolutions up to 4096 x 2160 at 60 Hz with HDCP 2.3 for secure content playback, enabling users to extend or mirror their display for entertainment, presentations, or multi-screen setups.

2. USB 3.2 Gen 1 (5 Gbps) port

Supports data transfer speed of up to 5 Gbps for connecting external storage and peripheral devices.

3. Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort 2.1: Transfers data at high speed, charges your device, and connects to external displays—all through one port:

- **Thunderbolt 4:** Offer up to 40 Gbps data transfer speed, enabling ultrafast file transfers, external SSDs, and high-performance peripherals. Offers backward compatibility with USB 3.2, USB 2.0, and Thunderbolt 3.
- **DisplayPort 2.1:** Allows video output to external monitors, making it ideal for docking stations or multi-monitor setups. Compatible with USB-C to HDMI/DP adapters and docking stations.
- **USB4 Compatibility:** Ensures broad support for USB devices with efficient bandwidth sharing and backward compatibility with USB 3.2, USB 2.0, and Thunderbolt 3.
- **Power Delivery (PD):** Supports charging of laptops, tablets, and other devices with up to 100 W power through the same port, reducing the need for separate power adapters.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

4. Battery-status light

Indicates the current battery charge level and charging status through LED signals, helping users monitor power availability and charging progress.

- White-Battery is charging.
- Solid yellow-Battery charge is low.
- Blinking yellow-Battery charge is critical.
- Off—Battery is fully charged.

Top view



Figure 3. Top view

1. Power button with optional fingerprint reader

Provides standard power control. If equipped with a fingerprint reader, it also supports secure user authentication via a single touch.

NOTE: When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 10 seconds to force shut-down the computer.

NOTE: The power-status light on the power button is available only on computers without the fingerprint reader. Computers that are shipped with the fingerprint reader that is integrated on the power button will not have the power-status light on the power button.

NOTE: The power-button behavior can be customized in the operating system.

2. Touchpad

Used to move the mouse pointer. You can tap, swipe, or drag your finger to click, scroll, or move items on the screen—just like using a mouse.

Front view



Figure 4. Front view

1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. IR Sensor (optional)

The sensor detects the absence of the user and locks the computer for securing the computer and reducing power consumption.

3. Infrared emitter (optional)

The infrared emitter emits infrared light, which enables the infrared camera to sense and track motion.

4. **Camera shutter**

Features a manual privacy shutter that can slide to access the camera lens and slide over to block its view and safeguard your privacy when the camera is not in use.

5. **Camera**

Allow you to conduct video calls, capture still images, and record video content for communication and documentation purposes.

6. **Camera-status light**

Illuminates automatically to indicate active camera usage, letting you know when the camera is recording or streaming.

7. **Right microphone**

Provides digital sound input for audio recording and voice calls.

Bottom view

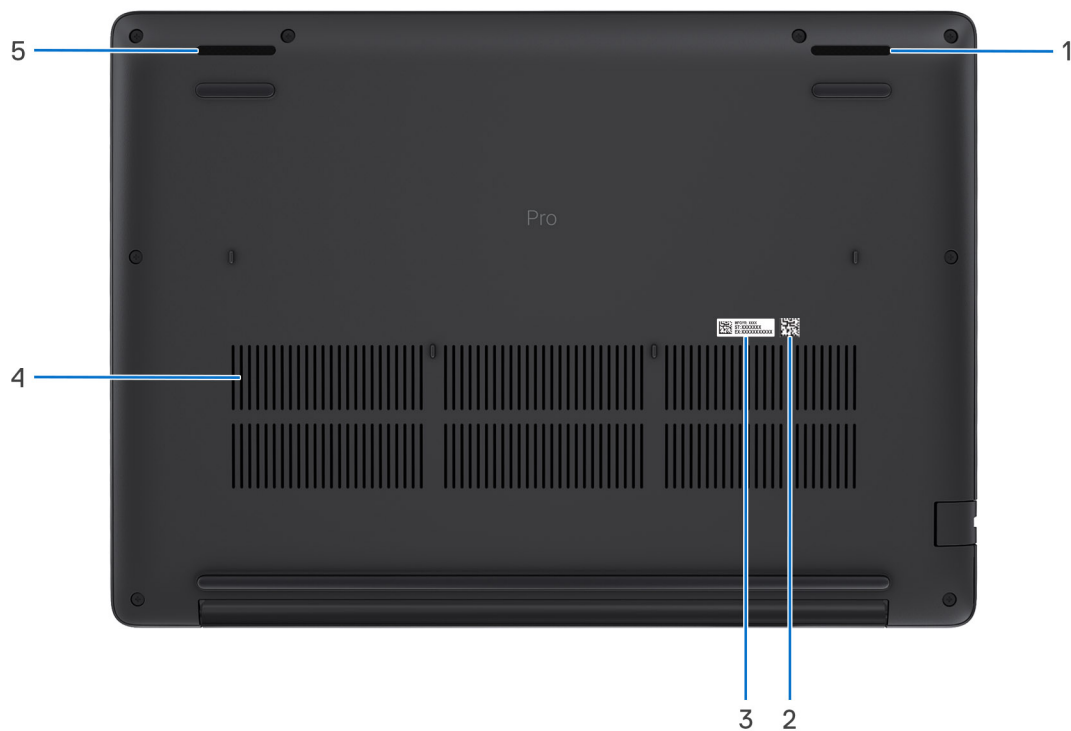


Figure 5. Bottom view

1. **Right speaker**

Provide audio output.

2. **MyDell QR code**

MyDell is your hub for content that is personalized to your Dell Pro 3 14 P314260, including videos, articles, manuals, and access to support.

3. **Service Tag label**

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

4. **Air vents**

Provides ventilation for your computer. Clogged air vents can cause overheating and can affect the performance of your computer and potentially cause hardware issues. Keep the air vents clear of obstructions and clean them regularly to prevent the build-up of dust and dirt. For more information about cleaning air vents, search [Dell Support site](#).

5. Left speaker

Provide audio output.

Locate the Service Tag or Express Service Code label of your computer

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search [Dell Support Site](#).



Figure 6. Service Tag/Express Service Code location

Set up your Dell Pro 3 14 P314260

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter and press the power button.

NOTE: To conserve battery power, the battery might enter power-saving mode. Ensure that the power adapter is connected before turning on the computer.



Figure 7. Connect the power adapter and press the power button

2. Finish the operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search [Dell Support Site](#).

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, it is recommended that you:


- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with an existing Microsoft account or create an account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu. This step is optional but recommended.

Table 1. Locate Dell apps

Resources	Description
	Dell Optimizer is an application that is designed to enhance computer performance and productivity by optimizing settings for power, battery, display, collaboration touchpad, and presence detection. It also provides access to applications purchased with your new computer. For more information, see Dell Optimizer User's Guide at Dell Support Site.
	Dell Product Registration Register your computer with Dell.
	Dell Help & Support Access help and support for your computer.
	SupportAssist SupportAssist is a proactive and predictive technology that offers automated technical support for Dell computers. It proactively monitors both hardware and software, addressing performance issues, preventing security threats, and automating engagement with Dell Technical Support. For more information, see the SupportAssist documentation at Dell Support Site.  NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.

Specifications of Dell Pro 3 14 P314260

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell Pro 3 14 P314260.

Table 2. Dimensions and weight

Description	Values
Front height	11.30 mm (0.45 in.)
Rear height	15.47 mm (0.61 in.)
Width	315.50 mm (12.42 in.)
Depth	226 mm (8.90 in.)
Weight  NOTE: The weight of your computer depends on the configuration that you ordered.	1.31 kg (2.89 lb)

Processor

Intel Core Ultra Series 3 processors

The following table lists the details of the Intel Core Ultra Series 3 processors that are supported on your Dell Pro 3 14 P314260.

 **NOTE:** The following processor specifications tables only apply to computers shipped with Intel Core Ultra Series 3 processors.

Table 3. Intel Core Ultra Series 3 processors

Description	Option one	Option two	Option three	Option four	Option five
Type	Intel Core Ultra 5 332 vPro	Intel Core Ultra 5 335 vPro	Intel Core Ultra 7 355	Intel Core Ultra 7 365 vPro	Intel Core Ultra 5 336H vPro
Optimized mode (TDP)	18W	18W	18W	18W	18W
Performance mode (TDP)	23W	23W	23W	23W	23W
 NOTE: Thermal Design Power (TDP) is an indicator of maximum performance at sustained workloads under Performance Mode at an ambient temperature of 28 °C (82.40 °F).					
Total cores	6	8	8	8	12
Number of Performance-cores	2	4	4	4	4
Number of Efficient-cores	None	None	None	None	4

Table 3. Intel Core Ultra Series 3 processors (continued)

Description	Option one	Option two	Option three	Option four	Option five
Number of Low Power Efficient-cores	4	4	4	4	4
Total threads	6	8	8	8	12
Speed	Up to 4.4 GHz	Up to 4.6 GHz	Up to 4.7 GHz	Up to 4.8 GHz	Up to 4.6 GHz
Performance-core frequency					
Base frequency	2.5 GHz	2.2 GHz	2.3 GHz	2.4 GHz	1.9 GHz
Maximum turbo frequency	4.4 GHz	4.6 GHz	4.7 GHz	4.8 GHz	4.6 GHz
Efficient-core frequency					
Base frequency	1.9 GHz	1.6 GHz	1.7 GHz	1.8 GHz	1.5 GHz
Maximum turbo frequency	Not applicable	Not applicable	Not applicable	Not applicable	3.4 GHz
Low Power Efficient-core frequency					
Base frequency	1.9 GHz	1.6 GHz	1.7 GHz	1.8 GHz	1.5 GHz
Maximum turbo frequency	3.3 GHz	3.4 GHz	3.5 GHz	3.6 GHz	3.2 GHz
Processor cache	12 MB	12 MB	12 MB	12 MB	18 MB
Integrated graphics	Intel Graphics	Intel Graphics	Intel Graphics	Intel Graphics	Intel Graphics
X ^e -cores	2	4	1	2	2
GPU AI performance	Up to 18 TOPS	Up to 40 TOPS	Up to 40 TOPS	Up to 40 TOPS	Up to 37 TOPS
Neural Processing Unit (NPU) AI performance	Up to 46 TOPS	Up to 47 TOPS	Up to 49 TOPS	Up to 49 TOPS	Up to 47 TOPS
 NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.					

Intel Core Series 3 processors

The following table lists the details of the Intel Core Series 3 processors that are supported on your Dell Pro 3 14 P314260.

 **NOTE:** The following processor specifications tables only apply to computers shipped with Intel Core Series 3 processors.

Table 4. Intel Core Series 3 processors

Description	Option one	Option two	Option three
Type	Intel Core 3 304	Intel Core 5 315	Intel Core 5 320
Optimised mode (TDP)	15 W	15 W	15 W
Performance mode (TDP)	19 W	19 W	19 W
 NOTE: Thermal Design Power (TDP) is an indicator of maximum performance at sustained workloads under Performance Mode at an ambient temperature of 28 °C (82.40 °F).			

Table 4. Intel Core Series 3 processors (continued)

Description	Option one	Option two	Option three
Total cores	5	6	6
Number of Performance-cores	1	2	2
Number of Efficient-cores	None	None	None
Number of Low Power Efficient-cores	4	4	4
Total threads	5	6	6
Speed	Up to 4.3 GHz	Up to 4.4 GHz	Up to 4.6 GHz
Performance-core frequency			
Base frequency	1.5 GHz	1.5 GHz	1.5 GHz
Maximum turbo frequency	4.3 GHz	4.4 GHz	4.6 GHz
Low Power Efficient-core frequency			
Base frequency	1.4 GHz	1.4 GHz	1.4 GHz
Maximum turbo frequency	3.3 GHz	3.3 GHz	3.4 GHz
Processor cache	6 MB	6 MB	6 MB
Integrated graphics	Intel Graphics	Intel Graphics	Intel Graphics
X ^e -cores	1	2	2
GPU AI performance	Up to 9 TOPS	Up to 18 TOPS	Up to 20 TOPS
Neural Processing Unit (NPU) AI performance	Up to 15 TOPS	Up to 15 TOPS	Up to 16 TOPS
 NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.			

Table 4. Intel Core Series 3 processors

Description	Option four	Option five	Option six
Type	Intel Core 5 330	Intel Core 7 350	Intel Core 7 360
Optimised mode (TDP)	15 W	15 W	15 W
Performance mode (TDP)	19 W	19 W	19 W
 NOTE: Thermal Design Power (TDP) is an indicator of maximum performance at sustained workloads under Performance Mode at an ambient temperature of 28 °C (82.40 °F).			
Total cores	6	6	6
Number of Performance-cores	2	2	2
Number of Efficient-cores	None	None	None
Number of Low Power Efficient-cores	4	4	4
Total threads	6	6	6
Speed	Up to 4.6 GHz	Up to 4.8 GHz	Up to 4.8 GHz
Performance-core frequency			
Base frequency	1.5 GHz	1.5 GHz	1.5 GHz
Maximum turbo frequency	4.6 GHz	4.8 GHz	4.8 GHz

Table 4. Intel Core Series 3 processors (continued)

Description	Option four	Option five	Option six
Low Power Efficient-core frequency			
Base frequency	1.4 GHz	1.4 GHz	1.4 GHz
Maximum turbo frequency	3.4 GHz	3.6 GHz	3.6 GHz
Processor cache	6 MB	6 MB	6 MB
Integrated graphics	Intel Graphics	Intel Graphics	Intel Graphics
X ^e -cores	2	2	2
GPU AI performance	Up to 20 TOPS	Up to 21 TOPS	Up to 21 TOPS
Neural Processing Unit (NPU) AI performance	Up to 16 TOPS	Up to 17 TOPS	Up to 17 TOPS
 NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.			

Chipset

The following table lists the details of the chipset that is supported by your Dell Pro 3 14 P314260.

Table 5. Chipset

Description	Option one	Option two
Processors	Intel Core Ultra Series 3	Intel Core Series 3
Chipset	Integrated with the processor	Integrated with the processor
DRAM bus width	64-bit	64-bit
Flash EPROM	16 MB + 32 MB	8 MB + 32 MB
PCIe bus	Up to Gen5	Up to Gen4

Operating system

Your Dell Pro 3 14 P314260 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Windows 11 Pro National Education
- Ubuntu Linux 24.04 LTS

Memory

The following table lists the memory specifications that are supported by your Dell Pro 3 14 P314260.

Table 6. Memory specifications

Description	Option one	Option two
Memory slots	Two SODIMM slots	One SODIMM slot
Memory type	DDR5	DDR5

Table 6. Memory specifications (continued)

Description	Option one	Option two
Memory speed	5600 MT/s	5600 MT/s
Maximum memory configuration	64 GB	48 GB
Minimum memory configuration	16 GB	8 GB
Memory size per slot	16 GB, 32 GB or 64GB	8 GB, 16 GB, 32 GB, or 48 GB
Memory configurations supported	16 GB: 1 x 16 GB, DDR5, 5600 MT/s, single-channel 16 GB: 2 x 8 GB, DDR5, 5600 MT/s, dual-channel 32 GB: 1 x 32 GB, DDR5, 5600 MT/s, single-channel 32 GB: 2 x 16 GB, DDR5, 5600 MT/s, dual-channel 64 GB: 2 x 32 GB, DDR5, 5600 MT/s, dual-channel	8 GB: 1 x 8 GB, DDR5, 5600 MT/s, single-channel 16 GB: 1 x 16 GB, DDR5, 5600 MT/s, single-channel 32 GB: 1 x 32 GB, DDR5, 5600 MT/s, single-channel 48 GB: 1 x 48 GB, DDR5, 5600 MT/s, single-channel

External ports and slots

The following table lists the external ports and slots on your Dell Pro 3 14 P314260.

Table 7. External ports and slots

Description	Values
Network port	One RJ45 ethernet port (1 Gbps)
USB ports	- Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort 2.1 - One USB 3.2 Gen 1 port (5 Gbps) - One USB 3.2 Gen 1 port (5 Gbps) with PowerShare
Audio port	One global headset jack
Video port(s)	One HDMI 2.1 port
Power-adaptor port	Two Type-C Thunderbolt 4 (40 Gbps) with Power Delivery and DisplayPort 2.1
Security-cable slot	One wedge-shaped lock slot
SIM-card slot	One nano-SIM card slot (optional)

Internal slots

The following table lists the internal slots of your Dell Pro 3 14 P314260.

Table 8. Internal slots

Description	Values
M.2	- One M.2 Key-E 2230 slot for WLAN card - One M.2 Key-B 3042/3052 slot for WWAN card (optional) - One M.2 Key-M 2230 slot for solid-state drive

Table 8. Internal slots

Description	Values
	 NOTE: To learn more about the features of different types of M.2 cards, search Dell Support Site .

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Dell Pro 3 14 P314260.

Table 9. Ethernet specifications

Description	Values
Model	Intel I219-LM
Transfer rate	10/100/1000 Mbps

WLAN module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Dell Pro 3 14 P314260.

Table 10. Wireless module specifications

Description	Option one	Option two	Option three	Option four
Model number	Intel BE211	Intel BE213	Intel AX211	MediaTek MT7920
Transfer rate	Up to 5760 Mbps	Up to 2880 Mbps	Up to 2400 Mbps	Up to 1200 Mbps
Frequency bands supported	2.4 GHz 5 GHz 6 GHz	2.4 GHz 5 GHz 6 GHz	2.4 GHz 5 GHz 6 GHz	2.4 GHz 5 GHz
Wireless standards	- Wi-Fi 802.11a/b/g - Wi-Fi 4 (Wi-Fi 802.11n) - Wi-Fi 5 (Wi-Fi 802.11ac) - Wi-Fi 6 (Wi-Fi 802.11ax) - Wi-Fi 7 (Wi-Fi 802.11be)	- Wi-Fi 802.11a/b/g - Wi-Fi 4 (Wi-Fi 802.11n) - Wi-Fi 5 (Wi-Fi 802.11ac) - Wi-Fi 6 (Wi-Fi 802.11ax) - Wi-Fi 7 (Wi-Fi 802.11be)	- Wi-Fi 802.11a/b/g - Wi-Fi 4 (Wi-Fi 802.11n) - Wi-Fi 5 (Wi-Fi 802.11ac) - Wi-Fi 6 (Wi-Fi 802.11ax)	- Wi-Fi 802.11a/b/g - Wi-Fi 4 (Wi-Fi 802.11n) - Wi-Fi 5 (Wi-Fi 802.11ac) - Wi-Fi 6 (Wi-Fi 802.11ax)
Encryption	64-bit/128-bit WEP - AES-CCMP - TKIP	64-bit/128-bit WEP - AES-CCMP - TKIP	64-bit/128-bit WEP - AES-CCMP - TKIP	64-bit/128-bit WEP - AES-CCMP - TKIP
Bluetooth Core Specification	Bluetooth Core 6.0	Bluetooth Core 6.0	Bluetooth core 6.0	Bluetooth Core 6.0
 NOTE: These wireless cards are qualified against the listed Bluetooth Core specifications.				

WWAN module

The following table lists the Wireless Wide Area Network (WWAN) modules that are supported in your Dell Pro 3 14 P314260.

NOTE: WWAN support is available only on certain configurations and in certain regions.

NOTE: Availability of the eSIM feature on the WWAN card depends on your region and mobile carrier's requirements.

NOTE: For instructions on how to setup SIM or eSIM connections on your computer, see the [SIM/eSIM Setup Guide for Windows](#) available with your product documentation at [Dell Support Site](#).

Table 11. WWAN module specifications

Description	Option one	Option two
Model number	DW5826e-m Qualcomm Snapdragon SDX12 Global LTE-Advanced	DW5933e-m, MediaTek T700 Global 5G Modem
Cellular standards	4G	5G
Form factor	M.2 3042 Key-B	M.2 3052 Key-B
Host interface	- USB 3.0 - USB 2.0	PCIe Gen3
Network standard	- LTE FDD/TDD - WCDMA - GPS/GLONASS/Galileo/BDS/QZSS	- NR FR1 (Sub6) FDD/TDD - LTE FDD/TDD - WCDMA/HSPA+ - GPS/GLONASS/Galileo/BDS/QZSS
Transfer data rate	LTE: Download: 600 Mbps (CAT12) Upload: 150 Mbps (CAT13) WCDMA: Download: 42 Mbps Upload: 5.76 Mbps UMTS: Download: 384 kbps Upload: 384 kbps	SA: Download: 4.67 Gbps Upload: 1.25 Gbps NSA: Download: 3.74 Gbps Upload: 835 Mbps LTE: Download: 1.6 Gbps (CAT19) Upload: 211 Mbps UMTS: Download: 384 kbps Upload: 384 kbps Download: DC-HSPA+: 42 Mbps (CAT24) Upload: 11.5 Mbps (CAT7)
Operating frequency bands	- LTE FDD (B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B18, B19, B20, B25, B26, B28, B29, B32, B66, B71) - LTE TDD (B38, B39, B40, B41, B42, B43, B48) - WCDMA (B1, B2, B4, B5, B6, B8, B9, B19)	- NR (n1, n2, n3, n5, n7, n8, n12, n14, n20, n25, n26, n28, n30, n38, n40, n41, n48, n66, n71, n77, n78, n79) - LTE (B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B48, B66, B71) - WCDMA/HSPA+ (1, 2, 4, 5, 8)
Power supply	DC 3.135 V to 4.4 V, Typical: 3.3 V	DC 3.135 V to 4.4 V, Typical: 3.3 V

Table 11. WWAN module specifications (continued)

Description	Option one	Option two
SIM card	Supported through external SIM slot	Supported through external SIM slot
eSIM with dual SIM (DSSA)	Supported (The availability of eSIM functionality embedded on the module is dependent on the region and specific carrier requirements)	Supported (The availability of eSIM functionality embedded on the module is dependent on the region and specific carrier requirements)
Antenna diversity	Supported	Supported
Radio on/off	Supported	Supported
Wake on wireless	Supported	Supported
Temperature	- Normal operating temperature: -30°C to 70°C (-22°F to 158°F) - Extended operating temperature: -40°C to 85°C (-40°F to 185°F) - Storage temperature: -40°C to 85°C (-40°F to 185°F)	- Normal operating temperature: -10°C to 55°C (14°F to 131°F) - Extended operating temperature: -40°C to 85°C (-40°F to 185°F) - Storage temperature: -60°C to 100°C (-76°F to 212°F)
Antenna connector	- WWAN Main Antenna × 1 - WWAN Diversity Antenna × 1	- WWAN Main Antenna × 1 - WWAN Diversity Antenna × 1 4 × 4 MIMO Antenna × 2
 NOTE: For instructions to find your computer's International Mobile Equipment Identity (IMEI) number, search in the Knowledge Base Resource at Dell Support Site .		

Audio

The following table lists the audio specifications of your Dell Pro 3 14 P314260.

Table 12. Audio specifications

Description	Values
Audio controller	Realtek ALC3329B
Stereo conversion	Supported with SoundReal
Internal audio interface	High definition audio Interface
External audio interface	Global headset jack
Number of speakers	2
Internal-speaker amplifier	Supported (audio codec integrated)
External volume controls	Keyboard shortcut controls
Speaker output:	
Average	2 W x 2 = 4 W
Peak	2.5 W x 2 = 5 W
Microphone	Digital-array microphones in camera assembly

Storage

This section lists the storage options on your Dell Pro 3 14 P314260.
Your Dell Pro 3 14 P314260 supports one M.2 2230 solid-state drive.

Table 13. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid state drive, TLC	PCIe Gen4 x4 NVMe, up to 64 GT/s	Up to 1 TB
M.2 2230 solid state drive, QLC	PCIe Gen4 x4 NVMe, up to 64 GT/s	Up to 2 TB

Keyboard

The following table lists the keyboard specifications of your Dell Pro 3 14 P314260.

Table 14. Keyboard specifications

Description	Values
Keyboard type	- Standard non-backlit keyboard - Standard backlit keyboard
Keyboard layout	- Belgian,French European: AZERTY - Others: QWERTY
Number of keys	- United States and Canada: 79 keys - United Kingdom: 80 keys - Portuguese (Brazil), French Canadian (Quebec): 81 keys - Japan: 83 keys
Key pitch	Horizontal = 19.05 mm Vertical = 18.05 mm
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. - To type the alternate character, press Shift and the desired key. - To perform secondary functions, press Fn and the desired key. NOTE: You can define the primary behavior of the function keys (F1–F12) by changing Function Key Behavior in the BIOS Setup program. NOTE: If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, search Dell Support site.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **Fn + Esc**. Subsequently, multimedia control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

 **NOTE:** You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 15. List of keyboard shortcuts

Function key	Behavior
F1	Mute or unmute audio
F2	Decrease volume
F3	Increase volume
F4	Mute or unmute microphone
F5	• ROW : Dictation • German : Co-pilot  NOTE: Depending on the keyboard language, the behaviour of the F5 key may vary.
F6	Click keyboard backlight (optional).  NOTE: Non-backlight keyboards have the F10 function key without the backlight icon and do not support the toggle keyboard backlight function.  NOTE: Toggle to cycle the keyboard backlight status through off, low-backlight, and high-backlight.
F8	Decrease display brightness
F9	Increase display brightness
F10	Print screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 16. Secondary behavior

Function key	Behavior
Fn + F1	Operating system behaviour-specific F1 behaviour
Fn + F2	Operating system behaviour-specific F2 behaviour
Fn + F3	Operating system behaviour-specific F3 behaviour
Fn + F4	Operating system behaviour-specific F4 behaviour
Fn + F5	Operating system behaviour-specific F5 behaviour
Fn + F6	Operating system behaviour-specific F6 behaviour
Fn + F7	Operating system behaviour-specific F7 behaviour
Fn + F8	Operating system behaviour-specific F8 behaviour

Table 16. Secondary behavior (continued)

Function key	Behavior
Fn + F9	Operating system behaviour-specific F9 behaviour
Fn + F10	Operating system behaviour-specific F10 behaviour
Fn + F11	Operating system behaviour-specific F11 behaviour
Fn + F12	Operating system behaviour-specific F12 behaviour
Fn + Copilot	Operating system context behaviour
Fn + Esc	Toggle function key lock
Fn + PgUp (Cursor up)	Scroll up the document or page
Fn + PgDn (Cursor down)	Scroll down the document or page

Camera

The following table lists the camera specifications of your Dell Pro 3 14 P314260.

Table 17. Camera specifications

Description	Option one	Option two	Option three
Number of cameras	One	Two	Two
Camera type	HD camera	FHD RGB HDR camera	FHD RGB HDR+IR camera
Camera location	Front, above the display	Front, above the display	Front, above the display
Camera sensor type	CMOS sensor technology	CMOS sensor technology	CMOS sensor technology
Camera resolution:			
Still image	0.92 megapixels	2.07 megapixels	2.07 megapixels
Video	1280 x 720 (HD) at 30 fps	1920 x 1080 (FHD) at 30 fps	1920 x 1080 (FHD) at 30 fps
Infrared camera resolution:			
Still image	Not applicable	Not applicable	0.13 megapixels
Video	Not applicable	Not applicable	360 x 360 at 15 fps
Diagonal viewing angle:			
Camera	75 degrees	83 degrees	83 degrees
Infrared camera	Not applicable	Not applicable	81.3 degrees

Touchpad

The following table lists the touchpad specifications of your Dell Pro 3 14 P314260.

Table 18. Touchpad specifications

Description	Values
Touchpad resolution	>300 DPI
Touchpad dimensions:	
Horizontal	125 mm (4.92 in.)
Vertical	72 mm (2.83 in.)

Table 18. Touchpad specifications (continued)

Description	Values
Touchpad gestures	For more information about the touchpad gestures that are available on: - Windows, search Microsoft Support Site. - Ubuntu, search Ubuntu Support Site.

Power adapter

The following table lists the power adapter specifications of your Dell Pro 3 14 P314260.

Table 19. Power-adapter specifications

Description	Option one	Option two	Option three
Type	65W AC wall mount adapter, USB Type-C, 2-pin	65W AC adapter, USB Type C	105W AC adapter, USB Type C
Power-adapter dimensions:			
Height	31.00 mm (1.22 in.)	26.5 mm (1.04 in.)	26.50 mm (1.04 in.)
Width	41.50 mm (1.63 in.)	60.00 mm (2.36in.)	60.00 mm (2.36 in.)
Depth	48.50 mm (1.91 in.)	96.00 mm (3.77in.)	122.00 mm (4.80 in.)
Input voltage	100 VAC to 240 VAC	100 VAC to 240 VAC	100 VAC to 240 VAC
Input frequency	50 Hz to 60 Hz	50 Hz to 60 Hz	50 Hz to 60 Hz
Input current (maximum)	1.70 A	1.70 A	1.70 A
Output current (continuous)	20 V/3.25 A (continuous) 15 V/3 A (continuous) 9 V/3 A (continuous) 5 V/3 A (continuous)	20 V/3.25 A (continuous) 15 V/3 A (continuous) 9 V/3 A (continuous) 5 V/3 A (continuous)	20 V/5.25 A (continuous) 15 V/3 A (continuous) 9 V/3 A (continuous) 5 V/3 A (continuous)
Rated output voltage	20 VDC 15 VDC 9 VDC 5 VDC	20 VDC 15 VDC 9 VDC 5 VDC	20 VDC 15 VDC 9 VDC 5 VDC
Temperature range:			
Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.			

Power adapter requirements

 **NOTE:** If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell Pro 3 14 P314260.

Table 20. Power adapter requirements

Description	Value
Power that is required from a power adapter to achieve optimal performance.	65 W
Power that charges the computer at a slower speed. i NOTE: A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	Less than 60 W
Minimum power that is required from a power adapter to operate the computer and charge the battery. i NOTE: A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	27 W
USB Power Delivery (PD) fast charging	Supported
ExpressCharge mode	Supported i NOTE: Ensure that the computer with a 45 Wh battery is connected to a 65 W power adapter for this feature to be supported.

Battery

The following table lists the battery specifications of your Dell Pro 3 14 P314260.

Table 21. Battery specifications

Description	Option one	Option two	Option three
Battery type	3-cell lithium-ion (45 Wh)	3-cell lithium-ion (57 Wh)	3-cell lithium-ion (70 Wh)
Battery voltage (nominal)	11.25 VDC	11.25 VDC	11.25 VDC
Battery weight (maximum)	0.19 kg (0.42 lb)	0.24 kg (0.53 lb)	0.27 kg(0.59 lb)
Battery dimensions:			
Height	6.50 mm (0.26 in.)	6.50 mm (0.26 in.)	6.50 mm (0.26 in.)
Width	272 mm (10.71 in.)	272 mm (10.71 in.)	272 mm (10.71 in.)
Depth	74.90 mm (2.95 in.)	74.90 mm (2.95 in.)	74.90 mm (2.95 in.)
Temperature range:			
Operating	- Charge: 0°C to 50°C (32°F to 122°F) - Discharge: 0°C to 70°C (32°F to 158°F)	- Charge: 0°C to 50°C (32°F to 122°F) - Discharge: 0°C to 70°C (32°F to 158°F)	- Charge: 0°C to 50°C (32°F to 122°F) - Discharge: 0°C to 70°C (32°F to 158°F)
Storage	-20°C to 60°C (-4°F to 140°F)	-20°C to 60°C (-4°F to 140°F)	-20°C to 60°C (-4°F to 140°F)
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions		
Battery charging time (approximate, when the computer is turned off)			
Standard	3 hours	3 hours	3 hours
ExpressCharge	2 hours	2 hours	2 hours
ExpressCharge boost	From 0% up to 35% in as little as 20 minutes	From 0% up to 35% in as little as 20 minutes	From 0% up to 35% in as little as 20 minutes

Table 21. Battery specifications (continued)

Description	Option one	Option two	Option three
Coin-cell battery	None	None	None
NOTE: You can control the battery charging time, duration, start and end time, and so on, using the settings on the Dell Optimizer application. For more information about Dell Optimizer application, search Dell Support Site. CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components. CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption.			

Power requirements(for computers shipped with 3-cell, 45 Wh battery)

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 8. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 59 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Power requirements(for computers shipped with 3-cell, 57 Wh battery)

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 9. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 75 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Power requirements(for computers shipped with 3-cell, 70 Wh battery)

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 10. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 93 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Battery-charge status light

The following table lists the battery-charge and status light behavior of your Dell Pro 3 14 P314260.

Table 22. Battery charge and status light behavior

Power source	LED behavior	System power state	Battery charge level
AC adapter	Off	S0 or S5	Fully charged
AC adapter	Solid white	S0 or S5	< Fully charged
Battery	Off	S0 or S5	11-100%
Battery	Solid amber (590+/-3 nm)	S0 or S5	< 10%

- S0 (ON): The computer is turned on.
- S4 (Hibernate): The computer consumes the least power in the Hibernated state than in the ON or OFF state. The computer is almost in the OFF state. The context data is written to a storage device, allowing you to resume from where you left when the computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

Table 23. Ethernet (RJ45) status LED

LED Behavior	Connection status
Solid Amber	The RJ45 ethernet cable is connected properly from the router or switch to the computer. The connection is active.
Blinking Amber	Data transfer is in progress.

Display

The following table lists the display specifications of your Dell Pro 3 14 P314260.

Table 24. Display specifications

Description	Option one	Option two	Option three
Display type	14-inch, Wide Ultra Extended Graphics Array (WUXGA)	14-inch, Wide Ultra Extended Graphics Array (WUXGA), ComfortView Plus, Low Blue Light	14-inch, Wide Ultra Extended Graphics Array (WUXGA), ComfortView Plus, Low Blue Light, Super Low Power
Display-panel technology	In-Plane Switching (IPS), White Light Emitting Diode (WLED)	In-Plane Switching (IPS), White Light Emitting Diode (WLED)	In-Plane Switching (IPS), White Light Emitting Diode (WLED), super low power panel
Display-panel dimensions (active area):			
Height	188.50 mm (7.42 in.)	188.50 mm (7.42 in.)	188.50 mm (7.42 in.)
Width	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)
Diagonal	355.60 mm (14.00 in.)	355.60 mm (14.00 in.)	355.60 mm (14.00 in.)
Display-panel native resolution	1920 x 1200	1920 x 1200	1920 x 1200
Luminance (typical)	400 nits	400 nits	500 nits
Megapixels	2.30	2.30	2.30
Color gamut	62.5% sRGB	100% sRGB	100% sRGB
Color depth	6-bit + FRC	8-bit + FRC	8-bit
Pixels Per Inch (PPI)	162	162	162
Contrast ratio	- Minimum: 800:1 - Typical: 1000:1	- Minimum: 800:1 - Typical: 1000:1	- Minimum: 1200:1 - Typical: 1500:1
Response time (maximum)	35 ms	35 ms	35 ms
Refresh rate	60 Hz	48 Hz 60 Hz	1 Hz to 120 Hz
Horizontal view angle	- Minimum: +/- 80 degrees - Typical: +/- 89 degrees	- Minimum: +/- 80 degrees - Typical: +/- 89 degrees	- Minimum: +/- 80 degrees - Typical: +/- 89 degrees
Vertical view angle	- Minimum: +/- 80 degrees - Typical: +/- 89 degrees	- Minimum: +/- 80 degrees - Typical: +/- 89 degrees	- Minimum: +/- 80 degrees - Typical: +/- 89 degrees
Pixel pitch	0.1571 mm	0.1571 mm	0.1571 mm
Power consumption (maximum)	4.64 W	4.50 W	3.35 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare
Touch options	Non-Touch	Touch	Non-Touch

ComfortView Plus

 **WARNING:** Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 inches and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

Fingerprint reader

The following table lists the fingerprint-reader specifications of your Dell Pro 3 14 P314260.

Table 25. Fingerprint reader specifications

Description	Values
Sensor technology	Trans-capacitive sensing
Sensor resolution	500 dpi
Sensor pixel size	• X: 108 • Y: 88

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell Pro 3 14 P314260.

Table 26. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel Graphics	• Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort 2.1 • One HDMI 2.1 port	Shared system memory	• Intel Core Ultra Series 3 processors • Intel Core Series 3 processors

Multiple displays, port and resolution matrix

The following table lists the multiple displays, port and resolution matrix of your Dell Pro 3 14 P314260.

NOTE: DisplayPort Multi-Stream Technology is a feature that allows you to connect up to four displays to a single DisplayPort port on your device using a daisy chain. This enables you to use multiple displays simultaneously, increasing your productivity and workspace efficiency.

Table 27. Video port and resolution matrix

Port type	Thunderbolt 4 (40 Gbps) port with Power Delivery and DisplayPort 2.1		HDMI 2.1
	Intel Core Ultra Series 3 processors	Intel Core Series 3 processors	
Maximum resolution—single display	One display (7680 x 4320 at 60 Hz)	One display (3840 x 2160 at 60 Hz)	One display (3840 x 2160 at 60 Hz)

Table 27. Video port and resolution matrix (continued)

Port type	Thunderbolt 4 (40 Gbps) port with Power Delivery and DisplayPort 2.1		HDMI 2.1
	Intel Core Ultra Series 3 processors	Intel Core Series 3 processors	
Maximum resolution—two displays (dual MST)	Display lid open: One display (7680 x 4320 at 60 Hz) Display lid closed: Two displays (7680 x 4320 at 60 Hz)	Display lid open: One display (3840 x 2160 at 60 Hz) Display lid closed: Two displays (3840 x 2160 at 60 Hz)	Not applicable
Maximum resolution—three displays (triple MST)	Display lid open: One display (7680 x 4320 at 60 Hz) + One display (3840 x 2160 at 60 Hz) Display lid closed: One display (7680 x 4320 at 60 Hz) + Two displays (3840 x 2160 at 60 Hz)	Display lid open: Two displays (3840 x 2160 at 60 Hz) Display lid closed: Three displays (3840 x 2160 at 60 Hz)	Not applicable
Maximum resolution—four displays (quad MST)	Display lid open: Three displays (3840 x 2160 at 60 Hz) Display lid closed: Four displays (3840 x 2160 at 60 Hz)	Not supported	Not applicable

Hardware security

The following table lists the hardware security of your Dell Pro 3 14 P314260.

Table 28. Hardware security

Hardware security
Kensington security-cable slot
Chassis intrusion switch
Trusted Platform Module (TPM) 2.0 (FIPS 140-3 level 1 Certified / TCG Certified)
SPI Flash Tamper Detection Circuit
Dell SafeBIOS including Dell Off-host BIOS Verification
BIOS Resilience
BIOS Recovery and additional BIOS Controls
SafelD including Trusted Platform Module (TPM) 2.0
Self-Encrypting Drives (SED)

Table 28. Hardware security (continued)

Hardware security
D-Pedigree (Secure Supply Chain Functionality)
Quantum-resistant BIOS verification and signing updates
Quantum-resistant embedded controller (EC)

Operating and storage environment

This table lists the operating and storage specifications of your Dell Pro 3 14 P314260.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 29. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32 °F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Using the privacy shutter

1. Slide the privacy shutter to the left to access the camera lens.
2. Slide the privacy shutter to the right to cover the camera lens.

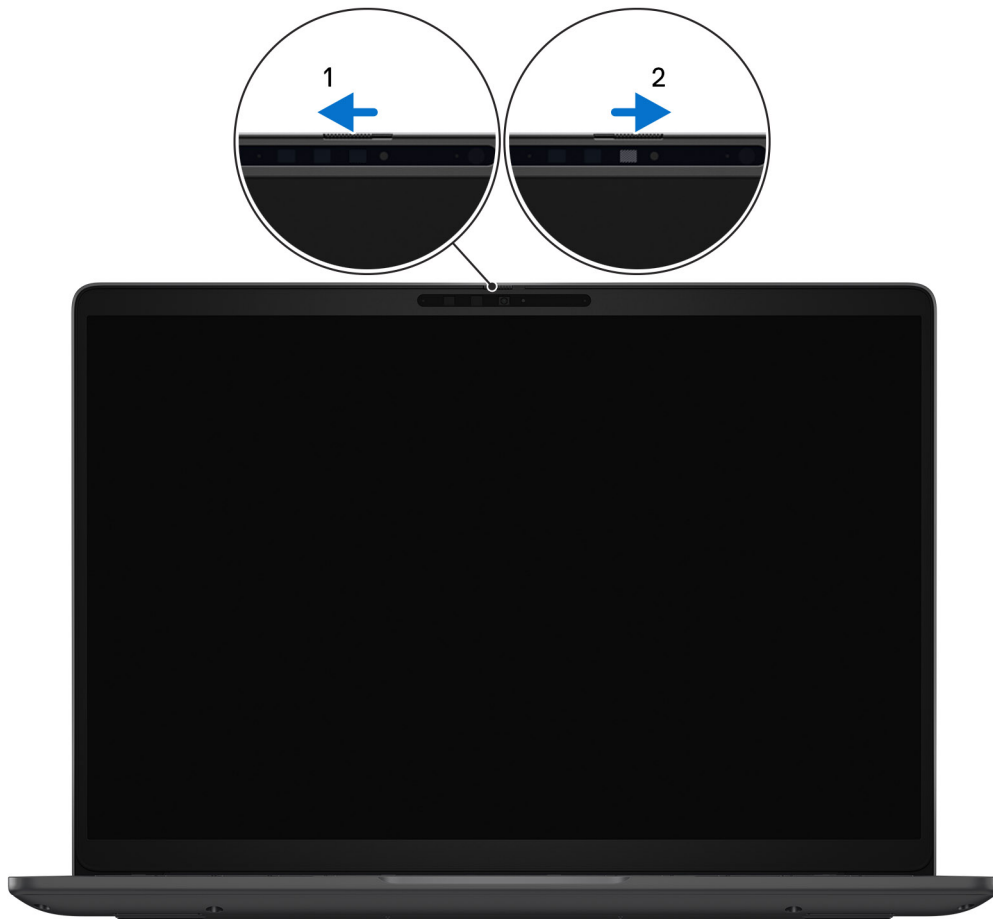


Figure 11. Camera shutter

Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell Pro 3 14 P314260 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the [Dell Support Site](#).

Dell support policy

For information about Dell support policy, search [Dell Support Site](#).

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 30. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	Dell Site
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	Windows Support Site Linux Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at Dell Support Site . For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles	1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select Support > Support Library. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [Contact Support at Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information in your purchase invoice, packing slip, bill, or Dell product catalog.

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 31. Revision history

Revision	Date	Description
A00	05-2026	Original publish date.
A01	07-2026	Added processor information.