


### Overview

#### HPE ProLiant DL380 Generation9 (Gen9)


The HPE ProLiant DL380 Gen9 Server delivers the best performance and expandability in the Hewlett Packard Enterprise 2P rack portfolio. Reliability, serviceability and near continuous availability, backed by a comprehensive warranty, make it ideal for any environment. Deploy the data center standard.

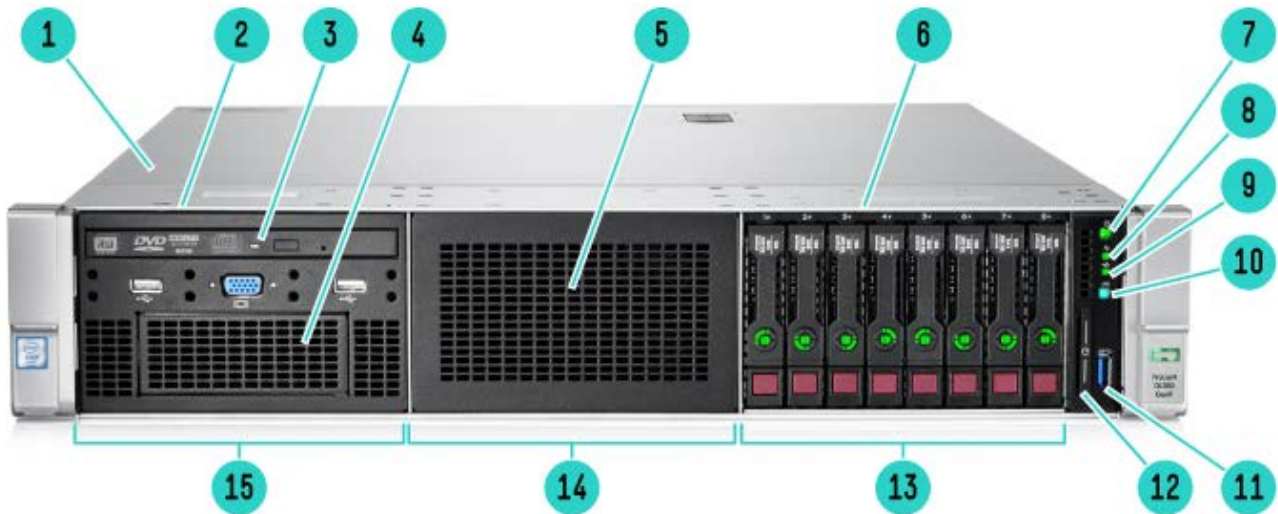

#### Front View - 8SFF Chassis with Optional Universal Media Bay shown

1. Quick removal access panel
2. Universal Media bay. 2 USB 2.0 and VGA standard (8SFF bay optional)
3. Optional Optical drive. Requires Universal Media bay
4. Optional 2 SFF HDD, blank shown. Requires Universal Media bay
5. Drive Bay 2. Blank shown, 8SFF or 6NVMe optional
6. 8 SFF Drive Cage Bay
7. Power On/Standby button and system power LED button
8. Health LED
9. NIC status
10. UID button
11. USB 3.0
12. Serial label pull tag
13. Bay 3
14. Bay 2
15. Bay 1


## Overview

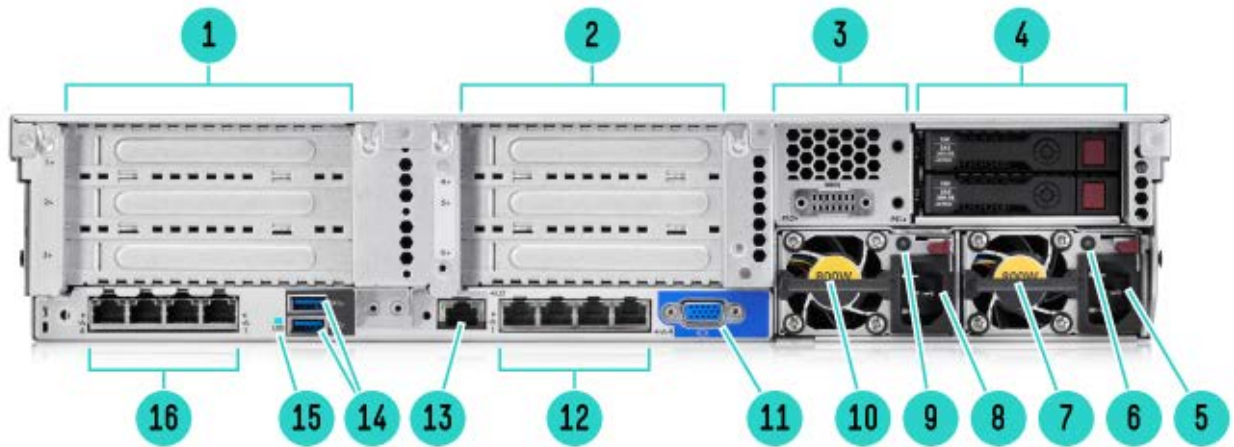

## Rear View

- |   |   |
|---|---|
| <ol style="list-style-type: none"> <li>1. PCI Slots (Slots 1-3 top to bottom, riser shipped standard)</li> <li>3. Optional serial port</li> <li>5. Power supply Power connection</li> <li>7. HPE Flexible Slot Power Supply bay 1 (800w shown)</li> <li>9. Power supply Power LED</li> <li>11. VGA connector</li> <li>13. Dedicated iLO connector</li> <li>15. Unit ID LED</li> </ol> | <ol style="list-style-type: none"> <li>2. PCI Slots (Slots 4-6 top to bottom, requires second riser card, and second processor)</li> <li>4. Optional rear 2 SFF HDD (supported in 24 SFF or 12 LFF front end)</li> <li>6. Power supply Power LED</li> <li>8. Power supply Power connection</li> <li>10. HPE Flexible Slot Power Supply bay 2 (800w shown)<br/><b>NOTE: Optional Battery Back up option.</b></li> <li>12. Embedded 4x1GbE Network Adapter</li> <li>14. USB 3.0 connectors (2)</li> <li>16. Optional FlexibleLOM ports (Shown: 4x1GbE)</li> </ol> |
|---|---|

## Overview

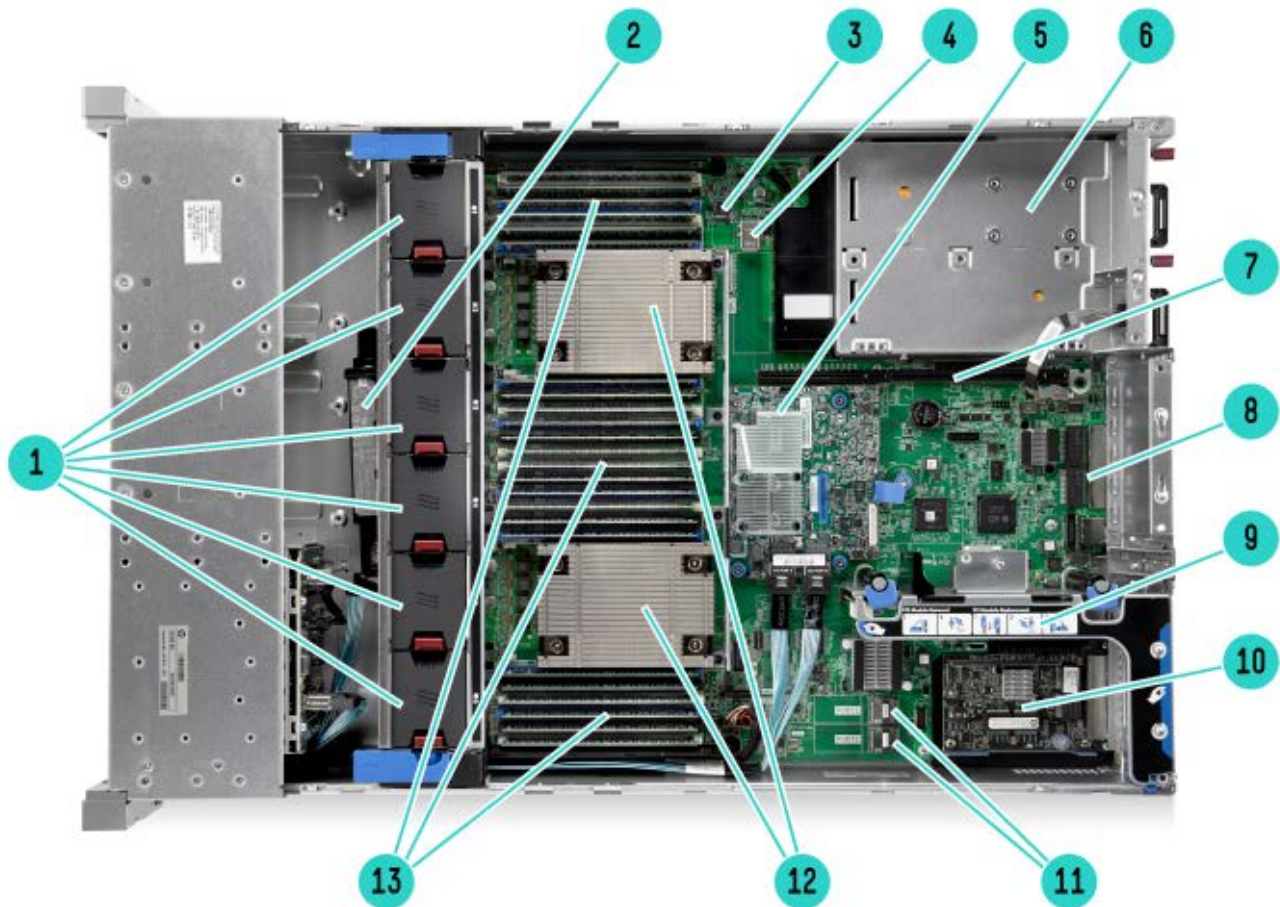

### Internal View

- |  |   |
|--|---|
| <p>1. Fan cage shown with 6 standard Hot-plug fans (High Performance fans optional)</p> <p>3. MicroSD card slot<br/><b>NOTE: Optional Dual MicroSD.</b></p> <p>5. Optional HPE Flexible Smart Array or Smart HBA (H240ar shown)</p> <p>7. Connection for second (optional) riser (Required second CPU)</p> <p>9. Primary PCIe riser, standard (Optional double wide GPU riser)</p> <p>11. X4 SATA ports (1 and 2)</p> <p>13. DDR4 DIMM slots. Shown fully populated in 24 slots (12 per processor)</p> | <p>2. Optional HPE Smart Storage Battery</p> <p>4. Internal USB 3.0 connector (2)</p> <p>6. (Under) Hot Plug redundant HPE Flexible Slot Power supplies<br/><b>NOTE: Optional Micro UPS Battery Back up option.</b></p> <p>8. Embedded 4x1Gbe NIC</p> <p>10. Optional FlexibleLOM slot</p> <p>12. 2 Processors, heatsink showing, with HPE Smart Socket Guide</p> |
|--|---|

### What's New

- New NVIDIA GPU
- New higher capacity LFF and SSD drives
- New 375GB NVMe x4 Lanes Wt SFF SCN DSF SSD
- New 750GB PCIe x4 Lanes Wl HHHl DSF Card

## Standard Features

**NOTE:** For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

### Processor

Up to two of the following depending on model

Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
E5-2699v3	2.3GHz	18	45MB	145W	9.6GT/s	2133
E5-2698v3	2.3GHz	16	40MB	135W	9.6GT/s	2133
E5-2697v3	2.6GHz	14	35MB	145W	9.6GT/s	2133
E5-2695v3	2.3GHz	14	35MB	120W	9.6GT/s	2133
E5-2690v3	2.6GHz	12	30MB	135W	9.6GT/s	2133
E5-2687Wv3	3.1GHz	10	25MB	160W	9.6GT/s	2133
E5-2683v3	2.0GHz	14	35MB	120W	9.6GT/s	2133
E5-2680v3	2.5GHz	12	30MB	120W	9.6GT/s	2133
E5-2670v3	2.3GHz	12	30MB	120W	9.6GT/s	2133
E5-2667v3	3.2GHz	8	20MB	135W	9.6GT/s	2133
E5-2660v3	2.6GHz	10	25MB	105W	9.6GT/s	2133
E5-2650v3	2.3GHz	10	25MB	105W	9.6GT/s	2133
E5-2650Lv3	1.8GHz	12	30MB	65W	9.6GT/s	2133
E5-2643v3	3.4GHz	6	20MB	135W	9.6GT/s	2133
E5-2640v3	2.6GHz	8	20MB	90W	8.0GT/s	1866
E5-2637v3	3.5GHz	4	15MB	135W	9.6GT/s	2133
E5-2630v3	2.4GHz	8	20MB	85W	8.0GT/s	1866
E5-2630Lv3	1.8GHz	8	20MB	55W	8.0GT/s	1866
E5-2623v3	3.0GHz	4	10MB	105W	8.0GT/s	1866
E5-2620v3	2.4GHz	6	15MB	85W	8.0GT/s	1866
E5-2609v3	1.9GHz	6	15MB	85W	6.4GT/s	1600
E5-2603v3	1.6GHz	6	15MB	85W	6.4GT/s	1600
E5-2699v4	2.2GHz	22	55MB	145W	9.6GT/s	2400
E5-2698v4	2.2GHz	20	50MB	135W	9.6GT/s	2400
E5-2697v4	2.3GHz	18	45MB	145W	9.6GT/s	2400
E5-2697Av4	2.6GHz	16	40MB	145W	9.6GT/s	2400
E5-2695v4	2.1GHz	18	45MB	120W	9.6GT/s	2400
E5-2690v4	2.6GHz	14	35MB	135W	9.6GT/s	2400
E5-2687Wv4	3.0GHz	12	30MB	160W	9.6GT/s	2400
E5-2683v4	2.1GHz	16	40MB	120W	9.6GT/s	2400
E5-2680v4	2.4GHz	14	35MB	120W	9.6GT/s	2400
E5-2667v4	3.2GHz	8	25MB	135W	9.6GT/s	2400
E5-2660v4	2.0GHz	14	35MB	105W	9.6GT/s	2400
E5-2650v4	2.2GHz	12	30MB	105W	9.6GT/s	2400
E5-2650Lv4	1.7GHz	14	35MB	65W	9.6GT/s	2400
E5-2643v4	3.4GHz	6	20MB	135W	9.6GT/s	2400
E5-2640v4	2.4GHz	10	25MB	90W	8.0GT/s	2133
E5-2637v4	3.5GHz	4	15MB	135W	9.6GT/s	2400
E5-2630v4	2.2GHz	10	25MB	85W	8.0GT/s	2133
E5-2630Lv4	1.8GHz	10	25MB	55W	8.0GT/s	2133
E5-2623v4	2.6GHz	4	10MB	85W	8.0GT/s	2133

## Standard Features

E5-2620v4	2.1GHz	8	20MB	85W	8.0GT/s	2133
E5-2609v4	1.7GHz	8	20MB	85W	6.4GT/s	1866
E5-2603v4	1.7GHz	6	15MB	85W	6.4GT/s	1866
E5-2699Av4	2.4GHz	22	55MB	145W	9.6GT/s	2400

**NOTE:** All processors above 120W use a high efficiency Heatsink. Doublewide PCIe cards are only supported with this Heatsink. For processors with a standard Heatsink that require double wide PCIe cards, the Graphics Enablement kit option is also required (719082-B21).

**NOTE:** Mixing of E5-2600v3 and E5-2600v4 processors is not supported.

**NOTE:** Field upgrade from E5-2600v3 to E5-2600v4 is supported.

**NOTE:** All processors support Hyper-Threading except E5-2609 v4/v3 and E5-2603 v4/v3.

### Chipset

Intel® C610 Series Chipset  
 Intel® E5-2600v3 Processor Family  
 Intel® E5-2600v4 Processor Family

**NOTE:** For more information regarding Intel® chipsets, please see the following URL: <http://www.intel.com/products/server/chipsets/>

### On System Management Chipset

HPE iLO (Firmware HPE iLO4 2.0) 4GB NAND

**NOTE:** Read and learn more in the [iLO QuickSpecs](#).

### Memory

One of the following depending on model

Type:  
 HPE SmartMemory  
 DDR4 Registered (RDIMM), Load Reduced (LRDIMM) or Persistent Memory (NVDIMM)

DIMM Slots Available	24	(12 DIMM slots per processor, 4 channels per processor, 3 DIMMs per channel)
Maximum Capacity (LRDIMM)	3TB	(24 x 128GB LRDIMM @2400MHz)*
Maximum Capacity (RDIMM)	768GB	(24 x 32GB RDIMM @2400MHz)
Maximum Capacity (NVDIMM)	128GB	(16 x 8GB NVDIMM)*

NVDIMM support only with the E5-2600v4 processors, and RDIMMs only

- Note mixing of 2133 and 2400MHz memory is not supported
- Note mixing of RDIMM and LRDIMM memory is not supported
- Note the 128GB LRDIMM may not be mixed with other DIMM capacities/types

### Memory Protection

Advanced ECC	Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.
Online Spare	Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

### Expansion Slots

Primary Riser (Standard)	Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
--------------------------	-------------------	------------	-----------	-----------------	------------	-------------	-------

## Standard Features

1	PCIe 3.0	X8	X16	7	Full-height, half-length slot	Proc 1
2	PCIe 3.0	X8	X16	10	Full-height, half-length slot	Proc 1
3	PCIe 3.0	X8	X8	13	Half length/full height	Proc 1

**NOTE:** Bus Width Indicates the number of physical electrical lanes running to the connector.

**NOTE:** All slots support PCIe cards to 150W or more, but an additional Power Cable Kit is required.

**NOTE:** Double wide PCIe cards are only supported in risers with the Processors leveraging the High Performance Heatsink. For Processors requiring double wide GPU support please order the GPU enablement kit (719082-B21).

Slot 2 PCIe Riser  
(Optional 3-slot)  
719073-B21

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
4	PCIe 3.0	X16	X16	16	Full-height, full-length slot	Proc 2
5	PCIe 3.0	X16	X16	20	Full-height, full-length slot	Proc 2
6	PCIe 3.0	X8	X8	23	Full-height, half-length slot	Proc 2

**NOTE:** Bus Width Indicates the number of physical electrical lanes running to the connector.

**NOTE:** When populating the second optional riser slot, the second processor must be installed.

**NOTE:** All slots support PCIe cards to 150W or more, but an additional Power Cable Kit is required.

**NOTE:** Double wide PCIe cards are only supported in risers with the Processors leveraging the High Performance Heatsink. For Processors requiring double wide GPU support please order the GPU enablement kit (719082-B21).

Slot 1 PCIe Riser  
(Optional 2-slot)  
719076-B21

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
2	PCIe 3.0	X16	X16	0x05	Full-height, full-length slot	Proc 1
3	PCIe 3.0	X8	X8	0x08	Full-height, half-length slot	Proc 1

**NOTE:** Bus Width Indicates the number of physical electrical lanes running to the connector.

**NOTE:** This will replace the standard primary riser and supports double wide cards.

**NOTE:** All slots support PCIe cards to 150W or more, but an additional Power Cable Kit is required.

**NOTE:** Double wide PCIe cards are only supported in risers with the Processors leveraging the High Performance Heatsink. For Processors requiring double wide GPU support please order the GPU enablement kit (719082-B21).

## Standard Features

### Storage Controller

One of the following depending on model

Entry Models HPE Dynamic Smart Array B140i Controller

**NOTE:** The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.

**NOTE:** The B140i defaults to AHCI off the chipset. Smart array needs to be enables on the SATA only models if required.

**NOTE:** The B140i will not operate in Legacy mode.

Base Models HPE Dynamic Smart Array B140i Controller  
HPE Flexible Smart Array P440ar/2G FIO Controller  
HPE Flexible Smart Array P840/4G FIO Controller  
HPE Smart Array P840ar/2G Controller

Performance Models HPE Dynamic Smart Array B140i Controller  
HPE Flexible Smart Array P440ar/2GB

### Internal Storage Devices

One of the following depending on model

Optical Drive Ships standard in Performance Models  
Optional: DVD-ROM, DVD-RW

Hard Drives None ship standard

Hard Drive Bays 8 SFF with optional Universal Media Bay, 8 SFF bay or 6 NVME drive options  
24 SFF plus optional 2 SFF drives rear  
12 LFF plus optional 3 LFF drives rear

**NOTE:** The 3 LFF rear drives will consume space for the secondary riser.

**NOTE:** The 12 LFF model also supports 2 SFF rear which allows for the second riser.

**NOTE:** The 6 NVMe drive option can only be leveraged in the SFF model and replaces Bay 2.

4 LFF drive bays total

**NOTE:** The Universal Media Bay (724865-B21) not available with the LFF model or the 24SFF model, and can only be populated in Bay1.

**NOTE:** The 8SFF can be upgraded with a drive cage to 16 or 24 SFF with field upgrades. For optimal upgrade Bay2 should be populated second, with Bay 3 the last to be populated for a field upgrade to 24 SFF.

**NOTE:** The 4LFF model cannot be upgraded to 12LFF in the field.

**NOTE:** All Pre-configured Models come with an embedded 10-Port SATA controller. Optional HPE Flexible Smart Array and Smart SAS HBA Controllers can be added.

### Maximum Internal Storage

	CAPACITY	CONFIGURATION
Hot Plug SFF SAS	52.0TB	24+2 x 2TB (with optional rear SFF drive cage)
Hot Plug SFF SATA	52.0TB	24+2 x 2TB (with optional SFF drive cage)
Hot Plug LFF SAS	180.0TB	12+3 x 12TB (with optional rear LFF drive cage)
Hot Plug LFF SATA	180.0TB	12+3 x 12TB (with optional rear LFF drive cage)
Hot Plug SFF SAS SSD	397.8TB	24+2 x 15.3TB (with optional rear SFF drive cage)
Hot Plug SFF SATA SSD	99.84TB	24+2 x 3.84TB (with optional rear SFF drive cage)
Hot Plug LFF SATA SSD	57.6B	12+3 x 3.84TB (with optional rear LFF drive cage)xx
Hot Plug SFF NVMe PCIe SSD	12TB NVMe + 36TB SFF	6x2TB NVMe plus 36TB with 18 SFF (Bay 1, bay 3 and optional rear drive support)

## Standard Features

### Power Supply

HPE 500W Flex Slot Platinum Hot Plug Power Supply

**NOTE:** Available in 94% efficiency.

HPE 800W Flex Slot Platinum Hot Plug Power Supply

**NOTE:** Available in 94% and 96% efficiency.

**NOTE:** Also available in -48VDC and 227VAC/380VDC power inputs.

HPE 1400W Flex Slot Platinum Plus Hot Plug Power Supply

**NOTE:** Available in 94% efficiency.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen9 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (AOK02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.

Power specifications and technical content for all HPE Server power supplies can be found at <http://www.hpe.com/info/proliant/powersupply>.

### System Fans

One of the following depending on model

2P model

**NOTE:** 1P models typically ship with 4 standard fans. The second processor option kit contains 2 additional fans.

**NOTE:** The 12LFF and 24SFF models ship with 6 High Performance fans as standard.

**NOTE:** High Performance Fan Kit is available to meet ambient temperature environments.

**NOTE:** High Performance Fan Kit is required for Passive GPU support.

**NOTE:** The 8SFF Bay1 kit (719067-B21) will ship with 6 High efficiency fans.

### Non-redundant

### Redundant

6 fans

### Interfaces

Serial

Optional

Video

2 (1 front, optional via Universal Media Bay, 724865-B21), 1 back not active simultaneously

FlexibleLOM Network Ports

4 x 1Gb ports shipping standard with optional FlexibleLOM

HPE iLO Remote

1 Gb Dedicated

Management Network Port

Micro SD Slot

1 Micro SD

**NOTE:** The Micro SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.

USB 3.0

Up to 5 total: 1 front, 2 rear, 2 internal (secure), 2 optional USB 2.0 front via Universal Media Bay

SID (Systems Insight Display) Optional

**NOTE:** Not shipping as standard. Available as a CTO option or as a field upgrade (768900-B21).

## Standard Features

**Operating Systems and Virtualization Software Support for ProLiant Servers**

- [Microsoft Windows Server](#)
- [Canonical Ubuntu](#)
- [Red Hat Enterprise Linux \(RHEL\)](#)
- [SUSE Linux Enterprise Server \(SLES\)](#)
- [Oracle Solaris](#)
- [VMware](#)
- [Citrix XenServer](#)
- [ClearOS](#)

**NOTE:** ClearOS allows you to build a fully functional server that is just right for you at no upfront cost. It is available via CTO preload, Intelligent Provisioning or via download. For more information on ClearOS, please visit <http://www.hpe.com/servers/clearos>.

**NOTE:** For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hpe.com/info/ossupport> and our [driver download page](#).

---

### Upgradeability

Upgradeable to 2 processors (36 Cores)

**NOTE:** Processor upgrade available from Intel® Xeon® Processors E5-2600v3. Please contact Hewlett Packard Enterprise Technology Sales (<http://www.hpe.com/support>), your local Hewlett Packard Enterprise Re-seller.

Up to 24 DIMM slots available for higher Memory capacity

FlexibleLOM connector for 1 Gigabit or 10 Gigabit networking options

HPE Flexible Smart Array or Smart HBA Controllers

Embedded 10-Port SATA, B140i as standard

Optional 3 slot riser (x16, x16, x8), or 2 slot primary riser (x16, x8)

**NOTE:** To take advantage of the additional 3 PCI slot upgrade, the second processor must be installed.

Redundant Power Supply

Optical Drive supported via Universal Media Bay

**NOTE:** The Universal Media bay provides front VGA and 2xUSB 2.0, plus ability to add 2SFF and Optical.

**NOTE:** Universal Media bay is only available with 8 or 8+8SFF model & can be populated in Bay1 only.

HPE Legacy Mode (FIO only, 758959-B22)

**NOTE:** UEFI is the default mode for all SKUs. Can change default to legacy via CTO.

---

### Industry Standard Compliance

ACPI 2.0b Compliant

PCIe 3.0 Compliant

PXE Support

WOL Support

Microsoft® Logo certifications

USB 3.0 Support

USB 2.0 Support

**NOTE:** This support is on the optional Universal Media Bay.

Energy Star

ASHRAE A3/A4

**NOTE:** The DL380 Gen9 is now one of the first HPE ProLiant Gen9 Servers with Extended Ambient Support up to 45 C for data center infrastructures designed for better energy efficiency such as but not limited to fresh air cooling.

## Standard Features

For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

UEFI (Unified Extensible Firmware Interface Forum)

**NOTE:** UEFI is the default for the DL380 Gen9. Legacy model can be selected in the field or as a CTO option (758959-B22).

### Graphics

Integrated Matrox G200eH2 video standard with 16MB of Video RAM

- 1280 x 1024 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE iLO 4 On System Management Memory

- 16 MB Flash
- 256 MB DDR3 with ECC (112 MB after ECC and video)

### HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

**NOTE:** The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

### Form Factor

One of the following depending on model

2U Rack form factor

8 SFF & 24SFF Drive Bay Version:  
3.44 x 17.54 x 26.75 in (8.73 x 44.55 x 67.94 cm)

4 LFF & 12LFF Drive Bay Version:  
3.44 x 17.54 x 28.75 in (8.73 x 44.55 x 73.02 cm)

**NOTE:** Dimensions without bezel.

## Standard Features

<b>Embedded Management</b>	<b>HPE Integrated Lights-Out (HPE iLO)</b>	Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <a href="http://www.hpe.com/info/iLO">http://www.hpe.com/info/iLO</a> .
	<b>UEFI</b>	Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <a href="http://www.hpe.com/servers/uefi">http://www.hpe.com/servers/uefi</a> .
	<b>RESTful API</b>	RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at <a href="http://www.hpe.com/info/restfulapi">http://www.hpe.com/info/restfulapi</a> .
	<b>Intelligent Provisioning</b>	Hassle free server and OS provisioning for 1 or few servers with Intelligent Provisioning. Learn more at <a href="http://www.hpe.com/servers/intelligentprovisioning">http://www.hpe.com/servers/intelligentprovisioning</a> .
	<b>Embedded Remote Support</b>	The Hewlett Packard <b>Enterprise</b> embedded remote support, when used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at <a href="http://www.hpe.com/info/insightonline/explore">http://www.hpe.com/info/insightonline/explore</a> .

---

<b>Server utilities</b>	<b>Smart Update</b>	Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP). Learn more at <a href="http://www.hpe.com/servers/smartupdatemanager">http://www.hpe.com/servers/smartupdatemanager</a> .
	<b>HPE Systems Insight Manager (HPE SIM)</b>	HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <a href="http://www.hpe.com/servers/hpsim">http://www.hpe.com/servers/hpsim</a> .
	<b>Scripting Tool Kit and Windows PowerShell</b>	Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <a href="http://www.hpe.com/servers/proliant/stk">http://www.hpe.com/servers/proliant/stk</a> or <a href="http://www.hpe.com/servers/powershell">http://www.hpe.com/servers/powershell</a> .
	<b>RESTful Interface Tool</b>	RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and deploy servers at scale. Learn more at <a href="http://www.hpe.com/info/resttool">http://www.hpe.com/info/resttool</a> .
	<b>HPE iLO Mobile Application</b>	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <a href="http://www.hpe.com/info/iLO/mobileapp">http://www.hpe.com/info/iLO/mobileapp</a> .
	<b>HPE Insight Online</b>	HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <a href="http://www.hpe.com/info/insightonline/explore">http://www.hpe.com/info/insightonline/explore</a> .

---

## Standard Features

### Security

Power-on password  
Serial interface control  
Administrator's password  
UEFI  
iLO 4 (Integrated Lights-Out 4) has 12 customizable user accounts and SSL encryption  
Integrated Lights-Out can be disabled via a Global Setting  
iLO Advanced supports directory services integration  
TPM 1.2

---

### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**NOTE:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

## Optional Features

<b>Embedded Management</b>	<b>iLO Advanced</b>	HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <a href="http://www.hpe.com/servers/iloadvanced">http://www.hpe.com/servers/iloadvanced</a> .
<b>Server Management</b>	<b>HPE Insight Control</b>	HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <a href="http://www.hpe.com/info/insightcontrol">http://www.hpe.com/info/insightcontrol</a> .
	<b>HPE Insight Cluster Management Utility (CMU)</b>	HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <a href="http://www.hpe.com/info/cmu">http://www.hpe.com/info/cmu</a> .
<b>Rack and Power Infrastructure</b>	HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at <a href="#">HPE Rack and Power Infrastructure</a> .	
<b>High Performance Clusters</b>	<p>HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering. <a href="https://www.hpe.com/us/en/solutions/hpc-high-performance-computing/hpc-software.html">https://www.hpe.com/us/en/solutions/hpc-high-performance-computing/hpc-software.html</a>.</p> <p><b>NOTE:</b> High Performance Computing (HPC) interconnect technologies are available for this server as part of the HPE Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by Hewlett Packard Enterprise when integrated within a Hewlett Packard Enterprise cluster. Flexible, validated solutions can be defined with the help of configuration tools. <a href="https://www.hpe.com/info/hpc/solutions">https://www.hpe.com/info/hpc/solutions</a>.</p>	
<b>HPC Interconnects</b>	<p><b>NOTE:</b> High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. <a href="https://www.hpe.com/info/hpc/solutions">https://www.hpe.com/info/hpc/solutions</a>.</p>	
<b>Storage Software</b>	Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than Hewlett Packard Enterprise storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities. Storage software that gets the job done:	

## Optional Features

- **Data Protection and Recovery Software**  
Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**  
Hewlett Packard Enterprise storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**  
Hewlett Packard Enterprise storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**  
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**  
Maximize your investment in Hewlett Packard Enterprise storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HPE StoreVirtual VSA**  
Enable highly available and clustered storage in your HPE ProLiant servers with virtualized storage: Add StoreVirtual VSA to multiple servers, manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. To simplify deployment, HPE offers StoreVirtual Ready Nodes, pre-defined reference configurations for converged vSphere and Hyper-V virtualization solutions. You also have the option to install free 1TB-capacity StoreVirtual VSA software during server setup within Intelligent Provisioning. HPE ProLiant Gen9 servers include a 3-year limited license for this HPE software-defined storage at no extra cost. More information, instructional videos, and free management software are available at <http://www.hpe.com/storage/storevirtual>.

**NOTE:** For more information about Storage Software including QuickSpecs, please see: <https://www.hpe.com/us/en/storage/software-defined.html>.

---

### ClearOS

HPE and ClearCenter will help you lower the cost of building on-premise solutions without sacrificing security and ease of use. HPE ProLiant servers with ClearOS give you a simple, secure, and affordable operating system with an intuitive web based graphical user interface that provides a cloud-like experience on-premise, and an Application Marketplace with over 100 apps and growing. Whether you're starting out or scaling, you decide what applications you need and pay as you grow.

**NOTE:** For more information on ClearOS, please visit <http://www.hpe.com/servers/clearos>.

---

### One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <http://ocs.ext.hpe.com/>.

---

## Service and Support

### HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

---

### Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC 2 - HPE CSC reports 2014 - 2015

---

### Recommended Support

#### **Standard: HPE Proactive Care\* with 24x7 coverage, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

#### **Optimized HPE Proactive Care\* with 6 hour call-to-repair commitment, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years' proactive reporting and advice with our highest level of hardware support – Hewlett Packard Enterprise 24x7, six hour hardware call-to-repair. Hewlett Packard Enterprise is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

---

### Related Services

#### **HPE Server Hardware Installation**

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

---

## Service and Support

### HPE Installation and Startup Service

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

### HPE Technology Services Support Credits

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

---

### HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

---

### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

The Hewlett Packard Enterprise Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

\*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>

## Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
2. Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
3. If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

**NOTE:** All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using HPE LFF Hard Drive Blank Kit (666986-B21).

**NOTE:** All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the **ProLiant Power Cables** web page.

**CAUTION:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

	Entry Models	Base Models		
<b>[SKU Number]</b>	826681-B21	826682-B21	826683-B21	848774-B21
<b>Model Name</b>	HPE ProLiant DL380 Gen9 E5-2609v4 1P 8GB-R B140i 8SFF 500W PS Entry SATA Server	HPE ProLiant DL380 Gen9 E5-2620v4 1P 16GB-R P440ar 8SFF 500W PS Base Server	HPE ProLiant DL380 Gen9 E5-2620v4 1P 16GB-R P440ar 12LFF 2x800W PS Base Server	HPE ProLiant DL380 Gen9 E5-2630v4 1P 16GB-R P440ar 8SFF 500W PS Base Server
<b>Processor</b>	Intel® Xeon® E5-2609v4	Intel® Xeon® E5-2620v4		Intel® Xeon® E5-2630v4
<b>Number of Processors</b>	One			
<b>Memory</b>	8GB (1x8GB Registered DIMMs, 2400 MHz) <b>NOTE:</b> With the E5-2609v4 this memory DIMM will only operate at 1866MHz.	16GB (1x16GB Registered DIMMs, 2400 MHz) <b>NOTE:</b> With the E5-2620v4 this memory DIMM will only operate at 2133MHz.	16GB (1x16GB Registered DIMMs, 2400 MHz) <b>NOTE:</b> With the E5-2630v4 this memory DIMM will only operate at 2133MHz.	
<b>Network Controller</b>	HPE Embedded 1Gb Ethernet 4-port 331i Adapter, plus optional HPE FlexibleLOM or stand up card			
<b>Storage Controller</b>	HPE Dynamic Smart Array B140i, plus optional HPE Flexible Smart Array or Smart HBA controller <b>NOTE:</b> Default is AHCI off chipset, Smart Array needs to be enabled on SATA model.	HPE Flexible Smart Array P440ar/2GB	HPE Flexible Smart Array P840ar/2G Controller	HPE Flexible Smart Array P440ar/2GB
<b>Hard Drive</b>	None ship standard		None ship standard	
<b>Internal Storage</b>	8 SFF HDD Bays (upgradable to 24)	8 SFF HDD Bays (upgradable to 24)	12 LFF HDD Bays	8 SFF HDD Bays (upgradable to 24)

## Pre-configured Models

<b>Optical Drive Bay</b>	Optional Universal Media Bay (724865-B21)	Optional Universal Media Bay (724865-B21)	Not Available	Optional Universal Media Bay (724865-B21)
<b>Optical Drive</b>	Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21)	Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21)	Optional via HPE Mobile USB DVDRW Drive (701498-B21)	Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21)
<b>PCI-Express Slots</b>	3 PCIe slots (+3 PCI slots available with upgrade option, second processor required)			
<b>Power Supply</b>	(1) HPE 500W Flex Slot Platinum Power Supply	(1) HPE 500W Flex Slot Platinum Power Supply	(2) HPE 800W Flex Slot Platinum Power Supply	(1) HPE 500W Flex Slot Platinum Power Supply
<b>Fans</b>	4 hot plug fans, redundant	4 hot plug fans, redundant	6 hot plug high performance fans, redundant	4 hot plug fans, redundant
<b>Management</b>	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control (optional), HPE OneView (optional)			
<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails	Rack (2U), HPE Easy Install Rails with CMA		
<b>Warranty</b>	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response			

## Pre-configured Models

	Performance Models	
<b>[SKU Number]</b>	826684-B21	852432-B21
<b>Model Name</b>	HPE ProLiant DL380 Gen9 E5-2650v4 2P 32GB-R P440ar 8SFF 2x10Gb 2x800W Perf Server	HPE ProLiant DL380 Gen9 E5-2660v4 2P 64GB-R P440ar 8SFF 2x10Gb 2x800W Perf Server
<b>Processor</b>	Intel® Xeon® E5-2650v4	Intel® Xeon® E5-2660v4
<b>Number of Processors</b>	Two	
<b>Memory</b>	32GB (2x16GB Registered DIMMs, 2400 MHz)	64GB (4x16GB Registered DIMMs, 2400 MHz)
<b>Network Controller</b>	HPE Embedded 4x1Gb, plus 2x10Gb-T FlexibleLOM	HPE Embedded 4x1Gb, plus 2x10Gb SFP+ FlexibleLOM
<b>Storage Controller</b>	HPE Flexible Smart Array P440ar/2GB	
<b>Hard Drive</b>	None ship standard	
<b>Internal Storage</b>	8 SFF HDD Bays (upgradable to 24)	
<b>Optical Drive Bay</b>	Universal Media Bay (724865-B21)	
<b>Optical Drive</b>	HPE Half-Height SATA DVD-RW Optical Drive	
<b>PCI-Express Slots</b>	6 PCIe 3.0 slots	
<b>Power Supply</b>	(2) HPE 800W Flex Slot Platinum Power Supply	
<b>Fans</b>	6 hot plug fans, redundant	
<b>Management</b>	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (standard), HPE OneView (optional)	
<b>Energy Star</b>	Meets Energy Star requirements	
<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails with CMA	
<b>Warranty</b>	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response	

**NOTE:** UEFI is the standard default for all Predefined models.

## Smart Buy Models

	E5-2600v4 Series Smart Buy Models			
<b>[SKU Number]</b>	859085-S01	859083-S01	850520-S01	850519-S01
<b>Model Name</b>	HPE DL380 Gen9 E5-2690v4 2P SFF US Svr/S-Buy	HPE DL380 Gen9 E5-2660v4 2P SFF US Svr/S-Buy	HPE DL380 Gen9 E5-2667v4 2P SFF US Svr/S-Buy	HPE DL380 Gen9 E5-2650v4 2P SFF US Svr/S-Buy
<b>Processor</b>	Intel® Xeon® E5-2690v4	Intel® Xeon® E5-2660v4	Intel® Xeon® E5-2667v4	Intel® Xeon® E5-2650v4
<b>Number of Processors</b>	Two		One	
<b>Memory</b>	64GB (4x16GB Registered DIMMs, 2400MHz) <b>NOTE: DIMMs will operate at 2400MHz with this processor.</b>		32GB (2x16GB Registered DIMMs, 2400MHz) <b>NOTE: DIMMs will operate at 2400MHz with this processor.</b>	
<b>Network Controller</b>	HPE Embedded 1Gb Ethernet 4-port 331i Adapter			
<b>Storage Controller</b>	HPE Flexible Smart Array P440ar/2GB + Smart Storage Battery			
<b>Hard Drive</b>	None ship standard			
<b>Internal Storage</b>	8 SFF SATA/SAS Bays			
<b>Optical Drive Bay</b>	None Included: Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21)			
<b>PCI-Express Slots</b>	Six (6) PCIe Gen3 Slots		Three (3) PCIe Gen3 slots (+3 PCIe Gen3 slots available with upgrade option, second processor required)	
<b>Power Supply</b>	Two (2) HPE 800W Flex Slot Platinum Power Supplies		Two (2) HPE 500W Flex Slot Platinum Power Supplies	
<b>Fans</b>	Six (6) Standard hot plug fans, redundant		Four (4) Standard hot plug fans, redundant	
<b>Management</b>	Standard: iLO Advanced Optional: Insight Control, HPE OneView		Standard: iLO Management Optional: iLO Advanced, Insight Control, HPE OneView	
<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails			
<b>Warranty</b>	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response			

	E5-2600v4 Series Smart Buy Models		
<b>[SKU Number]</b>	850518-S01	867450-S01	850517-S01
<b>Model Name</b>	HPE DL380 Gen9 E5-2643v4 SFF US Svr/S-Buy	HPE DL380 Gen9 E5-2640v4 SFF US Svr/S-Buy	HPE DL380 Gen9 E5-2609v4 SAS US Svr/S-Buy
<b>Processor</b>	Intel® Xeon® E5-2643v4	Intel® Xeon® E5-2640v4	Intel® Xeon® E5-2609v4
<b>Number of Processors</b>	One		
<b>Memory</b>	32GB (2x16GB Registered DIMMs, 2400 MHz) <b>NOTE: DIMMs will operate at 2400MHz with this processor</b>	16GB (1x16GB Registered DIMMs, 2400 MHz) <b>NOTE: DIMMs will operate at 2133MHz with this processor</b>	8GB (1x8GB Registered DIMMs, 2400 MHz) <b>NOTE: DIMMs will operate at 1866MHz with this processor</b>
<b>Network Controller</b>	HPE Embedded 1Gb Ethernet 4-port 331i Adapter		
<b>Storage Controller</b>	HPE Flexible Smart Array P440ar/2GB + Smart Storage Battery		HPE H240ar Smart Host Bus Adapter
<b>Hard Drive</b>	None ship standard		
<b>Internal Storage</b>	8 SFF SATA/SAS Bays		

## Smart Buy Models

<b>Optical Drive Bay</b>	None Included: Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21)
<b>PCI-Express Slots</b>	3 PCIe Gen3 slots (+3 PCIe Gen3 slots available with upgrade option, second processor required)
<b>Power Supply</b>	One (1) HPE 500W Flex Slot Platinum Power Supply
<b>Fans</b>	Four (4) Standard hot plug fans, redundant
<b>Management</b>	Standard: iLO Management Optional: iLO Advanced, Insight Control, HPE OneView
<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails
<b>Warranty</b>	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

<b>E5-2600v4 Series Smart Buy Models</b>			
<b>[SKU Number]</b>	867448-S01	859084-S01	867449-S01
<b>Model Name</b>	HPE DL380 Gen9 E5-2620v4 SFF US Svr/S-Buy	HPE DL380 Gen9 E5-2620v4 24S US Svr/S-Buy	HPE DL380 Gen9 E5-2620v4 12LFF US Svr/S-Buy
<b>Processor</b>	Intel® Xeon® E5-2620v4		
<b>Number of Processors</b>	One		
<b>Memory</b>	16GB (1x16GB Registered DIMMs, 2400 MHz) <b>NOTE: DIMMs will operate at 2133MHz with this processor</b>	64GB (4x16GB Registered DIMMs, 2400 MHz) <b>NOTE: DIMMs will operate at 2133MHz with this processor</b>	16GB (1x16GB Registered DIMMs, 2400 MHz) <b>NOTE: DIMMs will operate at 2133MHz with this processor</b>
<b>Network Controller</b>	HPE Embedded 1Gb Ethernet 4-port 331i Adapter		
<b>Storage Controller</b>	HPE Flexible Smart Array P440ar/2GB + Smart Storage Battery	HPE Flexible Smart Array P440ar/2GB + Smart Storage Battery + SAS Expander	HPE Flexible Smart Array P840ar/2GB Controller + Smart Storage Battery
<b>Hard Drive</b>	None ship standard		
<b>Internal Storage</b>	8 SFF SATA/SAS Bays	24 SFF SATA/SAS Bays	12 LFF SATA/SAS Bays
<b>Optical Drive Bay</b>	None Included: Optional DVD-ROM (726536-B21) or DVD-RW (726537-B21) via the Universal Media Bay (724865-B21)	None Included: Optional external HPE Mobile USB DVDRW Drive (701498-B21)	
<b>PCI-Express Slots</b>	Three (3) PCIe Gen3 slots (+3 PCIe Gen3 slots available with upgrade option, second processor required)		
<b>Power Supply</b>	One (1) HPE 500W Flex Slot Platinum Power Supply	Two (2) HPE 800W Flex Slot Platinum Power Supplies	
<b>Fans</b>	Four (4) Standard hot plug fans, redundant		
<b>Management</b>	Standard: iLO Management Engine Optional: iLO Advanced, Insight Control, HPE OneView		
<b>Form Factor</b>	Rack (2U), HPE Easy Install Rails		
<b>Warranty</b>	3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response		

## Configuration Information - Factory Integrated Models

### Recommended Options

Offering the best combination of performance, value and availability, Recommended Options have been selected by HPE experts to provide the right technology for a range of workloads and market segments. Fully integrated into the HPE management and security experience, Recommended Options provide the best fit with timely availability.

### Extended Options

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the HPE management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

### Step 1: Base Configuration (choose one of the following configurable models)

<b>CTO Server</b>	HPE ProLiant DL380 Gen9 8SFF Configure-to-order Server	HPE ProLiant DL380 Gen9 NVMe 6 Solid State Drive Express Bay Configure-to-order Server	HPE ProLiant DL380 Gen9 24SFF Configure-to-order Server	HPE ProLiant DL380 Gen9 4LFF Configure-to-order Server	HPE ProLiant DL380 Gen9 12LFF Configure-to-order Server
<b>SKU Number</b>	719064-B21	810393-B21	767032-B21	767033-B21	719061-B21
<b>Processor</b>	2 (optional) x HPE Smart Socket Guide				
<b>DIMM Slots</b>	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory				
<b>Storage Controller</b>	HPE Dynamic Smart Array B140i, plus optional HPE Flexible Smart Array or Smart HBA controller				
<b>PCIe</b>	3 PCIe slots (+3 PCI slots available with upgrade option, second processor required)				
<b>Drive Cage</b>	8SFF Hot Plug (+8SFF and Universal Media Bay Optional)	8SFF +6NVMe Hot Plug (+8SFF or Universal Media Bay Optional)	24SFF Hot Plug	4LFF Hot Plug	12LFF Hot Plug
<b>Network Controller</b>	HPE Embedded 1Gb Ethernet 4-port 331i Adapter, plus optional HPE FlexibleLOM or stand up card	HPE Embedded 1Gb Ethernet 4-port 331i Adapter	HPE Embedded 1Gb Ethernet 4-port 331i Adapter, plus optional HPE FlexibleLOM or stand up card		
<b>Fans</b>	4 hot plug fans, redundant	6 hot plug high performance fans, redundant		4 hot plug fans, redundant	6 hot plug high performance fans, redundant
<b>Management</b>	iLO Management (standard), Intelligent Provisioning (standard)				
<b>USB</b>	1 front, 2 internal, 2 rear	1 front, 1 internal, 2 rear	1 front, 2 internal, 2 rear	No front USB support	
<b>Ears</b>	HPE Quick Release Ears				

## Configuration Information - Factory Integrated Models

**NOTE:** With the NVMe CTO Server (810393-B21) there are limitations on GPU support. This server ships with the standard x8 Risers supporting 6xNVMe drives.

### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HPE Processors	E5-2600v4 series Processors	
	HP DL380 Gen9 Intel® Xeon® E5-2650Lv4 (1.7GHz/14-core/35MB/65W) FIO Processor Kit	817941-L21
	HP DL380 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/10-core/25MB/55W) FIO Processor Kit	817931-L21
	HPE DL380 Gen9 Intel® Xeon® E5-2643v4 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	817939-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2637v4 (3.5GHz/4-core/15MB/135W) FIO Processor Kit	817935-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HP DL380 Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W) FIO Processor Kit	817929-L21
	HP DL380 Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W) FIO Processor Kit	817927-L21
	HP DL380 Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W) FIO Processor Kit	817925-L21
	HP DL380 Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W) FIO Processor Kit	817923-L21
	HPE DL380 Gen9 Intel® Xeon® E5-2687Wv4 (3.0GHz/12-core/30MB/160W) FIO Processor Kit	817957-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	<b>NOTE:</b> This processor is not supported in a 12LFF or 24LFF CTO Server + Rear drive.	
	HPE DL380 Gen9 Intel® Xeon® E5-2699v4 (2.2GHz/22-core/55MB/145W) FIO Processor Kit	817967-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2698v4 (2.2GHz/20-core/50MB/135W) FIO Processor Kit	817965-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2697v4 (2.3GHz/18-core/45MB/145W) FIO Processor Kit	817963-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2697Av4 (2.6GHz/16-core/40MB/145W) FIO Processor Kit	817955-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2695v4 (2.1GHz/18-core/45MB/120W) FIO Processor Kit	817961-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2690v4 (2.6GHz/14-core/35MB/135W) FIO Processor Kit	817959-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2683v4 (2.1GHz/16-core/40MB/120W) FIO Processor Kit	817953-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2680v4 (2.4GHz/14-core/35MB/120W) FIO Processor Kit	817951-L21
	<b>NOTE:</b> Ships with a High Performance Heatsink.	
	HPE DL380 Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) FIO Processor Kit	817945-L21
	HPE DL380 Gen9 Intel® Xeon® E5-2650v4 (2.2GHz/12-core/30MB/105W) FIO Processor Kit	817943-L21
	HPE DL380 Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) FIO Processor Kit	817937-L21

## Configuration Information - Factory Integrated Models

HPE DL380 Gen9 Intel® Xeon® E5-2667v4 (3.2GHz/8-core/25MB/135W) FIO Processor Kit 817947-L21

**NOTE:** Ships with a High Performance Heatsink.

HPE DL380 Gen9 Intel® Xeon® E5-2630v4 (2.2GHz/10-core/25MB/85W) FIO Processor Kit 817933-L21

**NOTE:** If two processors are desired, select one xxxxxx-L21 and one corresponding xxxxxx-B21.

**NOTE:** Up to two processors supported. Mixing different processor models is not supported.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** v4 Processor requires PC4-2400T Memory Kits.

**NOTE:** For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

### HPE Memory

**NOTE:** Select one or more memory from below

**NOTE:** LRDIMM and RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.

**NOTE:** HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant server. HP Smart Memory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9

**NOTE:** If only one processor is installed only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.

**NOTE:** Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>

**NOTE:** Depending on the memory configuration and processor model, the memory speed may run at 2400MHz, 2133MHz, 1866MHz, 1600MHz, or 1333MHz. Please see Memory Population Table or Online Memory Configuration Tool at: <http://www.hp.com/go/ddr4config>

#### Registered DIMMs (RDIMMs) for E5-2600v4 Series

HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805347-B21

HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805349-B21

HP 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 836220-B21

HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805351-B21

#### Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series

HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit 805353-B21

HP 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit 805358-B21

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory Kit 809208-B21

#### HPE Persistent Memory (NVDIMM)

**NOTE:** The following memory is supported by the E5-2600v4 series Processor only.

HPE 8GB NVDIMM Single Rank x4 DDR4-2133 Module 782692-B21

**NOTE:** NVDIMMs are only supported with E5-2600v4 processors, excluding field upgrades from E5-2600v3 to E5-2600v4.

**NOTE:** A maximum of 16 NVDIMMs supported.

**NOTE:** Can only be mixed with RDIMMs.

**NOTE:** Depending on Processor selected this memory will run at 2133MHz maximum.

### HPE Power Supplies

**NOTE:** Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

**NOTE:** Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.

## Configuration Information - Factory Integrated Models

### HPE Flex Slot Platinum Hot-Plug Power Supplies

HP 500W Flex Slot Platinum Hot Plug Power Supply Kit 720478-B21

HP 800W Flex Slot Platinum Hot Plug Power Supply Kit 720479-B21

HP 800W Flex Slot Titanium Hot Plug Power Supply Kit 720482-B21

**NOTE:** Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

HP 800W Flex Slot Universal Hot Plug Power Supply Kit 720484-B21

**NOTE:** Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.

HP 800W Flex Slot -48VDC Hot Plug Power Supply Kit 720480-B21

**NOTE:** Flex Slot -48VDC power supplies support power efficiency of up to 94%.

HP 1400W Flex Slot Platinum Plus Hot Plug Power Supply Kit 720620-B21

HP 750W Flex Slot Hot Plug Battery Backup Module 738024-B21

**NOTE:** Flex Slot Battery Backup provides 750W output and 500W in paralleled configuration.

**NOTE:** Only 1 Battery Backup module per server, and a Flex Slot Power Supply needed in parallel.

**NOTE:** The above power supply options are all 80Plus Platinum-certified with an efficiency rating of up to 94%. Support for HPE Power Discovery Services is included with the 1400W Flex Slot option. Power specifications and technical content for all HPE Server power supplies can be found at: <http://www.hp.com/go/proliant/powersupply>

### Step 3: Choose Additional Factory Integratable Options (only one of the following from each list unless otherwise noted)

#### HPE Storage Controllers

**NOTE:** The embedded B140i controller will be used as the primary controller if no controller is selected from the list below. Embedded SATA controller can support up to 8 SATA hard drives. Cable Kit may be required.

#### HPE Flexible Smart Array Controllers

HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int FIO SAS Controller 749974-B21

**NOTE:** Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.

**NOTE:** Includes the HP Smart Storage Battery.

#### HPE Smart Array Controllers

HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller 761872-B21

**NOTE:** Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.

**NOTE:** Includes the HP Smart Storage Battery.

HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller 761874-B21

**NOTE:** Includes the HP Smart Storage Battery.

#### HPE Smart Host Bus Adapters

HP H240ar 12Gb 2-ports Int FIO Smart Host Bus Adapter 749976-B21

**NOTE:** Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.

#### HPE Cable Options

HP DL380 Gen9 12LFF Rear 2SFF or 3LFF P840/440 SAS Cable Kit 783007-B21

HP DL380 Gen9 2SFF Front SAS x4 Cable Kit 783008-B21

**NOTE:** Required for front mount 2SFF to H240/P440ar, H240 or embedded B140i SATA controller.

HP DL380 Gen9 8SFF SAS Cable Kit 783009-B21

**NOTE:** Required for 8/16/24 SFF models for use with P840/440 controllers.

HP DL380 Gen9 2SFF x8 Front Cable Kit 785989-B21

**NOTE:** Required for front/rear mount 2SFF to P440/840 PCIe controller.

## Configuration Information - Factory Integrated Models

	HP DL380 Gen9 12LFF SAS Cable Kit <b>NOTE:</b> Required for 12LFF models with P440/840 PCIe controllers.	785991-B21
	HP DL380 Gen9 8SFF H240 Cable Kit <b>NOTE:</b> Required for 8/16/24 SFF models for use with H240/P440ar, H240 PCIe or embedded B140i SATA controller.	786092-B21
	HP DL380 Gen9 12LFF H240 SAS Cable Kit <b>NOTE:</b> Required for 12LFF models with H240/P440ar, H240 or embedded B140i SATA controller.	786215-B21
<b>BIOS Mode</b>	HP Legacy FIO Mode Setting <b>NOTE:</b> If selected, then B140i will not be supported and can no longer be a primary controller, therefore SAS internal controller must be selected to be the primary controller.	758959-B22
<b>Controller State</b>	HP FIO Enable B140i Setting <b>NOTE:</b> Must be selected when B140i is used as primary controller and RAID is desired.	784308-B21
	HP Mfg FIO Enable HBA Mode Setting <b>NOTE:</b> When selected if H240ar/H240 are used as the primary controller then RAID is not allowed.	792962-B21
<b>HPE Unique Options</b>	HP 2SFF Front SPEC Perf FIO Mount <b>NOTE:</b> May only be selected with 8SFF CTO Server and optical media cage kit and 2SFF Drive cage option. When this option is selected, a primary controller is not required for the 8SFF CTO Server.	787945-B21
<b>HPE Insight Software</b>	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
<b>HPE Converged Infrastructure Management Software</b>	<b>HPE OneView Advanced (with iLO Advanced)</b> HP OneView for ProLiant DL Server incl 3 yr 24x7 Supp FIO Bundle Physical 1 Svr Lic <b>HPE OneView Advanced (without HPE iLO Advanced)</b> HP OneView w/o iLO including 3yr 24x7 Support FIO 1 Server LTU	E5Y43A P8B31A

### Step 4: Choose Additional Options for Factory Integration from Core and Additional Options sections below

**CAUTION:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation

## Core Options

### Recommended Options

Offering the best combination of performance, value and availability, Recommended Options have been selected by HPE experts to provide the right technology for a range of workloads and market segments. Fully integrated into the HPE management and security experience, Recommended Options provide the best fit with timely availability.

### Extended Options

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the HPE management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Unique Options	Recommended	
	HPE DL380 Gen9 NVMe 6 Solid State Drive Express Bay Enablement Kit (Recommended)	774741-B21
	<b>NOTE:</b> This option provides support for up to 6NVMe drives, and can only be populated in BAY2 in SFF chassis only, can be used with Bay1 and Bay 3 populated.	
	<b>NOTE:</b> The HPE DL380 Gen9 High Performance Fan Kit is required for NVMe support (719079-B21).	
	<b>NOTE:</b> The PCIe card in this enablement kit can only be populated in slot2 (primary) or slot 5 (secondary).	
	<b>NOTE:</b> For true x16 support with this option a secondary riser (719073-B21) is needed (second processor required).	
	<b>NOTE:</b> Kit includes Mylar film for Universal Media Bay (724865-B21) support to ensure optimal airflow.	
	<b>NOTE:</b> For NVME CTO support, please use the NVME model (810393-B21), this kit is for field upgrades only.	
	<b>NOTE:</b> There are limitations on GPU support with the NVMe bay installed.	
	HPE DL380 Gen9 Universal Media Bay Kit (Recommended)	724865-B21
	<b>NOTE:</b> The HPE DL380 Gen9 Universal Media bay provides front VGA and 2xUSB 2.0; plus support for 2xSFF front drives (724864-B21) and ODD support (No included); and can only be located in Bay1 in either an 8SFF or 8+8SFF front end.	
	HPE DL380 Gen9 GPU Enablement Kit (Recommended)	719082-B21
	<b>NOTE:</b> This kit includes alternative 2 heatsinks plus 6 cables to enable GPU support. Other limitations apply, see Graphic section for more details.	
	<b>NOTE:</b> We support up to 2 Double wide and 3 single wide Graphics cards, limitations apply.	
	<b>NOTE:</b> Double Wide GPUs will occupy slots 2 and 5 and will leave only 2 slots left open.	
	<b>NOTE:</b> There are limitations on GPU support with the NVMe bay installed.	
	HPE DL380 Gen9 High Performance Temperature Fan Kit (Recommended)	719079-B21
	<b>NOTE:</b> This kit is required for specific Ambient temperature environments, more details here: <a href="http://www.hpe.com/servers/ashrae">http://www.hpe.com/servers/ashrae</a>	
	<b>NOTE:</b> This kit is also required to support Passive GPUs.	
	<b>NOTE:</b> This kit provides max cooling for your Server.	
	HPE DL380 Gen9 2SFF Front/Rear SAS/SATA Kit (Recommended)	724864-B21
	<b>NOTE:</b> For 2SFF front the Universal Media Bay (724865-B21) is required.	

## Core Options

**NOTE:** 2SFF in the rear is only supported with a 24SFF (CTO server or field upgraded) or 12LFF (719061-B21) model.

**NOTE:** Rear drives will not support higher than 160W CPUs and other special/unique CPUs.

HPE DL380 Gen9 3LFF Rear SAS/SATA Kit (Recommended) 768856-B21

**NOTE:** This is only supported in the 12LFF model (CTO or Pre-configured models).

**NOTE:** 3LFF rear drives will consume the 2nd riser expansion slot.

**NOTE:** Rear drives will not support higher than 160W CPUs and other special/unique CPUs.

HPE DL380 Gen9 Primary 2 Slot GPU Ready Riser Kit (Recommended) 719076-B21

Slot1: 1x Gen3 x16 FH/FL, 1xGen3 x8 FH/HL.

**NOTE:** This replaces the standard Primary riser in slot1.

HPE DL380 Gen9 Secondary 3 Slot GPU Ready Riser Kit (Recommended) 719073-B21

Slot2: 2xGen3 x16 FH/FL, 1xGen3 x8 FH/HL.

HPE DL380 Gen9 8SFF Bay1 Cage/Backplane Kit (Recommended) 719067-B21

**NOTE:** To add an additional 8SFF drive cage in Bay1.

**NOTE:** To get to 16SFF total please populate bay 2 with 768857-B21 (from an 8SFF starting point).

**NOTE:** This ships with 6 High Efficiency Fans.

**NOTE:** Selecting this option does not allow you to select the Universal Media Bay.

HPE DL380 Gen9 Additional 8SFF Bay2 Cage/Backplane Kit (Recommended) 768857-B21

**NOTE:** To add an additional 8SFF drive cage in Bay 2. This is the optimal solution to upgrade to 16SFF total and allows the flexibility to add the Universal Media Bay (724865-B21) for 2 additional SFF or Optical.

HPE DL380 Gen9 Systems Insight Display Kit (Recommended) 768900-B21

**NOTE:** The Systems Insight Display no longer ships as standard but is available as a Factory Integrated or field upgrade option.

HPE DL380 Gen9 Rear Serial Port and Enablement Kit (Recommended) 768896-B21

HPE DL380 Gen9 P440ar/H240ar Riser 2 SAS Expander Kit (Recommended) 844115-B21

**NOTE:** Cable kit required to support the SAS Expander (727250-B21) in the secondary riser (719073-B21) with the P840ar or P440ar.

HPE 12Gb SAS Expander Card with Cables for DL380 Gen9 727250-B21

**NOTE:** SAS expander to enable 24SFF field upgrade.

**NOTE:** Primary population in slot2 or 3 of the Primary Riser.

## HPE Processors

### E5-2600v4 series Processors - Recommended

HPE DL380 Gen9 Intel Xeon E5-2643v4 (3.4GHz/6-core/20MB/135W) Processor Kit (Recommended) 817939-B21

**NOTE:** Ships with a High Performance Heatsink.

HPE DL380 Gen9 Intel Xeon E5-2620v4 (2.1GHz/8-core/20MB/85W) Processor Kit (Recommended) 817927-B21

HPE DL380 Gen9 Intel Xeon E5-2690v4 (2.6GHz/14-core/35MB/135W) Processor Kit (Recommended) 817959-B21

**NOTE:** Ships with a High Performance Heatsink.

HPE DL380 Gen9 Intel Xeon E5-2680v4 (2.4GHz/14-core/35MB/120W) Processor Kit (Recommended) 817951-B21

## Core Options

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2660v4 (2.0GHz/14-core/35MB/105W) Processor Kit (Recommended) 817945-B21

HPE DL380 Gen9 Intel Xeon E5-2650v4 (2.2GHz/12-core/30MB/105W) Processor Kit (Recommended) 817943-B21

HPE DL380 Gen9 Intel Xeon E5-2640v4 (2.4GHz/10-core/25MB/90W) Processor Kit (Recommended) 817937-B21

HPE DL380 Gen9 Intel Xeon E5-2667v4 (3.2GHz/8-core/25MB/135W) Processor Kit (Recommended) 817947-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2630v4 (2.2GHz/10-core/25MB/85W) Processor Kit (Recommended) 817933-B21

### **E5-2600v4 series Processors - Extended**

HPE DL380 Gen9 Intel Xeon E5-2650Lv4 (1.7GHz/14-core/35MB/65W) Processor Kit (Extended) 817941-B21

HPE DL380 Gen9 Intel Xeon E5-2630Lv4 (1.8GHz/10-core/25MB/55W) Processor Kit (Extended) 817931-B21

HPE DL380 Gen9 Intel Xeon E5-2609v4 (1.7GHz/8-core/20MB/85W) Processor Kit (Extended) 817925-B21

**NOTE: This processor does not support Hyper-Threading.**

HPE DL380 Gen9 Intel Xeon E5-2603v4 (1.7GHz/6-core/15MB/85W) Processor Kit (Extended) 817923-B21

**NOTE: This processor does not support Hyper-Threading.**

HPE DL380 Gen9 Intel Xeon E5-2637v4 (3.5GHz/4-core/15MB/135W) Processor Kit (Extended) 817935-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2623v4 (2.6GHz/4-core/10MB/85W) Processor Kit (Extended) 817929-B21

HPE DL380 Gen9 Intel Xeon E5-2687Wv4 (3.0GHz/12-core/30MB/160W) Processor Kit (Extended) 817957-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2699v4 (2.2GHz/22-core/55MB/145W) Processor Kit (Extended) 817967-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2698v4 (2.2GHz/20-core/50MB/135W) Processor Kit (Extended) 817965-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2697v4 (2.3GHz/18-core/45MB/145W) Processor Kit (Extended) 817963-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2697Av4 (2.6GHz/16-core/40MB/145W) Processor Kit (Extended) 817955-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2683v4 (2.1GHz/16-core/40MB/120W) Processor Kit (Extended) 817953-B21

**NOTE: Ships with a High Performance Heatsink.**

HPE DL380 Gen9 Intel Xeon E5-2699Av4 (2.4GHz/22-core/55MB/145W) Processor Kit (Extended) 871026-B21

## Core Options

### E5-2600v3 series Processors - Extended

HPE DL380 Gen9 Intel Xeon E5-2690v3 (2.6GHz/12-core/30MB/135W) Processor Kit 719044-B21 (Extended)

**NOTE:** Ships with a High Performance Heatsink.

**NOTE:** Up to 2 processors supported. Performance and Energy Star Model configurations include two processors.

**NOTE:** HT indicates that the processor model supports Intel® Hyper-Threading Technology.

**NOTE:** Turbo2: Intel® Turbo Boost Technology 2.0 provides more computing power when you need it with performance that adapts to spikes in your workload and delivers more performance upside than the previous generation turbo technology.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

**NOTE:** The xxxxxx-B21 is the 2nd processor and ships with 2 additional FANs for factory or field installation.

**NOTE:** Double wide PCIe cards are only supported in risers with the Processors leveraging the High Performance Heatsink. For Processors requiring double wide GPU support please order the GPU enablement kit (719082-B21).

**NOTE:** Mixing of E5-2600v3 and E5-2600v4 Processors is not supported.

**NOTE:** Field upgrade from E5-2600v3 to E5-2600v4 is supported.

## HPE Memory

### Registered DIMMs (RDIMMs) for E5-2600v3 Series - Extended

**NOTE:** The following memory is supported by the E5-2600v3 series Processors.

HPE 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726718-B21 (Extended)

HPE 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 726719-B21 (Extended)

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit 728629-B21 (Extended)

**NOTE:** Depending on Processor selected this memory will run at 1600, 1866 or 2133MHz.

**NOTE:** Mixing of DIMM types is not supported.

**NOTE:** Mixing of 2133 and 2400MHz DIMMs is not supported.

### Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series - Extended

**NOTE:** The following memory is supported by the E5-2600v3 series Processors.

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit (Extended) 726724-B21

**NOTE:** Depending on Processor selected this memory will run at 1600, 1866 or 2133MHz.

**NOTE:** Mixing of DIMM types is not supported.

**NOTE:** Mixing of 2133 and 2400MHz DIMMs is not supported.

### Registered DIMMs (RDIMMs) for E5-2600v4 Series - Recommended

**NOTE:** The following memory is supported by the E5-2600v4 series Processor only.

HPE 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805349-B21 (Recommended)

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805351-B21 (Recommended)

### Registered DIMMs (RDIMMs) for E5-2600v4 Series - Extended

HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit 805347-B21 (Extended)

HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit 836220-B21 (Extended)

## Core Options

**NOTE:** Depending on Processor selected this memory will run at 1866, 2133 or 2400MHz.

**NOTE:** Mixing of DIMM types is not supported.

**NOTE:** Mixing of 2133 and 2400MHz DIMMs is not supported.

### Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series - Recommended

**NOTE:** The following memory is supported by the E5-2600v4 series Processor only.

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit (Recommended)	805358-B21
---	------------

### Load Reduced DIMMs (LRDIMMs) for E5-2600v4 Series - Extended

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Load Reduced Memory Kit (Extended)	805353-B21
--	------------

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2400 CAS-20-18-18 Load Reduced Memory Kit (Extended)	809208-B21
---	------------

**NOTE:** Depending on Processor selected this memory will run at 1866, 2133 or 2400MHz.

**NOTE:** These LRDIMMs do not support NVDIMMs.

**NOTE:** Mixing of DIMM types is not supported.

**NOTE:** Mixing of 2133 and 2400MHz DIMMs is not supported.

**NOTE:** Mixing the 128GB LRDIMM with other capacities is not supported.

### HPE Persistent Memory (NVDIMM) - Recommended

**NOTE:** The following memory is supported by the E5-2600v4 series Processor only.

HPE 8GB NVDIMM Single Rank x4 DDR4-2133 Module (Recommended)	782692-B21
--	------------

**NOTE:** NVDIMMs are only supported with E5-2600v4 processors, excluding field upgrades from E5-2600v3 to E5-2600v4.

**NOTE:** A maximum of 16 NVDIMMs supported.

**NOTE:** Can only be mixed with RDIMMs.

**NOTE:** Depending on Processor selected this memory will run at 2133MHz maximum.

### HPE Optical Drives Recommended

HPE 9.5mm SATA DVD-ROM Optical Drive (Recommended)	726536-B21
--	------------

**NOTE:** The Universal Media Bay (724865-B21) is required for this option.

HPE 9.5mm SATA DVD-RW Optical Drive (Recommended)	726537-B21
---	------------

**NOTE:** The Universal Media Bay (724865-B21) is required for this option.

HPE Mobile USB DVD-RW Optical Drive (Recommended)	701498-B21
---	------------

**NOTE:** This is only supported on USB 3.0 ports.

### HPE Drives

#### SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives - Recommended

HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Recommended)	881457-B21
--	------------

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Recommended)	872481-B21
--	------------

HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended)	872479-B21
---	------------

HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended)	870759-B21
---	------------

HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended)	870757-B21
---	------------

HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended)	872477-B21
---	------------

## Core Options

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended)	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD (Recommended)	872475-B21
<b>SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives - Extended</b>	
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD (Extended)	870765-B21
<b>SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives - Recommended</b>	
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD (Recommended)	765466-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended)	765464-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	832514-B21
<b>12G SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives - Recommended</b>	
HPE 600GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD (Recommended)	P04695-B21
HPE 300GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD (Recommended)	P04693-B21
<b>12G SAS Hot Plug LFF (3.5-inch) SC Midline Hard Drives - 1yr Warranty - Recommended</b>	
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended)	819201-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	872487-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	872487-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	872485-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	872485-B21
<b>12G SAS Hot Plug LFF (3.5-inch) SC Midline Hard Drives - 1yr Warranty - Extended</b>	
HPE 10TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD (Extended)	857644-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Extended)	846514-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD (Extended)	861754-B21
HPE 1TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Extended)	846524-B21
<b>SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives - Recommended</b>	
HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended)	765455-B21
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	655710-B21
<b>SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives - Recommended</b>	
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD (Recommended)	819203-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD (Recommended)	861750-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	872491-B21

## Core Options

HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Recommended)	872491-B21
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD (Recommended)	861691-B21
<b>SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives - Extended</b>	
HPE 12TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD (Extended)	881785-B21
HPE 10TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD (Extended)	857648-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Extended)	872489-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD (Extended)	872489-B21
<b>SSD Selection</b>	
To streamline the configuration process for HPE ProLiant Gen9 servers and to provide the best product availability, HPE recommends SSDs from the list located here: <a href="http://www.hpe.com/products/recommend">http://www.hpe.com/products/recommend</a> .	
<b>12G SAS Mixed Use Hot Plug SFF (2.5-inch) Solid State Drives - Recommended</b>	
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	873367-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	873365-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872382-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	873363-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872376-B21
HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	873359-B21
HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872374-B21
<b>12G SAS Mixed Use Hot Plug SFF (2.5-inch) Solid State Drives - Extended</b>	
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	872386-B21
<b>12G SAS Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives - Recommended</b>	
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872394-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872392-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875326-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872390-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875313-B21
HPE 480GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875311-B21
<b>12G SAS Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives - Extended</b>	
HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	870148-B21

## Core Options

HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	870144-B21
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	875330-B21
<b>12G SAS Hot Plug MU-3 SFF (3.5-inch) SC Solid State Drives - Extended</b>	
HPE 800GB SAS 12G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended)	872378-B21
<b>12G SAS Hot Plug SFF (2.5-inch) Write Intensive Solid State Drives - Recommended</b>	
HPE 800GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	873355-B21
HPE 400GB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	873351-B21
<b>12G SAS Hot Plug SFF (2.5-inch) Write Intensive Solid State Drives - Extended</b>	
HPE 1.6TB SAS 12G Write Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	873357-B21
<b>6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives - Recommended</b>	
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P06198-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875513-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P04566-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P06196-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875511-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P04564-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P06194-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875509-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P04560-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875503-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P04556-B21
<b>6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives - Extended</b>	
HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877764-B21
HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	P06200-B21
HPE 3.8TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	868830-B21
HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	P04570-B21
HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877758-B21

## Core Options

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877752-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877746-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877740-B21
<b>Read Intensive - 6G SATA - M.2 - Solid State Drives - Recommended</b>	
HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD (Recommended)	875498-B21
<b>Read Intensive - 6G SATA - M.2 - Solid State Drives - Extended</b>	
HPE 960GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended)	875500-B21
<b>6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives - Recommended</b>	
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872352-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875478-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872348-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875474-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	872344-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875470-B21
HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	875483-B21
HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Recommended)	P00896-B21
<b>6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives - Extended</b>	
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877788-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877782-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	877776-B21
HPE 240GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD (Extended)	880295-B21
<b>Mixed Use - 6G SATA - M.2 - Solid State Drives - Recommended</b>	
HPE 240GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Recommended)	875488-B21
<b>Mixed Use - 6G SATA - M.2 - Solid State Drives - Extended</b>	
HPE 960GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended)	875492-B21
HPE 480GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD (Extended)	875490-B21
<b>6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives - Extended</b>	
HPE 1.92TB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended)	877760-B21

## Core Options

HPE 960GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended) 877754-B21

HPE 480GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended) 877748-B21

### **6G SATA Hot Plug LFF (3.5-inch) SC Mixed Use Solid State Drives - Recommended**

HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Recommended) 875480-B21

HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Recommended) 872350-B21

HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD 875476-B21

HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD 875472-B21

### **6G SATA Hot Plug LFF (3.5-inch) SC Mixed Use Solid State Drives - Extended**

HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended) 877790-B21

HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended) 877784-B21

HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended) P03691-B21

HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD (Extended) 872346-B21

### **HPE NVMe PCIe Read Intensive SFF (2.5 inch) Solid State Drives - Recommended**

HPE 2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 877986-B21

HPE 375GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 878014-B21

**NOTE: With NVMe support only 1xDouble Wide Graphics card is supported.**

### **HPE NVMe PCIe Read Intensive SFF (2.5 inch) Solid State Drives - Extended**

HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875591-B21

HPE 1TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 877984-B21

HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875589-B21

HPE 480GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875587-B21

### **HPE NVMe PCIe Mixed Use SFF (2.5 inch) Solid State Drives - Recommended**

HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 877994-B21

HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 875595-B21

HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Recommended) 875593-B21

### **HPE NVMe PCIe Mixed Use SFF (2.5 inch) Solid State Drives - Extended**

HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 877998-B21

HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD (Extended) 875597-B21

**NOTE: With NVMe support only 1xDouble Wide Graphics card is supported.**

## Core Options

**NOTE:** The NVMe CTO chassis (810393-B21) or the NVMe Express Bay Enablement kit (774741-B21) are required to support these drives.

**NOTE:** HPE has qualified the NVMe drive portfolio using the Operating System inbox drivers, full detail on the [HPE Solid State Drive QuickSpecs](#).

**NOTE:** With NVMe support only 1xDouble Wide Graphics card is supported.

### M.2 SSD - Recommended

HPE Universal SATA HHHL 3yr Wty M.2 Kit (Recommended) 878783-B21

**NOTE:** M.2 drives go in PCIe slots and use B140i SATA controller only.

**NOTE:** M.2 supports Software RAID only.

**NOTE:** No HPE Flexible Smart Array supported.

### Hard Drive Blank Kits - Recommended

HPE Large Form Factor Hard Drive Blank Kit (Recommended) 666986-B21

HPE Small Form Factor Hard Drive Blank Kit (Recommended) 666987-B21

### Hard Drive Kits - Recommended

HPE DL380 Gen9 NVMe 6 Solid State Drive Express Bay Enablement Kit (Recommended) 774741-B21

**NOTE:** This option provides support for up to 6NVMe drives, and can only be populated in BAY2 in SFF chassis only, can be used with Bay1 and Bay 3 populated.

**NOTE:** The HPE DL380 Gen9 High Performance Fan Kit is required for NVMe support (719079-B21).

**NOTE:** The PCIe card in this enablement kit can only be populated in slot2 (primary) or slot 5 (secondary).

**NOTE:** For true x16 support with this option a secondary riser (719073-B21) is needed (second processor required).

**NOTE:** Kit includes Mylar film for Universal Media Bay (724865-B21) support to ensure optimal airflow.

HPE DL380 Gen9 8SFF Bay1 Cage/Backplane Kit (Recommended) 719067-B21

HPE DL380 Gen9 Additional 8SFF Bay2 Cage/Backplane Kit (Recommended) 768857-B21

HPE DL380 Gen9 2SFF Front/Rear SAS/SATA Kit (Recommended) 724864-B21

HPE DL380 Gen9 3LFF Rear SAS/SATA Kit (Recommended) 768856-B21

**NOTE:** For a complete list of the drive, controller and cable options please check the compatibility matrix:

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA5-4154ENW&cc=us&lc=en>

### Media Bay Kits - Recommended

HPE DL380 Gen9 Universal Media Bay Kit (Recommended) 724865-B21

**NOTE:** The Universal Media Bay offers front VGA and 2xUSB 2.0, plus ability to add optional Optical drive, and 2SFF.

**NOTE:** This is only compatible with the 8SFF or 8+8 SFF front end configurations and can only be populated in Bay1.

---

## HPE Networking

### 1 Gigabit Ethernet adapters - Recommended

HPE Ethernet 1Gb 4-port 331T Adapter (Recommended) 647594-B21

HPE Ethernet 1Gb 4-port 366T Adapter (Recommended) 811546-B21

### 1 Gigabit Ethernet adapters - Extended

HPE Ethernet 1Gb 2-port 332T Adapter (Extended) 615732-B21

HPE Ethernet 1Gb 2-port 361T Adapter (Extended) 652497-B21

### 10 Gigabit Ethernet adapters - Recommended

## Core Options

HPE Ethernet 10Gb 2-port 530SFP Adapter (Recommended) 652503-B21

HPE Ethernet 10Gb 2-port 530T Adapter (Recommended) 656596-B21

### 10 Gigabit Ethernet adapters - Extended

HPE Ethernet 10Gb 2-port 546SFP+ Adapter (Extended) 779793-B21

HPE Ethernet 10Gb 2-port 560SFP+ Adapter (Extended) 665249-B21

HPE Ethernet 10Gb 2-port 561T Adapter (Extended) 716591-B21

HPE Ethernet 10Gb 2-port 562SFP+ Adapter (Extended) 727055-B21

**NOTE:** The DL380 Gen9 chassis ships with 4x1Gb Embedded.

**NOTE:** A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

**NOTE:** Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <http://www.hpe.com/servers/ProLiantNICs>

### 25 Gigabit Ethernet adapters - Recommended

HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter (Recommended) 817753-B21

### FlexibleLOM Adapters - Recommended

HPE Ethernet 1Gb 4-port 331FLR Adapter (Recommended) 629135-B22

HPE Ethernet 1Gb 4-port 366FLR Adapter (Recommended) 665240-B21

HPE FlexFabric 10Gb 2-port 533FLR-T Adapter (Recommended) 700759-B21

HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter (Recommended) 700751-B21

HPE FlexFabric 10Gb 4-port 536FLR-T Adapter (Recommended) 764302-B21

HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter (Recommended) 817749-B21

### FlexibleLOM Adapters - Extended

HPE Ethernet 10Gb 2-port 546FLR-SFP+ Adapter (Extended) 779799-B21

HPE FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter (Extended) 727060-B21

HPE Ethernet 10Gb 2-port 560FLR-SFP+ Adapter (Extended) 665243-B21

HPE Ethernet 10Gb 2-port 561FLR-T Adapter (Extended) 700699-B21

HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter (Extended) 727054-B21

**NOTE:** The DL380 Gen9 chassis ships with 4x1Gb Embedded.

**NOTE:** Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.

**NOTE:** Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information: <http://www.hpe.com/servers/ProLiantNICs>

## HPE InfiniBand

**NOTE:** The RHEL6.5 driver is not part of SPP, but may be downloaded here: <http://h20565.www2.hpe.com/portal/site/hpsc/>.

### Recommended

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter (Recommended) 764285-B21

HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter (Recommended) 829335-B21

HPE InfiniBand EDR 100Gb 1-port 841QSFP28 Adapter (Recommended) 872725-B21

HPE InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter (Recommended) 872726-B21

### Extended

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter (Extended) 764284-B21

## Core Options

HPE InfiniBand QDR/Ethernet 10Gb 2-port 544+FLR-QSFP Adapter (Extended)	764286-B21
HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter (Extended)	825110-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter (Extended)	825111-B21

### HPE I/O Expansion Options **Recommended**

HPE DL380 Gen9 Primary 2 Slot GPU Ready Riser Kit (Recommended)	719076-B21
<p><b>NOTE:</b> This is for slot 1 and supports double wide GPGPUs.</p> <p><b>NOTE:</b> For Graphics cards please also order the DL380 Gen9 Graphics Enablement kit, 719082-B21.</p> <p>Slot1: 1xGen3 x16 FH/FL, 1xGen3 x8 FH/HL.</p> <p><b>NOTE:</b> Double wide PCIe cards are only supported in risers with the Processors leveraging the High Performance Heatsink. For Processors requiring double wide GPU support please order the GPU enablement kit (719082-B21).</p>	
HPE DL380 Gen9 Secondary 3 Slot GPU Ready Riser Kit (Recommended)	719073-B21
<p><b>NOTE:</b> This is for slot 2 and supports double wide GPGPUs.</p> <p><b>NOTE:</b> For Graphics cards please also order the DL380 Gen9 Graphics Enablement kit, 719082-B21.</p> <p>Slot2: 2xGen3 x16 FH/FL, 1xGen3 x8 FH/HL.</p> <p><b>NOTE:</b> Double wide PCIe cards are only supported in risers with the Processors leveraging the High Performance Heatsink. For Processors requiring double wide GPU support please order the GPU enablement kit (719082-B21).</p>	

### HPE Power Supplies

#### HPE Flex Slot Platinum Hot-plug Power supplies - Recommended

HPE 500W Flex Slot Platinum Hot Plug Power Supply Kit (Recommended)	720478-B21
<p><b>NOTE:</b> Flex Slot Platinum power supplies support power efficiency of up to 94%.</p>	
HPE 800W Flex Slot Platinum Hot Plug Power Supply Kit (Recommended)	720479-B21
<p><b>NOTE:</b> Flex Slot Platinum power supplies support power efficiency of up to 94%.</p>	
HPE 800W Flex Slot -48VDC Hot Plug Power Supply Kit (Recommended)	720480-B21
<p><b>NOTE:</b> Flex Slot -48VDC power supplies support power efficiency of up to 94%.</p>	
HPE 1400W Flex Slot Platinum Plus Hot Plug Power Supply Kit (Recommended)	720620-B21
<p><b>NOTE:</b> Flex Slot Platinum Plus power supplies support power efficiency of up to 94%.</p>	

#### HPE Flex Slot Platinum Hot-plug Power supplies - Extended

HPE 800W Flex Slot Titanium Hot Plug Power Supply Kit (Extended)	720482-B21
<p><b>NOTE:</b> Flex Slot Titanium power supplies support power efficiency of up to 96%.</p> <p><b>NOTE:</b> All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.</p> <p><b>NOTE:</b> Mixing different power supplies in the same server may limit or disable some power supply features including support for power redundancy. To ensure access to all available features, all power supplies within the same server should have the same output and efficiency ratings.</p> <p><b>NOTE:</b> Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <a href="http://www.hpe.com/info/hppoweradvisor">http://www.hpe.com/info/hppoweradvisor</a>.</p> <p><b>NOTE:</b> Support for HPE Power Discovery Services is included with the 1400W Flex Slot option. Power specifications and technical content for all HPE Server power supplies can be found at <a href="http://www.hpe.com/info/proliant/powersupply">http://www.hpe.com/info/proliant/powersupply</a>.</p> <p><b>NOTE:</b> Maximum of 2 Flex Slot PS per platform.</p>	

## Core Options

<b>HPE Computation and Graphics Accelerators</b>	<p><b>Recommended</b></p> <p>HPE DL380 Gen9 GPU Enablement Kit (Recommended) <span style="float: right;">719082-B21</span></p> <p><b>NOTE:</b> This GPU enablement kit includes 2 Heatsinks and 8 cables to enable double wide GPUs to be supported.</p> <p><b>NOTE:</b> For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card for cards over 150W. Cards 150W or under can use 800W Power Supplies; however check the power usage via the HPE Power Advisor Tool located at <a href="http://www.hpe.com/info/hppoweradvisor">http://www.hpe.com/info/hppoweradvisor</a>.</p> <p><b>NOTE:</b> There are limitations on the server model and processor supported when adding Graphics accelerators.</p> <p><b>NOTE:</b> Passive cards will require the addition of the High Performance Fan Kit (719079-B21).</p> <p><b>NOTE:</b> We support up to 2 Double wide and 3 single wide Graphics cards, limitations apply.</p> <p><b>NOTE:</b> This kit support up to 2 double wide Graphics cards.</p> <p><b>NOTE:</b> Double Wide GPUs will occupy slots 2 and 5 and will leave only 2 slots left open.</p> <p><b>NOTE:</b> There are limitations on GPU support (1x double wide) with the NVMe bay installed.</p> <p><b>NOTE:</b> All Accelerators are restricted to less than 1024GB for system host memory, with the exception of the Tesla P100, AMD and Intel cards.</p> <p><b>NOTE:</b> This kit includes PCIe GPU Retention Brackets that need to be installed on the air baffle to support FL cards.</p> <p><b>NOTE:</b> Not required for M2000.</p>
	<p>NVIDIA Tesla M10 Quad GPU Module (Recommended) <span style="float: right;">Q0J62A</span></p> <p><b>NOTE:</b> This is supported in all server models, however with the following limitations: 4LFF supported to 35C, 8SFF supported to 35C, 12LFF supported to 30C, 16SFF+Universal Media bay supported to 35C, 16SFF+NVMe cage supported to 35C and 24SFF+2SFF supported to 35C.</p> <p><b>NOTE:</b> The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p><b>NOTE:</b> The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p><b>NOTE:</b> For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.</p> <p><b>NOTE:</b> Double-wide cards require the addition of the High Performance Fan Kit (719079-B21).</p> <p><b>NOTE:</b> Only supported with E5-2600v4 processors.</p>
	<p>HPE NVIDIA Tesla M60 Reverse Air Flow Dual GPU PCIe Graphics Accelerator (Recommended) <span style="float: right;">M3X67A</span></p> <p><b>NOTE:</b> Maximum 2 supported with both risers, support for 2 cards requires the 1400W Power Supply (720620-B21) to be selected.</p> <p><b>NOTE:</b> Double-wide cards require the addition of the High Performance Fan Kit (719079-B21).</p> <p><b>NOTE:</b> This card only runs at PCIeGen2 speeds.</p> <p><b>NOTE:</b> The Primary GPU riser (719076-B21) is required to support this in slot1.</p> <p><b>NOTE:</b> The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).</p> <p><b>NOTE:</b> There are limitations operating this card with a 160W processor with operative environment temperature limitations: 8SFF to 35°C, 16 SFF to 25°C and 24SFF/12LFF to 20°C</p> <p><b>NOTE:</b> Additional Grid 2.0 Licensing from NVIDIA is required.</p>

## Core Options

HPE NVIDIA Tesla P4 8GB Computational Accelerator (Recommended)	Q0V79A
<b>NOTE:</b> Maximum of 3 cards supported per server.	
<b>NOTE:</b> This is supported in all models.	
<b>NOTE:</b> The Primary GPU riser (719076-B21) is required to support this in slot1.	
<b>NOTE:</b> The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).	
<b>NOTE:</b> 1x 1400W PS recommended, but this card will work with 1x800W PS (Per GPU). However check the power usage via the HPE Power Advisor Tool located at <a href="http://www.hpe.com/info/hppoweradvisor">http://www.hpe.com/info/hppoweradvisor</a> .	
<b>NOTE:</b> No GPU enablement kit is required for this option.	
<b>NOTE:</b> Only supported with E5-2600v4 processors.	
HPE NVIDIA Tesla P40 24GB Computational Accelerator (Recommended)	Q0V80A
<b>NOTE:</b> There are server model limitations with this card: 4LFF supported to 35C, 8SFF supported to 35C, 12LFF supported to 25C , 16SFF+Universal Media bay supported to 30C, 16SFF+NVMe cage supported to 30C and 24SFF+2SFF supported to 30C.	
<b>NOTE:</b> For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.	
<b>NOTE:</b> The Primary GPU riser (719076-B21) is required to support this in slot1.	
<b>NOTE:</b> The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).	
<b>NOTE:</b> There are limitations on the server model and processor supported when adding Graphics accelerators.	
<b>NOTE:</b> This card will require the addition of the High Performance Fan Kit (719079-B21).	
<b>NOTE:</b> This card is supported on the E5-2600v4 series processors only.	
HPE NVIDIA Tesla P100 PCIe 16GB Computational Accelerator (Recommended)	Q0E21A
<b>NOTE:</b> There are server model limitations with this card: 4LFF supported to 25C, 8SFF supported to 30C, 12LFF not supported, 16SFF+Universal Media bay supported to 30C, 16SFF+NVMe cage supported to 30C and 24SFF+2SFF supported to 20C.	
<b>NOTE:</b> For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.	
<b>NOTE:</b> The Primary GPU riser (719076-B21) is required to support this in slot1.	
<b>NOTE:</b> The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).	
<b>NOTE:</b> There are limitations on the server model and processor supported when adding Graphics accelerators.	
<b>NOTE:</b> This card will require the addition of the High Performance Fan Kit (719079-B21).	
<b>NOTE:</b> This card is supported on the E5-2600v4 series processors only.	
HPE NVIDIA Quadro P2000 Graphics Accelerator (Recommended)	Q0V77A
<b>NOTE:</b> Only supported with E5-2600v4 processors.	
<b>NOTE:</b> This is supported in all models.	
<b>NOTE:</b> Support with this card limited to 35C for all server model permutations.	
<b>NOTE:</b> The Primary GPU riser (719076-B21) is required to support this in slot1.	
<b>NOTE:</b> The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).	
<b>NOTE:</b> 1x 1400W PS recommended, but this card will work with 1x800W PS (Per GPU). However check the power usage via the HPE Power Advisor Tool located at <a href="http://www.hpe.com/info/hppoweradvisor">http://www.hpe.com/info/hppoweradvisor</a> .	
HPE NVIDIA Quadro P4000 Graphics Accelerator (Recommended)	Q0V78A

## Core Options

**NOTE:** Only supported with E5-2600v4 processors.

**NOTE:** This is supported in all models.

**NOTE:** Support with this card limited to 35C for all server model permutations.

**NOTE:** The Primary GPU riser (719076-B21) is required to support this in slot1.

**NOTE:** The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).

**NOTE:** 1x 1400W PS recommended, but this card will work with 1x800W PS (Per GPU). However check the power usage via the HPE Power Advisor Tool located at <http://www.hpe.com/info/hppoweradvisor>.

HPE NVIDIA Quadro P6000 Graphics Accelerator (Recommended)

Q0V76A

**NOTE:** There are server model limitations with this card: 4LFF supported to 25C, 8SFF supported to 30C, 12LFF not supported, 16SFF+Universal Media bay supported to 30C, 16SFF+NvMe cage supported to 20C and 24SFF+2SFF supported to 20C.

**NOTE:** For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.

**NOTE:** The Primary GPU riser (719076-B21) is required to support this in slot1.

**NOTE:** The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).

**NOTE:** There are limitations on the server model and processor supported when adding Graphics accelerators.

**NOTE:** This card will require the addition of the High Performance Fan Kit (719079-B21).

**NOTE:** This card is supported on the E5-2600v4 series processors only.

HPE NVIDIA Tesla V100 PCIe 16GB Computational Accelerator (Recommended)

Q2N68A

HPE AMD FirePro S9150 Accelerator Kit (Recommended)

J0H11A

**NOTE:** For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.

**NOTE:** The Primary GPU riser (719076-B21) is required to support this in slot1.

**NOTE:** The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).

**NOTE:** There are limitations on the server model and processor supported when adding Graphics accelerators.

**NOTE:** This card will require the addition of the High Performance Fan Kit (719079-B21).

**NOTE:** This card is supported on the E5-2600v3 series processors only.

**NOTE:** 12LFF support is restricted to 30C Server Ambient only.

HPE AMD FirePro S7150x2 Accelerator Kit (Recommended)

M3X68A

**NOTE:** For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.

**NOTE:** The Primary GPU riser (719076-B21) is required to support this in slot1.

**NOTE:** The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).

**NOTE:** There are limitations on the server model and processor supported when adding Graphics accelerators.

**NOTE:** This card will require the addition of the High Performance Fan Kit (719079-B21).

**NOTE:** This card is supported on the E5-2600v4 series processors only.

**NOTE:** This card only runs at PCIeGen2 speeds.

**NOTE:** There are limitations operating this card with operative environment temperature limitations: 12LFF chassis to 30°C

## Core Options

**NOTE:** Each DL380 Gen9 server will accommodate up to three single-width or two double width PCIe cards for Computational Graphics support. Note that 11.25" is the max length for a card to also allow for cabling. This applies to primary slots 1 & 2 or secondary slots 4 & 5.

**NOTE:** The NVIDIA Tesla, GRID and Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2.

**NOTE:** There are limitations on fan types, setting, and chassis support by card.

**NOTE:** Mixing of GPUs is not supported.

**NOTE:** All NVIDIA, Intel and AMD cards limit configurations to having less than 1TB memory installed.

**NOTE:** Double Wide GPUs will occupy slots 2 and 5 and will leave only 2 slots left open.

**NOTE:** There are limitations on GPU support with the NVMe bay installed.

### Extended

HPE NVIDIA Tesla P100 PCIe 12GB Computational Accelerator (Extended)

Q2S42A

**NOTE:** There are server model limitations with this card: 4LFF supported to 25C, 8SFF supported to 30C, 12LFF not supported, 16SFF+Universal Media bay supported to 30C, 16SFF+NVMe cage supported to 30C and 24SFF+2SFF supported to 20C.

**NOTE:** For doublewide GPU support you are required to have at least 1x1400W Power Supply (720620-B21), per card.

**NOTE:** The Primary GPU riser (719076-B21) is required to support this in slot1.

**NOTE:** The secondary GPU riser (719073-B21) is required to support this in slot2 (2nd processor required).

**NOTE:** There are limitations on the server model and processor supported when adding Graphics accelerators.

**NOTE:** This card will require the addition of the High Performance Fan Kit (719079-B21).

**NOTE:** This card is supported on the E5-2600v4 series processors only.

## HPE Cooling Options

### Recommended

HPE DL380 Gen9 High Performance Temperature Fan Kit (Recommended)

719079-B21

**NOTE:** High Performance Fan kit consists of 6 fans, these will need to replace all the standard Fans in the unit, and fill all 6-Fan cages.

**NOTE:** The 12LFF and 24SFF models (including field upgrades to 24SFF) will already include 6 High Performance Fan kits.

**NOTE:** The High Performance Fan Kit is needed to support certain Passive GPGPU (Graphics cards) configurations; or ASHRAE operating environments.

**NOTE:** For elevated ambient temperature support please see: <http://www.hpe.com/servers/ashrae>.

## Additional Options

### Recommended Options

Offering the best combination of performance, value and availability, Recommended Options have been selected by HPE experts to provide the right technology for a range of workloads and market segments. Fully integrated into the HPE management and security experience, Recommended Options provide the best fit with timely availability.

### Extended Options

Extended Options provide an extended catalog of products tailored for customers in specific markets or with specific workloads, requiring the utmost in performance or value. Fully integrated into the HPE management and security experience, Extended Options represent great value and performance but typically have a longer lead-time.

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

#### HPE Insight Software

#### HPE Insight Control

HPE Insight Control including 1yr 24x7 Technical Support and Updates 1-server LTU	C6N27A
HPE Insight Control including 1yr 24x7 TSU E-LTU	C6N28ABE
HPE Insight Control Upgrade from iLO Advanced including 1yr 24x7 Support E-LTU	C6N38ABE

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HPE Software Technical Support and Update Service.

**NOTE:** Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded

at: <https://www.hpe.com/info/insightmanagement>

**NOTE:** For additional license options please see the [HPE Insight Control QuickSpecs](#)

**NOTE:** For additional license options please see the [QuickSpecs](#)

at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04123391>

#### Embedded Management

#### HPE iLO Advanced

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE

#### HPE Converged Infrastructure Management Software

#### HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE

#### HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView Physical Media Kit LTU	E5Y37A

**NOTE:** Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.

## Additional Options

**NOTE:** Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning. Media kit #BD883A can be ordered for a physical copy of this software (USB flash drive).

**NOTE:** Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <http://www.hpe.com/info/hpeoneview>.

### High Performance Clusters

#### HPE Cluster Management Utility

HPE Insight Cluster Management Utility 1yr 24x7 Flexible LTU QL803B

HPE Insight Cluster Management Utility 3yr 24x7 Flexible LTU BD476A

**NOTE:** These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.

HPE Insight Cluster Management Utility Media BD477A

**NOTE:** For additional license kits please see the [HPE Insight Cluster Management Utility QuickSpecs](#).

### HPE PCIe Workload Accelerator Options

#### NVME PCIe Workload Accelerators - Extended

HPE 6.4TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card (Extended) 877829-B21

HPE 4TB PCIe x4 Lanes Read Intensive HHHL 3yr Wty Digitally Signed Firmware Card (Extended) 877831-B21

HPE 3.2TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card (Extended) 877827-B21

HPE 1.6TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card (Extended) 877825-B21

HPE 750GB PCIe x4 Lanes Write Intensive HHHL 3yr Wty Digitally Signed Firmware Card (Extended) 878038-B21

### HPE Security

#### Recommended

HPE 2U Security Bezel Kit (Recommended) 666988-B21

HPE Trusted Platform Module 2.0 Kit (Recommended) 745823-B21

**NOTE:** If the TPM Module (488069-B21) is installed, then there is no support for TPM 2.0.

**NOTE:** This is supported on both the E5-2600v3 and E5-2600v4 processors.

**NOTE:** HPE Trusted Platform Module 2.0 Option works with Gen9 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.

**NOTE:** HPE Gen9 servers purchased earlier may need the latest firmware update to be compatible with the TPM 2.0 Option.

**NOTE:** HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Trusted Platform Module Option (Recommended) 488069-B21

**NOTE:** The HPE Trusted Platform Module Option (488069-B21) is the TPM 1.2 version. Compatible server platforms include Gen8 and Gen9 servers.

**NOTE:** HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

## Additional Options

### HPE Storage Controllers

#### SAS Controllers

##### HPE Flexible Smart Array Controllers - Recommended

HPE Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller (Recommended) 726736-B21

**NOTE:** Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.

**NOTE:** Includes the HPE Smart Storage Battery.

HPE Smart Array P840ar/2GB FBWC 12Gb 2-port Internal SAS Controller (Recommended) 843199-B21

**NOTE:** Provides support for up to 16 internal SAS/SATA drives without using a PCIe slot.

**NOTE:** Includes the HPE Smart Storage Battery.

##### HPE Smart Array Controllers - Recommended

HPE Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller (Recommended) 726821-B21

**NOTE:** Provides support for up to 8 internal SAS/SATA drives.

HPE Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller (Recommended) 726897-B21

##### HPE Smart Array Controllers - Extended

HPE Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller (Extended) 726903-B21

HPE Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller (Extended) 726825-B21

##### HPE Smart Host Bus Adapters - Recommended

HPE H241 12Gb 2-ports Ext Smart Host Bus Adapter (Recommended) 726911-B21

HPE H240ar 12Gb 2-ports Int Smart Host Bus Adapter (Recommended) 726757-B21

**NOTE:** Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.

##### HPE Smart Host Bus Adapters - Extended

HPE H240 12Gb 2-ports Int Smart Host Bus Adapter (Extended) 726907-B21

##### HPE Cable Options - Recommended

HPE DL380 Gen9 12LFF Rear 2SFF or 3LFF P840/440 SAS Cable Kit (Recommended) 783007-B21

**NOTE:** 12LFF port 3 to 2SFF or 3LFF to P440/840 PCIe.

HPE DL380 Gen9 2SFF Front SAS x4 Cable Kit (Recommended) 783008-B21

**NOTE:** For front mount 2SFF to H240/P440ar, H240 or embedded B140i SATA.

HPE DL380 Gen9 8SFF SAS Cable Kit (Recommended) 783009-B21

**NOTE:** 8/16/24 SFF to P840/440 bay 3.

HPE DL380 Gen9 2SFF x8 Front Cable Kit (Recommended) 785989-B21

**NOTE:** For front/rear mount 2SFF to P440/840 PCIe).

HPE DL380 Gen9 12LFF SAS Cable Kit (Recommended) 785991-B21

**NOTE:** For 12LFF to P440/840 PCIe cables- ports 1/2/3.

HPE DL380 SFF Smart Array HBA H200/P400 Series SAS Cable Kit (Recommended) 786092-B21

**NOTE:** 8/16/24SFF to 240/440ar, H240 PCIe or embedded B140i SATA.

HPE DL380 Gen9 12LFF Smart HBA H240 SAS Cable Kit (Recommended) 786215-B21

**NOTE:** For 12LFF ports 1&2 to H240/P440ar, H240 or embedded B140i SATA.

**NOTE:** For details on cabling options, additional information available here:

**Cabling Matrix**

## Additional Options

### Optional Software

HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU	Q2F26AAE
HPE Smart Array SR SmartCache (Single Key/Single Server) LTU	D7S26A
HPE Smart Array SR SmartCache (Single Key/Multiple Servers) LTU	D7S27A
HPE Smart Array SR SmartCache (Single Key/Multiple Servers) E-LTU	D7S27AAE

**NOTE:** HPE SmartCache is supported when one of the supported Smart Array Controllers is installed in the server.

**NOTE:** HPE SmartCache comes standard (no licensing is required) if the HPE Smart Array P840 Controller is installed in the server.

### HPE Tape Backup

**NOTE:** For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hpe.com/storage/storeever>. For hardware and software compatibility of Hewlett Packard Enterprise tape backup products <http://www.hpe.com/storage/BURACompatibility>.

#### Tape Drives

HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive	BB874A
HPE StoreEver 1/8 G2 LTO-6 Ultrium 6250 Fibre Channel Tape Autoloader	COH19A
HPE StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HPE StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive	EH958B

#### HPE Tape Storage Systems

##### HPE StoreEver MSL6480

HPE StoreEver MSL6480 Scaleable Expansion Module	QU626A
--	--------

**NOTE:** Please see the [HPE StoreEver MSL6480 Tape Library QuickSpecs](#) for Technical Specifications and additional information.

HPE StoreEver MSL6480 Scalable Base Module	QU625A
HPE StoreEver MSL2024 0-drive Tape Library	AK379A
HPE StoreEver MSL4048 0-drive Tape Library	AK381A

### HPE Disk Backup

#### HPE RDX Removable Disk Backup System

HPE RDX 4TB USB 3.0 External Disk Backup System	Q2R33A
HPE RDX+ 3TB USB 3.0 External Disk Backup System	P9L72A
HPE RDX 3TB USB 3.0 Internal Disk Backup System	P9L71A
HPE RDX 2TB USB3.0 External Disk Backup System	E7X53B
HPE RDX+ 1TB External Backup System	B7B69B
HPE RDX+ 500GB External Backup System	B7B66B
HPE RDX+ External Docking System	C8S07B
HPE D3700 Enclosure	QW967A
HPE D3600 Enclosure	QW968A

**NOTE:** For the complete range of RDX drives and media see: <https://www.hpe.com/us/en/product-catalog/storage/disk-based-backup-systems.html>. For hardware and software compatibility of Hewlett Packard Enterprise disk backup products see: <http://www.hpe.com/storage/spock>.

### HPE Storage Options

**NOTE:** For the complete listing of Fibre Channel Host Bus Adapters for Windows 2000, Windows Server 2003 and Linux, please see:

<https://www.hpe.com/us/en/product-catalog/storage/storage-adapters.html>.

**Emulex Fibre Channel HBAs - Recommended**

## Additional Options

HPE 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter (Recommended)	AJ762B
HPE 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter (Recommended)	AJ763B
HPE StoreFabric 84E 4-port 8Gb Fibre Channel Host Bus Adapter (Recommended)	E7Y63A
HPE StoreFabric SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter (Recommended)	Q0L13A
HPE StoreFabric SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter (Recommended)	Q0L14A
HPE StoreFabric SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter (Recommended)	Q0L11A
HPE StoreFabric SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter (Recommended)	Q0L12A
HPE StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter (Recommended)	C8R38A
HPE StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter (Recommended)	C8R39A
HPE StoreFabric SN1100E 4-port 16Gb Fibre Channel Host Bus Adapter (Recommended)	P9D99A
<b>QLogic Fibre Channel HBAs - Recommended</b>	
HPE 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter (Recommended)	AK344A
HPE 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter (Recommended)	AJ764A
HPE StoreFabric 84Q 4-port 8Gb Fibre Channel Host Bus Adapter (Recommended)	P9D91A
HPE StoreFabric SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter (Recommended)	P9D93A
HPE StoreFabric SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter (Recommended)	P9D94A
HPE StoreFabric SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter (Recommended)	P9M75A
HPE StoreFabric SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter (Recommended)	P9M76A
<b>QLogic Fibre Channel HBAs - Extended</b>	
HPE StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter (Extended)	QW971A
HPE StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter (Extended)	QW972A
<b>Converged Network Adapter - Recommended</b>	
HPE StoreFabric CN1100R Dual Port Converged Network Adapter (Recommended)	QW990A
HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter (Recommended)	N3U52A
HPE StoreFabric CN1200E 10Gb Converged Network Adapter (Recommended)	E7Y06A
HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter (Recommended)	N3U51A

### HPE Power Distribution Units (PDUs)

#### HPE Basic Power Distribution Units (PDU) - Extended

HPE 800VA - 277V Input / 230V Output NA Rack Mount Transformer (Extended)	H3X09A
---	--------

**NOTE:** Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on additional options and product specifications.

#### HPE Intelligent Power Distribution Unit (PDU) - Recommended

HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU (Recommended)	AF520A
---	--------

## Additional Options

HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire 48A/208V (12) C19/Horizontal NA/JP PDU (Recommended)	AF535A
HPE 5xC13 Intelligent PDU Extension Bar G2 Kit (Recommended)	AF547A
HPE 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar (Recommended)	AF528A
<b>HPE Intelligent Power Distribution Unit (PDU) - Extended</b>	
HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU (Extended)	AF521A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU (Extended)	AF522A
HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V (6) C19/Horizontal NA/JP PDU (Extended)	AF523A
HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU (Extended)	AF533A

**NOTE:** Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on additional options and product specifications.

### HPE Rack Mount Consoles, KVM Switches, and Keyboards

#### HPE Location Discovery Services

HPE DL380 Gen9 Location Discovery Services Ear Kit	768884-B21
--	------------

**NOTE:** Please see the [HPE Location Discovery Services QuickSpecs](#) for information on additional options and product specifications.

#### HPE Rack Mount Consoles - Recommended

HPE LCD8500 1U US Rackmount Console Kit (Recommended)	AF630A
---	--------

#### HPE Rack Mount Consoles - Extended

HPE LCD8500 1U US TAA Rackmount Console Kit (Extended)	AF645A
--	--------

#### HPE KVM Switches - Recommended

HPE 0x1x8 G3 KVM Console Switch (Recommended)	AF651A
HPE 0x2x16 G3 KVM Console Switch (Recommended)	AF652A
HPE KVM Console USB Interface Adapter (Recommended)	AF628A
HPE KVM Console USB 2.0 Virtual Media CAC Interface Adapter (Recommended)	AF629A

#### HPE KVM Switches - Extended

HPE USB Remote Access Key for G3 KVM Console Switches (Extended)	AF650A
HPE 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software (Extended)	AF618A
HPE 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software (Extended)	AF619A
HPE 1x4 USB/PS2 KVM Console Switch (Extended)	AF611A
HPE 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software (Extended)	AF620A
HPE 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software (Extended)	AF621A
HPE 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software (Extended)	AF622A

**NOTE:** To learn more, please visit the [HPE KVM Switches web page](#).

#### HPE USB Keyboard and Mouse - Recommended

HPE USB US Keyboard/Mouse Kit (Recommended)	631341-B21
---	------------

#### Rail Kits - Recommended

**NOTE:** Gen9 rail kits have changed significantly from prior generation rail kits. Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.

**NOTE:** Rail kits are optional for DL380 Gen9 and are no longer included standard with the server.

## Additional Options

Customers have the option to purchase their server without a rail kit.

**NOTE:** Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

**NOTE:** To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (695539-001).

**CAUTION:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

HPE 2U Small Form Factor Easy Install Rail Kit (Recommended) 733660-B21

**NOTE:** Does not include CMA (733664-B21).

HPE 2U Large Form Factor Easy Install Rail Kit (Recommended) 733662-B21

**NOTE:** Does not include CMA (733664-B21).

HPE 2U Cable Management Arm for Easy Install Rail Kit (Recommended) 733664-B21

HPE 2U Small Form Factor Ball Bearing Rail Kit (Recommended) 720863-B21

**NOTE:** Does not include CMA (720865-B21).

HPE 2U Large Form Factor Ball Bearing Rail Kit (Recommended) 720864-B21

**NOTE:** Does not include CMA (720865-B21).

HPE 2U Cable Management Arm for Ball Bearing Rail Kit (Recommended) 720865-B21

### HPE Other Options - Extended

HPE Rack LED Light Kit (Extended) BW939A

HPE Kit LCD 1.83m Latch Display Port Cable (Extended) G7T29A

### HPE Uninterruptible Power Systems (UPS)

#### HPE Rack-mountable UPS

##### R7000 Uninterruptible Power System (UPS) - Extended

HPE R7000 4U 50A High Voltage NA/JP Uninterruptible Power System (Extended) AF462A

##### R5000 Uninterruptible Power System (UPS) - Recommended

HPE R5000 3U L630 High Voltage NA/JP Uninterruptible Power System (Recommended) AF460A

**NOTE:** Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on additional options and product specifications.

#### HPE UPS Options - Recommended

HPE R/T3000 G4 Extended Runtime Module (Recommended) J2R10A

#### HPE UPS Options - Recommended

HPE R/T2200 G4 Extended Runtime Module (Extended) J2R09A

HPE 2U Rack/Tower UPS Shipping Kit (Extended) L4Q11A

**NOTE:** To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

### HPE USB and SD Options

#### HPE Enterprise Mainstream Flash Media Kits for Memory Cards - Recommended

HPE 32GB microSD Flash Memory Card (Recommended) 700139-B21

HPE 8GB microSD Flash Memory Card (Recommended) 726116-B21

HPE 8GB microSD Flash USB Drive (Recommended) 737953-B21

HPE 8GB Dual microSD Flash USB Drive (Recommended) 741279-B21

## Additional Options

### HPE Support Services Installation & Start-up Services

HPE Install ProLiant DL38x(p) Service	U4554E
HPE Installation and Startup DL38x(p) Service	U4555E



### Proactive Care

HPE 3 year Proactive Care 24x7 DL380 Gen9 w/IC Service	U5HW1E
HPE 3 year Proactive Care 24x7 with DMR DL380 Gen9 w/IC Service	U5HW2E
HPE 3 year Proactive Care 24x7 with CDMR DL380 Gen9 w/IC Service	U5HW3E
HPE 3 year Proactive Care Call to Repair DL380 Gen9 w/IC Service	U5HX0E
HPE 3 year Proactive Care Call to Repair 24x7 with DMR DL380 Gen9 w/IC Service	U5HX1E
HPE 3 year Proactive Care Call to Repair with CDMR DL380 Gen9 w/IC Service	U5HX2E
HPE 3 year Proactive Care 24x7 DL380 Gen9 Service	U7AE8E
HPE 3 year Proactive Care 24x7 with DMR DL380 Gen9 Service	U7AE9E
HPE 3 year Proactive Care 24x7 with CDMR DL380 Gen9 Service	U7AF0E
HPE 3 year Proactive Care Call to Repair DL380 Gen9 Service	U7AF4E
HPE 3 year Proactive Care Call to Repair 24x7 with DMR DL380 Gen9 Service	U7AF5E
HPE 3 year Proactive Care Call to Repair with CDMR DL380 Gen9 Service	U7AF6E

**NOTE:** For a full listing of support services available for this server, please visit <https://ssc.hpe.com/>

## Memory

### Memory Population guidelines

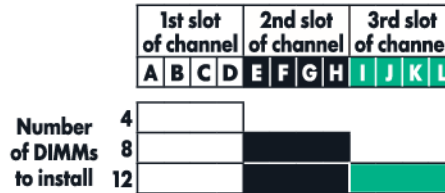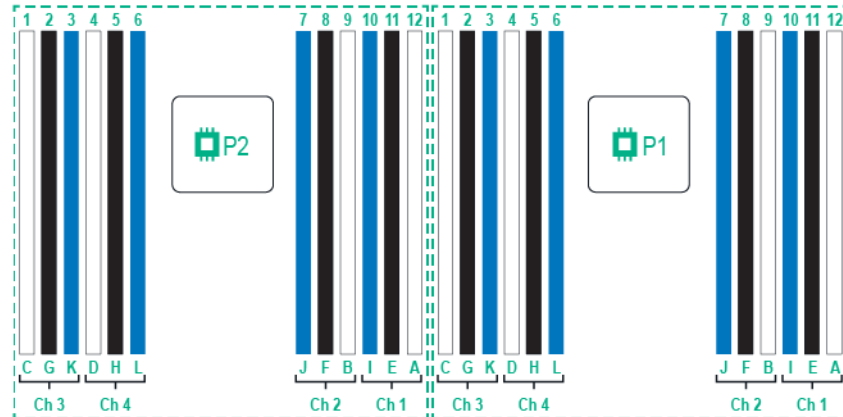

#### General Memory Population Rules and Guidelines:

- White DIMM slots denote the first slot of a channel. For 1 DPC (DIMM per channel) populate white slots only.
- A minimum of one DIMM is required per server.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and to load the channels similarly whenever possible.
- When two processors are installed, balance the DIMMs across the two processors.
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel. Heaviest load (DIMM with most ranks) within a channel goes furthest from the processor.
- Do not mix RDIMMs or LRDIMMs.
- LRDIMMs are supported up to 3 DIMMs per channel.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- HPE memory from previous generation servers is not compatible with the DL380 Gen9 Server. Certain HPE SmartMemory features such as memory authentication and enhanced performance may not be supported.
- To realize the performance memory capabilities listed in this document, HPE SmartMemory is required. For additional information, please see the HPE SmartMemory QuickSpecs at: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04111535>.
- For memory population rules and additional memory guidelines, please see the DL380 Gen9 user guide at <http://www.hpe.com/support>.

## Memory

- There are four (4) Memory channels per processor; eight (8) channels per 2 processor server.
- There are three (3) DIMM slots for each memory channel; twenty four (24) total slots for 2 processor server.
- Memory channels 1 and 3 consists of the three (3) DIMMs that are furthest from the processor.
- Memory channel 2 and 4 consists of the three (3) DIMMs that are closest to the processor.

### Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity				
[DIMM Type]	Registered DIMMs (RDIMMs)			Load Reduced (LRDIMMs)
HPE SKU P/N	726718-B21	726719-B21	728629-B21	726724-B21
DIMM Rank	Single Rank	Dual Rank	Dual Rank	Quad Rank
DIMM Capacity	8GB	16GB	32GB	64GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
DRAM Depth [bit]	1G	1G	1G	2G
DRAM Width [bit]	x4	x4	x4	x4
DRAM Density	4Gb	4Gb	4Gb	8Gb
CAS Latency	15-15-15	15-15-15	15-15-15	15-15-15
DIMM Native Speed (MT/s)	2133	2133	2133	2133
SLOTS THAT CAN BE POPULATED				
24 slot servers	24	24	24	24
MAXIMUM CAPACITY (GB)				
	192	384	768	1536
POPULATED DIMM SPEED (MT/s)				
1 DIMM Per Channel	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133
3 DIMM Per Channel	1600	1600	1600	1866

## Memory

## Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v4 Series Processor Family

Memory Bandwidth and Capacity							
[DIMM Type]	Registered DIMMs (RDIMMs)				Load Reduced (LRDIMMs)		
HPE SKU P/N	805347-B21	805349-B21	836220-B21	805351-B21	805353-B21	805358-B21	809208-B21
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank	Quad Rank	Octal Rank
DIMM Capacity	8GB	16GB	16GB	32GB	32GB	64GB	128GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
DRAM Depth [bit]	1G	2G	1G	2G	2G	2G	2G
DRAM Width [bit]	x8	x4	x4	x4	x4	x4	x4
DRAM Density	8Gb	8Gb	4Gb	8Gb	8Gb	8Gb	8Gb
CAS Latency	17-17-17	17-17-17	17-17-17	17-17-17	17-17-17	17-17-17	20-18-18
DIMM Native Speed (MT/s)	2400	2400	2400	2400	2400	2400	2400
SLOTS THAT CAN BE POPULATED							
24 slot servers	24	24	24	24	24	24	24
MAXIMUM CAPACITY (GB)							
	192	384	384	768	768	1536	3072
POPULATED DIMM SPEED (MT/s)							
1 DIMM Per Channel	2400	2400	2400	2400	2400	2400	2400
2 DIMM Per Channel	2133	2133	2400	2400	2400	2400	2400
3 DIMM Per Channel	1866	1866	1866	1866	2400	2400	2400

**NOTE:** Mixing the 128GB LRDIMM with other capacities is not supported.

Memory Speed by Processor Model	Processor Models	Supported Memory Speeds
	E5-2609v3, E5-2603v3	1600MT/s
	E5-2630Lv3, E5-2640v3, E5-2630v3, E5-2623v3, E5-2620v3	1866MT/s
	E5-2637v3, E5-2687Wv3, E5-2699v3, E5-2698v3, E5-2697v3, E5-2695v3, E5-2690v3, E5-2683v3, E5-2680v3, E5-2670v3, E5-2660v3, E5-2650Lv3, E5-2650v3, E5-2667v3, E5-2643v3	2133MT/s
	E5-2609v4, E5-2603v4	1866MT/s
	E5-2630Lv4, E5-2623v4, E5-2620v4, E5-2640v4, E5-2630v4	2133MT/s
	E5-2650Lv4, E5-2643v4, E5-2637v4, E5-2687Wv4, E5-2699v4, E5-2698v4, E5-2697v4, E5-2697Av4, E5-2695v4, E5-2690v4, E5-2683v4, E5-2680v4, E5-2660v4, E5-2650v4, E5-2667v4, E5-2699Av4	2400MT/s

Memory


Standard and Maximum Memory Capacity (Pre-configured Models)

Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
E5-2690v3, E5-2650v3	32GB (2x16GB)	736GB (22x32GB, 2x16GB)	1536GB (24x64GB)
E5-2660v4	64GB (4x16GB)	704GB (20x32GB, 4x16GB)	3072GB (24x128GB)
E5-2650v4	32GB (2x16GB)	736GB (22x32GB, 2x16GB)	3072GB (24x128GB)
E5-2630v4, E5-2620v4	16GB (1x16GB)	752GB (23x32GB, 1x16GB)	3072GB (24x128GB)
E5-2620v3	16GB (1x16GB)	752GB (23x32GB, 1x16GB)	1536GB (24x64GB)
E5-2609v4	8GB (1x8GB)	744GB (23x32GB, 1x8GB)	3072GB (24x128GB)
E5-2609v3	8GB (1x8GB)	744GB (23x32GB, 1x8GB)	1536GB (24x64GB)

DDR4 memory options part number decoder


**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.

- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB
- 128GB = 13,072MB

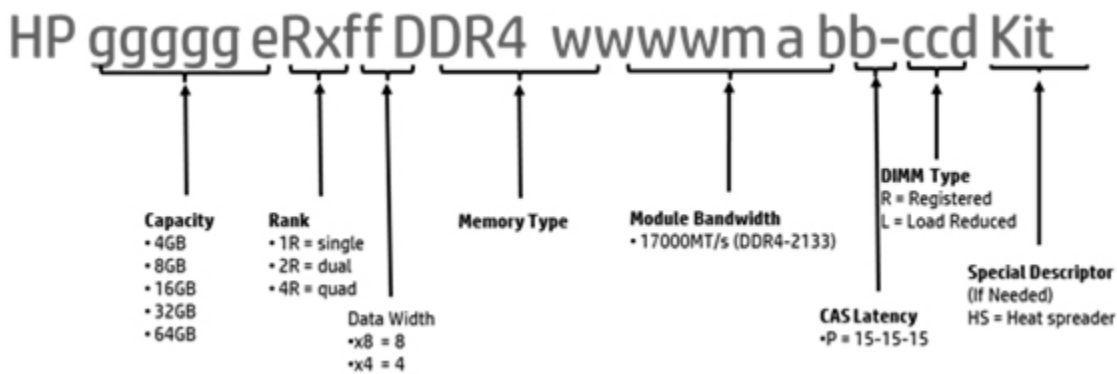


Storage

4 LFF hot-plug drive model

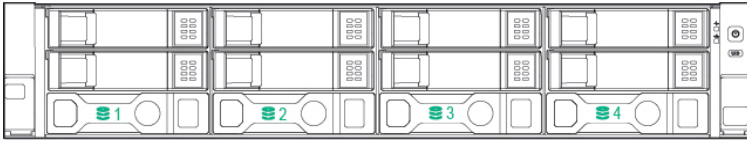


1-4 4 x LFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

12 LFF + 3 rear LFF hot-plug drive model

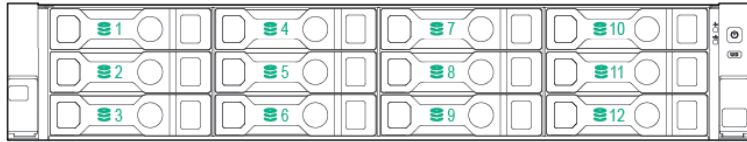


1-12 12 x LFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

25-27 3 x LFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays

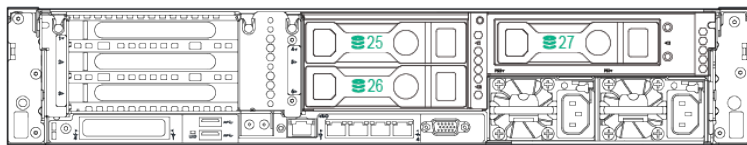


12 LFF + 2 rear SFF hot-plug drive model

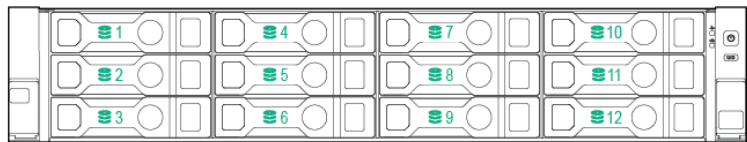


1-12 12 x LFF SATA/SAS/SDD Hot Pluggable Hard Drive Bays

25-26 2 x SFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays

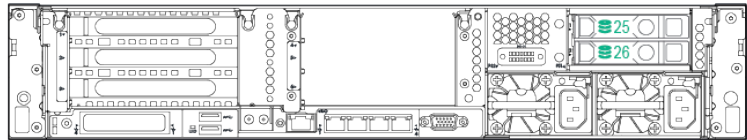


8 SFF (+2 SFF) hot-plug drive model with Universal Media Bay

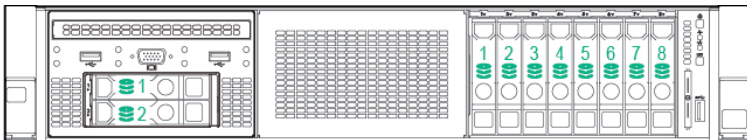

1-8 8 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays

1-2 2 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

16 SFF (+2 SFF) hot-plug drive model with Universal Media Bay

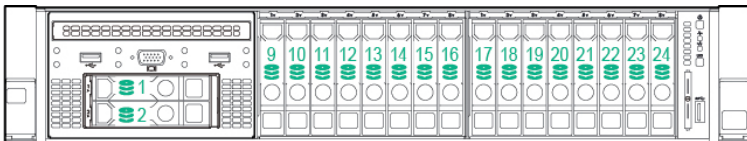


9-24 16 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays

1-2 2 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays

## Storage

24 SFF + rear 2 SFF hot-plug drive model

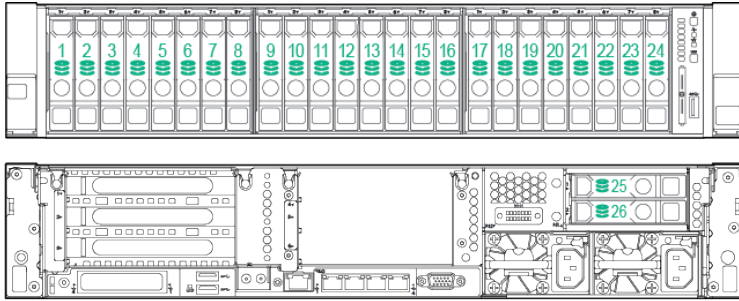

1-24 24 x SFF SATA/SAS/SDD Hot Pluggable Hard drive bays

25-26 2 x SFF SATA/SAS/SSD Hot Pluggable Rear Hard Drive Bays

**NOTE:** Drives behind the SAS expander will be labeled continuous, drives behind a controller will be numbered 1-8.

**NOTE:** With a SAS Expander and rear drive support the 2SFF rear will be labeled 25 & 26, for 3LFF they will be numbered 25-27.

## Technical Specifications

<b>System Unit</b>	<b>Dimensions</b>	SFF Drives: 3.44 x 17.54 x 26.75 in (8.73 x 44.55 x 67.94 cm) LFF Drives: 3.44 x 17.54 x 28.75 in (8.73 x 44.55 x 73.02 cm)
	<b>Weight (approximate)</b>	Minimum: 32.6 lb (14.759 kg) (Minimum - 8SFF chassis with 1xSFF HDD and 7 HDD blanks, 1x processor, 1x power supply (plus blank), 1x Flexible Smart Array, 1x Riser installed) Maximum: 51.5 lb (23.6 kg) (Maximum - 12 LFF hard drives (No rear drives), 2x processors, 2x power supplies, 1x Flexible Smart Array, 2x Risers installed)
	<b>Input Requirements</b> (per power supply)	Rated Line Voltage 100 to 120 VAC 200 to 240 VAC
	<b>BTU Rating</b>	Maximum For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only
	<b>Power Supply Output</b> (per power supply)	Rated Steady-State Power For 1400W Power Supply: 1400W (at 240 VAC), 1400W (at 240 VAC) For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only Maximum Peak Power For 1400W Power Supply: 1400W (at 200 to 240 1VAC), 1400W (at 240 VAC) input for China only For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only
	<b>System Inlet Temperature</b>	Standard Operating Support 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

## Technical Specifications

	Extended Ambient Operating Support	<p>For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:</p> <p><b><a href="http://www.hpe.com/servers/ashrae">http://www.hpe.com/servers/ashrae</a></b></p> <p>For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <b><a href="http://www.hpe.com/servers/ashrae">http://www.hpe.com/servers/ashrae</a></b></p> <p>System performance may be reduced if operating in the extended ambient operating range or with a fan fault.</p>
<b>Relative Humidity</b>	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Operating	Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
(non-condensing)	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
<b>Altitude</b>	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
<b>Acoustic Noise</b>	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	<b>Idle</b>	
	LWAd	4.0 B Entry LFF 4.1 B Entry 4.2 B Base 5.7 B Base LFF 4.3 B Perf
	LpAm	23 dBA Entry LFF 24 dBA Entry 24 dBA Base

## Technical Specifications

39 dBA Base LFF

25 dBA Perf

### Operating

LWAd 4.3 B Entry LFF

4.6 B Entry

4.8 B Base

5.9 B Base LFF

5.6 B Perf

LpAm 25 dBA Entry LFF

29 dBA Entry

30 dBA Base

31 dBA Base LFF

39 dBA Perf

**NOTE:** The Listed sound levels apply to standard shipping configurations (Entry LFF, Entry, Base, Base LFF and Performance models) additional options may result in increased sound levels. The Base LFF model leverages our High Efficiency Fans, other models are shipping with standard fan options.

### Emissions Classification (EMC)

FCC Rating Class A

Normative Standards CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

**NOTE:** Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

**NOTE:** The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

<b>HPE Dynamic Smart Array B140i Controller</b>	<b>Number of PCI links</b>	Four
	<b>PCI link rate</b>	4Gb/s
	<b>Storage protocol support</b>	SATA
	<b>SAS/SATA peak data transfer rate</b>	6Gb/s
	<b>Number of SAS/SATA links</b>	10 links
	<b>SAS/SATA connectivity</b>	2x4 connectors; 2x1 connectors
	<b>Expander support</b>	No
	<b>Drives supported (max)</b>	Up to 10 Internal Drives
	<b>RAID support</b>	0, 1, 10, 5 SATA
	<b>Software management</b>	HPE SSA, SMH, SIM
	<b>Warranty</b>	Server warranty
	<b>HPE Secure Encryption license</b>	Not Supported
	<b>HPE SmartCache License</b>	Not Supported
	<b>HPE Smart Storage Administrator</b>	Supported

## Technical Specifications

<b>HPE Ethernet 1Gb 4-port 331i Adapter</b>	<b>Network Interface</b>	10Base-T/100Base-TX/1000Base-TX	
	<b>Compatibility</b>	IEEE 802.3 10Base-T	
		IEEE 802.3ab 1000Base-T	
		IEEE 802.3u 100Base-TX	
	<b>Data Transfer Method</b>	PCI Express, two lanes (x2)	
	<b>Controller</b>	BCM5719	
	<b>Network Transfer Rate</b>	10Base-T (Half-Duplex)	10 Mb/s per port, 40 Mb/s combined
		10Base-T (Full-Duplex)	20 Mb/s per port, 80 Mb/s combined
		100Base-TX (Half-Duplex)	100 Mb/s per port, 400 Mb/s combined
		100Base-TX (Full-Duplex)	200 Mb/s per port, 800 Mb/s combined
1000Base-TX (Half and Full-Duplex)		1000 Mb/s per port, 4000 Mb/s combined	
1000Base-TX (Full-Duplex)		2000 Mb/s per port, 8000 Mb/s combined	
<b>Connector</b>	Four RJ-45		
<b>Cable Support</b>	10 Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)	
	10/100/1000 Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)	
<b>Environment-friendly Products and Approach</b>	<b>End-of-life Management and Recycling</b>	Hewlett Packard Enterprise offers end-of-life product return, trade-in, and recycling programs, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.	

**<http://www.hpe.com/recycle>**

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

**<http://www.hpe.com/recycle>**

## Summary of Changes

Date	Version History	Action	Description of Change
6-Aug-2018	Version 40	Added	Added new Solid State Drives offering to the HPE Drives section.
		Changed	Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
4-Jun-2018	Version 39	Added	Added new Solid State Drives offering to the HPE Drives section.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
7-May-2018	Version 38	Changed	Form factor for Base Models was revised.
2-Apr-2018	Version 37	Changed	SKU description from Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
5-Mar-2018	Version 36	Removed	Obsolete SKUs were removed from the QuickSpecs.
4-Dec-2017	Version 35	Added	Added new higher capacity LFF and SSD drives.
		Changed	Maximum Internal Storage and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
25-Sep-2017	Version 34	Added	Added new Solid State Drives offering to the HPE Drives section. Added new PCIe Accelerators options. Added new InfiniBand option.
		Changed	Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
7-Aug-2017	Version 33	Added	Added new Solid State Drives offering to the HPE Drives section.
11-Jul-2017	Version 32	Added	Added new NVIDIA Tesla GPUs.
		Changed	HPE Power Supplies section was revised.
5-Jun-2017	Version 31	Added	Added new Solid State Drives offering to the HPE Drives section. Added new GPU option.
8-May-2017	Version 30	Added	Support for ClearOS was added under Operating Systems and Virtualization Software Support for ProLiant Servers and Optional Features sections. Added new HPE Computation and Graphics Accelerators options.
		Changed	HPE Unique Options section was revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
3-Apr-2017	Version 29	Changed	Smart Buy models section was revised for the NA version only.
27-Mar-2017	Version 28	Added	Added new Hard Drives and new HPE Networking option.
		Changed	Base Configuration, HPE Unique Options, HPE Computation and Graphics Accelerators, and HPE Storage Options were revised.
17-Feb-2017	Version 27	Changed	HPE Memory section under Core Options was revised.
13-Feb-2017	Version 26	Added	Added new HDD and SSD offering to HPE Drives section.
		Changed	Processors and Memory under Standard Features were revised. Storage Software, HPE Unique Options, HPE Processors, and HPE Memory were revised.
16-Dec-2016	Version 25	Added	Availability note was added to the HPE Drives section.
		Changed	Overview, Storage Software, and HPE Computation and Graphics Accelerators were revised.
28-Nov-2016	Version 24	Added	Added new NVIDIA Tesla M10 and P100 cards new Virtualization and High-End General Compute GPU offering. Added new LFF HDDs up to 10TB capacity now bring the DL380 max storage capacity to 150TB SAS. Added new Fiber Channel HBA's up to 32Gb. Added new E5-2699Av4 processor.

## Summary of Changes

		Changed	Processors, Memory, Maximum Internal Storage, HPE Drives, HPE Computation and Graphics Accelerators, and HPE Storage Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Oct-2016	Version 23	Removed	Obsolete Hard Drives were removed from the QuickSpecs.
26-Sep-2016	Version 22	Added	Added new NVIDIA Tesla M4/M40 GPUs and new 10TB LFF hard drives offering.
		Changed	Memory, Maximum Internal Storage, HPE Computation and Graphics Accelerators, and HPE Storage Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
19-Aug-2016	Version 21	Changed	Smart Buy models section was revised for the NA version only.
15-Aug-2016	Version 20	Added	Added new options to HPE Networking, HPE Infiniband, HPE Computation and Graphics Accelerators, HPE Disk Backup, and HPE Storage Options.
		Changed	HPE Unique Options was revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
8-Jul-2016	Version 19	Changed	Smart Buy models section was revised for the NA version only.
6-Jun-2016	Version 18	Added	Added new 25GbE networking options, OneView 3.0, and new NVIDIA Quadro GPU options.
		Changed	Pre-configured Models, HPE Memory, HPE Drives, HPE Computation and Graphics Accelerators, HPE Disk Backup, and HPE Storage Options were updated.
29-Apr-2016	Version 17	Changed	E5-2600v4 Series Smart Buy Models table was updated in the NA version only.
1-Apr-2016	Version 16	Changed	What's New section was updated. Standard Features/Memory and HPE Memory sections were revised.
31-Mar-2016	Version 15	Added	Added new Smart Memory DDR4 2400MHz, Intel Xeon E5-2600v4 processor support, new Flexible Smart Array P840ar controller, new graphic options, new HPE Trusted Platform Module (TPM) 2.0, new HDD offering.
		Changed	Embedded Management, Service and Support, Pre-Configured Models, HPE Security, and Memory sections were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
16-Feb-2016	Version 14	Added	New HDD offering was added to HPE Drives.
		Changed	HPE Computation and Graphics Accelerators, HPE Data Center Racks, and HPE Power Distribution Units (PDUs) were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Dec-2015	Version 13	Changed	Smart Buy models section was revised in the NA version only.
1-Dec-2015	Version 12	Added	New HDD offering was added to HPE Drives. New options added to Graphics Options, HPE PCIe Workload Accelerator Options, and HPE Tape Backup.
		Changed	On System Management Chipset, Maximum Internal Storage, Embedded Management, and Server utilities were revised. Product images were updated.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Sep-2015	Version 11	Added	Added new 6Gb SATA Solid State Drives. Added new HPE OneView management software.
		Changed	Maximum Internal Storage was revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Aug-2015	Version 10	Added	Added new Solid State Drives offering. Added new graphic options.
		Changed	What's New changed to:

## Summary of Changes

			<p>New support for NVMe PCIe SSDs</p> <p>New Graphic card options</p> <p>Service and Support section was updated.</p> <p>Maximun Internal Storage and Core Options were revised.</p>
		Removed	Obsolete SKUs were removed from the QuickSpecs.
1-Jun-2015	Version 9	Added	<p>New larger capacity HDDs (up to 8TB LFF), Max capacity 120TB were added.</p> <p>New higher capacity memory (64GB), Max capacity 1.5TB was added.</p> <p>New Networking options were added.</p> <p>Optional Software added to HPE Storage Controllers.</p>
		Changed	<p>Updated max HDD and memory capacity due to new options added.</p> <p>HPE SmartCache Software, HPE Disk Backup System, HPE Uninterruptible Power Systems (UPS) were updated.</p>
30-Mar-2015	Version 8	Added	<p>New Hard Drives offering.</p> <p>Optical Software added to HPE Storage Controllers.</p> <p>Added new HPE Pointnext operational services.</p> <p>Added new HPE PCIe Workload Accelerator Options.</p>
		Changed	<p>What's New, Standard Features, Unique Options, Power Supplies, HPE Storage Controllers, HPE Disk Storage Systems, and Technical Specifications were revised.</p>
		Removed	Removed obsolete HPE Pointnext operational services.
17-Feb-2015	Version 7	Added	Added Smart Buy Models to the NA version only.
9-Feb-2015	Version 6	Added	<p>What's new section was added.</p> <p>Added new HDD offering, new computational Graphics options, and new G4 UPS models.</p>
		Changed	<p>HPE Drives, HPE Computation and Graphics Accelerators, HPE Tape Backup, HPE Disk Backup, HPE Rack Mount, Consoles, KVM Switches, and Keyboards, and HPE Uninterruptible Power Systems (UPS) sections were revised.</p>
1-Dec-2014	Version 5	Changed	Changes made throughout the entire QuickSpecs.
13-Oct-2014	Version 4	Changed	Corrected inconsistencies between Product Bulletin and Concentra versions.
13-Oct-2014	Version 3	Added	<p>6G SATA Enterprise Value G1 Solid State Drives were added to Core Option section.</p> <p>HPE PCIe Workload Accelerator Options, HPE USB and SD options, and HPE Pointnext operational services were added to the Additional Options section.</p>
		Changed	<p>Standard Features, Optional Features, Pre-Configured Models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, and Memory sections were revised.</p>
19-Sep-2014	Version 2	Changed	Changes were made throughout the QuickSpecs.
09-Sep-2014	Version 1	New	New QuickSpecs.

## Summary of Changes



[hpe.com/qref/dl380gen9](http://hpe.com/qref/dl380gen9)



**Sign up for updates**

---

© Copyright 2018 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04375627 - 15034 – North America - V40 - 6-August-2018

