


## 4-Port USB-A PCIe Card - 10Gbps - 4 Dedicated USB Controllers - PCIe 3.0 x4

Product ID

P10Q4A-USB-CARD

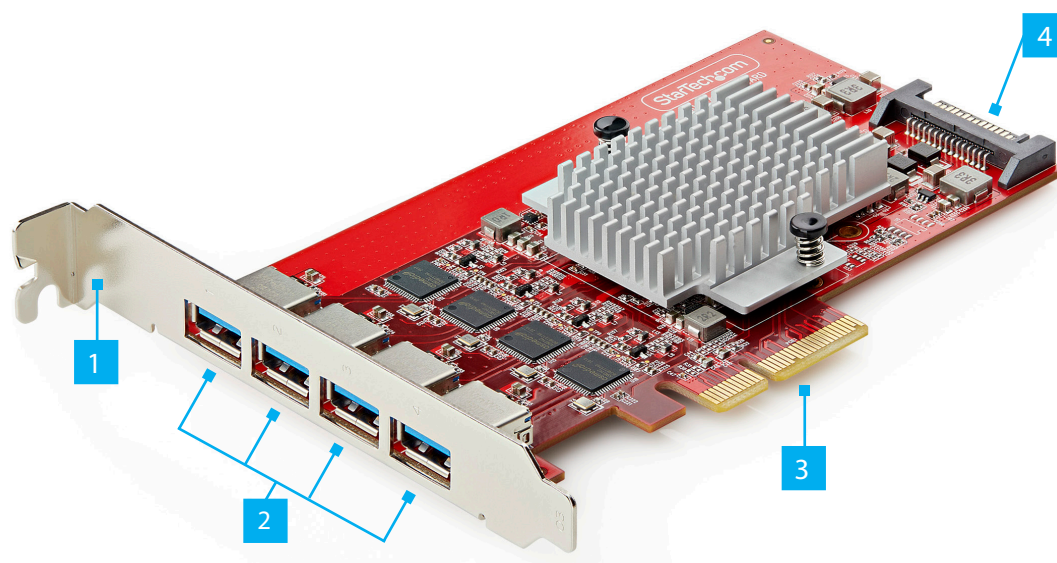

\*Product may vary from image

	Feature	Function
1	PCIe Slot Bracket	<ul style="list-style-type: none"> <li>Used to secure onto the <b>Host Computer Case</b></li> <li>Standard size bracket</li> </ul>
2	USB Type-A Ports (x4)	<ul style="list-style-type: none"> <li>Connects <b>USB-A</b> peripheral devices</li> <li>Supports up to <b>10Gbps</b> speed and <b>5V 2A</b> (10W) per port</li> </ul>
3	PCI Express x4 Connector	<ul style="list-style-type: none"> <li>Insert into a <b>PCI Express Slot</b> on the <b>Host Computer</b></li> <li>Compatible with PCIe 3.0 or newer. Requires an x4 or larger slot</li> </ul>
4	SATA Power Connector	<ul style="list-style-type: none"> <li>(Optional) Connect a <b>SATA Power Cable</b> from the <b>Host Computer's Power Supply</b></li> </ul> <p><b>Note:</b> Using the SATA Power Connector is recommended to ensure sufficient power is provided to the card and to each USB port</p>

### Package Contents

- PCIe USB Card x 1
- Product Documentation x 1

### Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:  
[www.StarTech.com/P10Q4A-USB-CARD](http://www.StarTech.com/P10Q4A-USB-CARD)

- An available PCIe Gen 3 or newer slot, electrically configured as x4, x8, or x16

### Installation

**WARNING!** Static electricity can cause severe damage to PCI Express cards. Ensure proper grounding before opening the computer case or touching the PCI Express card. Use an Anti-Static Strap when installing any computer component. If an Anti-Static Strap isn't available, discharge built-up static electricity by touching a large grounded metal surface for several seconds. Handle the PCI Express card by its edges, avoiding contact with the gold connectors.

1. Turn **Off** the **Computer** and any **Peripheral Devices** connected to it (i.e., **Printers, External Hard Drives**, etc.).
2. Turn **Off** the **Power Switch** on the **Power Supply**, if present Unplug the **Power Cable** from the back of the **Computer**.
3. Disconnect any **Peripheral Devices** that are connected to the **Computer**.
4. Remove the **Cover** from the **Computer Case**.


**Note:** Consult the documentation that came with the Computer for details about how to do this safely.

5. Locate an open **PCI Express Slot** and remove the corresponding **Slot Cover Plate** from the back of the **Computer Case**.  
**Note:** Consult the documentation that came with the Computer for details about how to do this safely.  
 Use an available x4 PCIe Gen 3 or newer slot, electrically configured as x4, x8, or x16
6. Gently insert the **PCI Express Card** into the open **PCI Express Slot** and fasten the **Bracket** to the back of the **Computer Case**.
7. (Optional) Connect a **SATA Power Cable** from the **Host Computer's Power Supply** to the **SATA Power Connector** located on the rear of the **PCIe USB Card**.  
**Note:** Using the SATA Power Connector is recommended to ensure sufficient power is provided to the card and each USB port.
8. Install the **Cover** back onto the **Computer Case**.
9. Reconnect the **Power Cable** to the back of the **Computer**.
10. Reconnect all of the **Peripheral Devices** that were disconnected in **Step 3**. Turn **On** the **Power Switch** on the **Power Supply**, if present.
11. Turn **On** the **Computer** and **Peripheral Devices**.

## Download the Driver

**Note:** The PCIe USB Card should auto-install using native drivers in most major operating systems.

1. Open an **Internet Browser** and navigate to: [www.StarTech.com/P10Q4A-USB-CARD](http://www.StarTech.com/P10Q4A-USB-CARD)
2. Click the **Drivers & Downloads** tab.
3. Under **Driver(s)**, download the **Driver** for the appropriate **Operating System**.
4. Extract the contents of the **Driver Package**.
5. Run the **Installer** and follow the on-screen instructions to complete the **Driver** installation.



### HQ Contact:

StarTech.com Ltd.  
45 Artisans Crescent,  
London, ON N5V 5E9,  
Canada

### US Contact:

StarTech.com USA LLP  
4490 South Hamilton Rd,  
Groveport, OH 43125,  
United States

### UK Contact:

StarTech.com Ltd.  
15 Gowerton Rd,  
Northampton, NN4 7BW,  
United Kingdom

### EU Contact:

StarTech.com Ltd.  
Siriusdreef 17-27  
2132 WT Hoofddorp  
The Netherlands

### JP Contact:

StarTech.com K.K.  
Atelier Yours Ogawamachi 7F  
1-10-2 Kanda Ogawamachi  
Chiyoda-ku, Tokyo 101-0052  
Japan

FR: startech.com/fr  
DE: startech.com/de  
ES: startech.com/es  
NL: startech.com/nl  
IT: startech.com/it  
JP: startech.com/jp