


## ScanSnap ixsoo





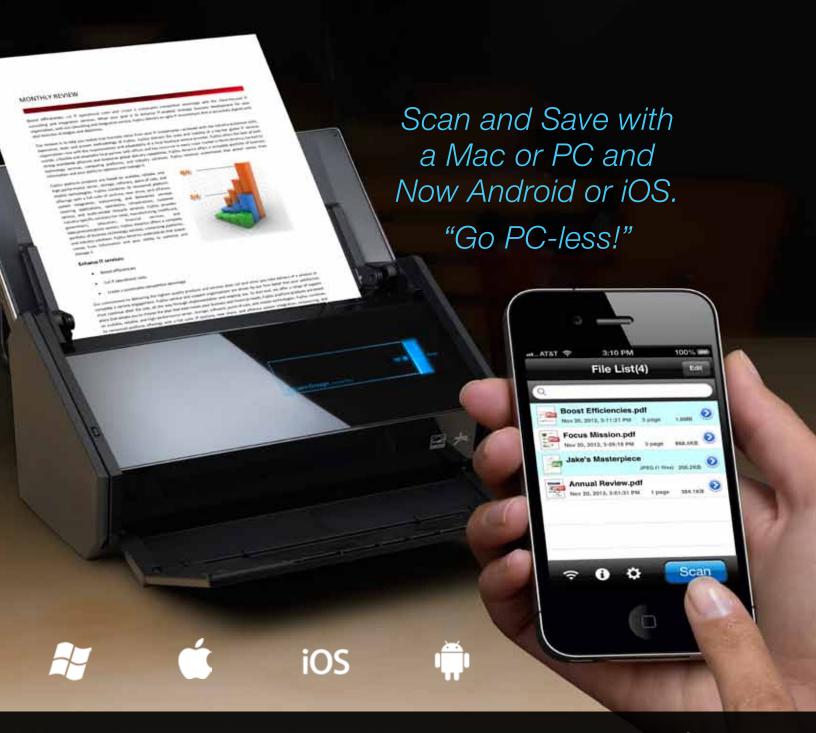

Simple, Fast & Powerful!

Accelerate yourself with ScanSnap iX500!

Runs on Windows® & Mac OS X computers

And now iOS and Android mobile device and tablets

**Easy One-button PDF creation** 

Just stack in the paperwork and press the scan button

Handles a stack of documents

Load up to 50 sheets in the automatic document feeder

Scans both sides of each page at the same time

Images are automatically straightened and cropped with blank sides removed

Fast and reliable document scanning

Scans up to 25 pages per minute with advanced paper handling

Scans business cards to oversized documents

With carrier sheet, scans A3 documents, photos, and much more



Quickly bypass the computer to scan an image enhanced PDF or JPEG file directly to paper feeding an iOS or Android mobile device or tablet.\* technology of our professional-grade **Built-in GI microprocessor** scanners, iX500 achieves exceptional

A dual-core CPU-mounted "GI" processor performs the intelligent image enhancement

Scan directly to mobile devices

responsible for great

looking images with dramatically faster results and more sophisticated connectivity:

- Image processing: Automatic corrections and image output
- Supports WI-FI: WPS (WI-FI Protected Setup) wireless LAN (IEEE802.11b/g/n)
- Supports USB 3.0

\* See list of supported devices at http://scansnap.fuiitsu.com



feeding reliability

using "Separation

iOS

For additional security and peace-of-mind, iX500 uses sound-waves to help ensure each page is scanned.

Roller" technology to minimize jams and multi-feeds.









## ScanSnap ixsoo

#### **Quick Menu saves time!**



Quick Menu for Windows® shown

The ScanSnap Quick Menu for PC and Mac automatically pops up after scanning to provide you a variety of ways to be immediately productive with your scans. It can be easily customized to display just your favorites, present a recommendation, and even display custom profiles.

#### **Accelerated Searchable PDF creation**

Making PDF files searchable at the point of scanning is a great



way to keep them instantly accessible and now you can create a searchable PDF at nearly the same speed as a standard PDF.

#### Scan there! ScanSnap Folder

Scan to virtually any application or web service that can open, insert or attach a PDF or JPEG file from your Windows® computer.



#### Organize business cards



CardMinder for Windows® shown

Scan, store, and edit business card information with the bundled CardMinder software for Mac and PC and even export data into other applications like Address Book, Excel, and Salesforce.

#### Scan to Cloud

For the ultimate in accessibility to your scans across multiple platforms, computers and devices, iX500 provides operators a convenient way to scan directly to your existing Evernote, Dropbox, Google Docs, SugarSync and Salesforce accounts.



### ScanSnap iX500 Deluxe model



For Windows® users, Rack2-Filer Smart is a feature-rich scanning and content viewing application incorporating an ultra-intuitive bookcase and binder interface that gives users a familiar and enjoyable interaction with their scanned paperwork. Magic Desktop is designed to organize scans from ScanSnap as well as memos and images from mobile devices and upload your information to Facebook.



· · · · · · · · · · · · · · · · · · ·	ecifications				
Product Nar	me / Part Number	ScanSnap iX500 / PA03656-B005			
Scanner Type		Automatic Document Feeder (ADF), Duplex Scanning			
Scanning Modes		Color, Grayscale, Monochrome, Automatic Detection (color / grayscale / monochrome <sup>3</sup> detection)			
Image Sens	or	Color CIS ( Contact Image Sensor ) x 2 (from	t / back)		
Light Source	е	3 Color LED (Red / Green / Blue)			
Ci	Auto Mode 2	Simplex or Duplex, 25 pages per minute (pp	nm)		
Scanning Speed	Normal Mode	Color & Grayscale 150 dpi, Monochrome 300 dpi, Simplex/Duplex, 25 ppm			
(A4	Better Mode	Color & Grayscale 200 dpi, Monochrome 400 dpi, Simplex/Duplex, 25 ppm			
portrait) 1	Best Mode	Color & Grayscale 300 dpi, Monochrome 600 dpi, Simplex/Duplex, 25 ppm			
p	Excellent Mode 3	Color & Grayscale 600 dpi, Monochrome 12	200 dpi, Simplex/Duplex, 7 ppm		
Document	Normal Mode without Carrier Sheet		A4, A5, A6, B5, B6, Business Card, Post Card, Letter, Legal and Custom Size. Max: 8.5 X 14.17 in. (216 X 360 mm), Min: 2 X 2 in. (50.8 X 50.8 mm) <sup>3</sup> .		
size	Normal Mode with Carrier Sheet <sup>3</sup>		Use of a Carrier Sheet permits the scanning of A3, B4, 11 x 17 in. and photographs as well as the document sizes listed above		
	Long Paper Scanning <sup>3, 4</sup>	34 inches in length (863 mm)			
Multi-feed o	detection	Supported (Standard) ultrasonic multi-feed detection sensor			
Paper Weight (Thickness)		11 to 56 lb (40 to 209 g/m²)     As Size: 34 to 56 lb (127 to 209 g/m²)     Cards: (ISO7810 lb-1 type conforming) can be used. (thickness 0.76 mm or less)     Embossed card: useable (Landscape only)			
Paper Chute	e Capacity 5	Maximum 50 sheets (A4 (letter size) at 21 lb or 80 g/m²)			
Interface		USB 3.0 (USB 2.0 / USB 1.1 Compatible) 6			
	Observed standards	IEEE802.11b / IEEE802.11g / IEEE802.11n			
	Communication mode	Infrastructure mode			
Wi-Fi	Frequency 8	2.412 GHz to 2.462 GHz / 2.412 GHz to 2.472 GHz			
Interface 7	Communication	Indoors, 50 m (Recommended: indoors, with			
	distance	*May vary depending on the surrounding environment and the access point to be connect			
	Security 9	WPA-PSK (TKIP / AES), WPA2-PSK (TKIP / AES), WEP (64-bit / 128-bit)			
D D	Easy installation	WPS2.0 supported (button / PIN code)			
Power Requ	irement	AC 100 to 240 V, 50 / 60 Hz	Loow		
	USB connected	Operating Mode	20 W or less		
Power Consumption		Standby Mode	1.6 W or less (Wi-Fi Switch Off) 20 W or less		
oonoumpilon	Wi-Fi connected	Operating Mode	2.5 W or less		
		Standby Mode			
Operation E	nvironment	Temperature	41 to 95 °F (5 to 35 °C)		
Dimensions (M.: D.: II) 10		Relative humidity	20 to 80 % (No Condensation)		
Dimensions (W x D x H) 10  Device Weight		11.5(W) x 6.2(D) x 6.6(H) in. (292 x 159 x 168 mm)			
Environmental Compliance		6.62 lb (3.0 kg)			
chvironinental compliance		ENERGY STAR® compliant / RoHS <sup>11</sup>			
Driver		Specific driver: • Windows®: Does not support Twain/ISIS® • Mac OS: Does not support Twain			
Limited Warranty		1 Year Limited Warranty. For full details, visit www.fcpa.fujitsu.com/warranties or call (800) 626-4686			
Service Options		In-warranty Upgrade: Advance Exchange. Post-Warranty: Advance Exchange Plus, Depot Plus, ScanAid Kit, Cleaning and Consumable Kit. For full details on all service programs, visit www.lmagingService.com			

1: Scanning speeds may vary due to the system environment used. 2: Documents measuring 5.8 inches (148 mm) in length or less are scanned in "Best Mode", while other documents are scanned in "Best Mode". 3: Only Computer connection. 4: ScanSnap NSO0 is capable of scanning documents that exceed A4 size in length. ScanSnap NSO0 supports the scanning of longer documents in all modes except in "Excellent Mode". 5: Maximum capacity varies depending upon paper weight. 6: Some computers do not recognize the ScanSnap when it is connected to a LSB 3.0 port. In this case, please use a USB 2.0 port. 7: Only Android™ / I/OS in case of Wi-Fi connection. 8: Values depends on Country. 9: EEE802.1X Authentication is not supported. 10: Excluding the staker and other external attachments. 11: PPU LIMITED, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).

Software	Windows®	Mac OS	
Driver 12, 13	ScanSnap Manager V6.0	ScanSnap Manager V6.0	
	ScanSnap Organizer V5.0	_	
Applications	CardMinder™ V5.0	CardMinder™ V5.0	
	ABBYY FineReader for ScanSnap™ 5.0	ABBYY FineReader for ScanSnap™ 5.0	
	_	ABBYY FineReader Express Edition for Mac 8.3	
	Scan to Microsoft® SharePoint® 3.4	_	
	Adobe® Acrobat® X Standard	_	
	Evernote for Win 4.5	Evernote for Mac 3.3	

12: Twain or ISS® applications cannot be used directly. 13: "One button" image file JPEG, PDF and searchable PDF) generation. These functions are operable with ScanSnap Manager (ScanSnap specific driver)

Included items

1 ScanSnap     1 AC Cable     1 AC Adapte     1 USB cable		1 Safety Precautions     1 Setup DVD-ROM     1 Adobe® Acrobat® DVD-ROM (PC Only)     1 ScanSnap Carrier Sheet	1 Rack2-Filer Smart with Magic Desktop (Bundled with ScanSnap iX500 Deluxe Only)	
Consumables				
Description	Model Number	Remarks		
Roller Set	PA03656-0001	Lifetime: Every 200,000 sheets or one year. (For ScanSnap iX500 only)		
Cleaner F1	PA03950-0352	100 ml bottle For use on the Brake roller and Pick roller		
Cleaning wipe	PA03950-0419	1 pack (24 sheets) For use on the Brake roller and Pick roller		
* These recommended lifetimes are for 21 lh (RO n/m²) Ad sized documents. Therefore, appropriate replacement lifetimes may vary from other document types.				

# \* These recommended lifetimes are for 21 lb, (80 g/m²) A4 sized documents. Therefore, appropriate replacement lifetimes may vary from other document types. 6/2017 Figlist Computer Products of America, Inc. All rights reserved. Fullists and the Figlists logo are registered trademarks of Figlists United. ABBYY\*\* Firefeleader\*\* Engine @/2011 ABBYY, OCR by ABBYY, ABBYY and FineReader are trademarks of ABBYY. Adobe, Acrobat are either registered trademarks or trademarks of Lodobe Systems incorporated in the United States and/or other countries. Everage Corporation. Google, Google Docs, Android and Google Play are registered trademarks or trad



Windows®						
Compatible operating systems		Windows® 8 (32-bit / 64-bit)	Windows® 7 (32-bit / 64-bit)	Windows Vista® (32-bit / 64-bit)	Windows® XP (32-bit)	
	ScanSnap Manager V6.0	Supported	Supported	Supported 16	Supported 17	
	ScanSnap Organizer V5.0	Supported	Supported	Supported 16	Supported 17	
	CardMinder™ V5.0	Supported	Supported	Supported 16	Supported 17	
Driver/	ABBYY FineReader for ScanSnap™ 5.0	Supported	Supported	Supported 16	Supported 17	
Application 14, 15	Scan to Microsoft® SharePoint® 3.4	Supported	Supported	Supported 16	Supported 17	
	Adobe® Acrobat® X Standard 18	Supported 19	Supported	Supported 16	Supported 17	
	Evernote for Win 4.5	Supported	Supported	Supported 16	Supported 17	
Hardware Require- ments	CPU <sup>20</sup>	Intel® Core™ 2 Duo 2.2 GHz or higher (Recommended: Intel® Core™ i5 2.5 GHz or higher)				
	Memory Capacity <sup>20</sup> 64-bit: 2 GB or more (Recommended: 4 GB or more) 32-bit: 1 GB or more (Recommended: 4 GB or more)					
	Display	1,024 × 768 pixels or higher	800 x 600 pixels or more			
	Disk Capacity 21	4,010 MB free hard disc space for installation				
	DVD-ROM Drive	Required for installation				
	USB Port <sup>20, 22</sup> USB3.0 <sup>23</sup> / USB2.0 / USB1.1					

14: This product supports Microsoft® Windows® . 15: Please refer to the ScanSnap Website for latest support information. 16: For use with Service pack 2 or higher. 17: For use with Service pack 3 or higher. 18: Requires Internet Explorer 7.0 or later; or, Firefox 3.5 or later. 18: Please refer to Adobe Systems Incorporated website for latest support information. 20: Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. 21: .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager. ScanSnap Organizer or Cardifilding™ for systems that do not have NET Framework 5.5 SP1 installed. 22: ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. 23: Some computers do not recognize the ScanSnap when it is connected to a USB 3.0 port. In this case, please use a USB 2.0 port. "System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

Mac OS					
Compatible operating systems		Mac OS x v10.8	Mac OS X v10.7	Mac OS X v10.6	
	ScanSnap Manager V6.0	Supported	Supported 26	Supported 27	
	CardMinder™ V5.0	Supported	Supported 26	Supported 27	
Driver/ Application	ABBYY FineReader for ScanSnap™ 5.0	Supported	Supported <sup>26</sup>	Supported 27	
24, 25	ABBYY FineReader Express Edition for Mac 8.3	Supported	Supported <sup>26</sup>	Supported 27	
	Evernote for Mac 3.3	Supported	Supported <sup>26</sup>	Supported 27	
	CPU <sup>28</sup>	Intel® Core™ 2 Duo 2.2 GHz or higher (Recommended: Intel® Core™ i5 2.5 GHz or higher)			
Hardware	Memory Capacity <sup>28</sup>	2 GB or more (Recommended: 4 GB or more)			
Require-	Display 1,024 × 768 pixels or more			ore	
ments	Disk Capacity	2,090 MB free hard disc space for installation			
	DVD-ROM Drive Required for installation				
	USB Port <sup>28, 29</sup> USB3.0 <sup>30</sup> / USB2.0 / USB1.1			1.1	

24: This product supports Mac operating systems. 25: Please refer to the ScanSnap Website for latest support information. 26: Recommended: 10.7.4 or later 27: Recommended: 10.6.8 or later 28: Scansing speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. 28: ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. 30: Some computers do not recognize the ScanSnap when it is connected to a USB 3.0 port. In this case, please use a USB 2.0 port. 1 System requirements may change depending on the duration of support policy of the companies that make the software listed in the table above.

Rack2-Filer Smart V1.0 / Magic Desktop V1.0 31, 32, 33 System Requirements (Bundled with ScanSnap iX500 Deluxe only)						
Compatible operating systems			Windows® 8 (32-bit / 64-bit) 34	Windows® 7 (32-bit / 64-bit) 35	Windows Vista® (32-bit / 64-bit) <sup>36</sup>	Windows® XP (32-bit) 37
(	CPU		Intel® Pentium® 4 1.8 GHz or higher (Recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)			
Hardware	Memory c	apacity	2 G	B or more (Recomm	ended: 4 GB or mor	e)
Require-	Dioplay		1,024 x 768 pixels or higher			
ments	Disk Capacity	System drive 38	_	64-bit: 2 GB or more		_
1 1 2			— 32-bit: 850 MB or more			
		Installation drive	1GB or more disc space* for each software *Additional space is required for the data created by Rack2-Filer Smart and Magic Desktop			
Supported scanners			ScanSnap iX500, S1500, S1500M, S1300i, S1300, S1100			
		Model	iPad series, iPhone series (4 or later),			
Supported mol	bile	Model	iPod touch series (4th generation or later)			
devices		0S	iOS 4.3 or later			
		Application	Rack2-Filer Smart for iOS1.1.0 or later			

31: This product only supports Microsoft<sup>®</sup> Windows<sup>®</sup>, 32: Please refer to the the Rack2-Filer Smart Website and the Magic Desktop Website. 33: When installing Magic Desktop, Internet connection is required. 34: Rack2-Filer Smart and Magic Desktop runs as a desktop application. 35: For use with Service pack 1 or higher. 36: For use with Service pack 2 or higher. 37: For use with Service pack 3 or higher. 38: This is the free capacity required when .NET Framework 4: is not installed.

Options		
Description	Model Number	Remarks
ScanSnap Carrier Sheets 39	PA03360-0013	5 Carrier Sheets Intended for ScanSnap iX500, S1500, S1500M, S510, S510M, S500 and S500M
ScanSnap Bag	PA03951-0651	Intended for ScanSnap iX500, S1500, S1500M, S510, S510M, S500 and S500M

39. Although ScanSnap Carrier Sheets have a listed lifespan of 500 scans, the lifespan may vary with usage. ScanSnap Carrier sheets are intended to scan paper documents with weights of 127 g/m² or less. They also support the scanning of folded documents that are as large as 216 x 297 mm.

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

#### Fujitsu Computer Products of America, Inc.

1250 East Arques Avenue Sunnyvale, CA 94085-4701 (800) 626-4686 (408) 746-6000

• info@fcpa.fujitsu.com • http://us.fujitsu.com/fcpa

