HP Engage Go 13.5" Convertible System





HP Engage Go 13.5" Convertible System



Front View

- 1. Front-facing camera LED
- 2. Front-facing camera
- 3. Power button

Components Overview



HP Engage Go 13.5" Convertible System with Grip Rear View

- 1. Rear-facing camera
- 2. Volume up/down
- 3. Fingerprint reader (Optional)**
- 4. Pogo pin connector to convertible dock
- 5. NFC


- 6. Power button
- 7. 2 USB-C® 3.1 ports
- 8. Barcode scanner trigger buttons*
- 9. SIM Module
- 10. Ingenico Moby 5500M (Optional)*** or MSR (Optional)****
- 11 Barcode scanner upward or downward facing (Optional)

^{*}Only available on select SKUs

^{**}Optional feature sold separately or as an add-on feature.

^{***}The Moby/5500M for HP Engage Go 13.5" is available for United States only and excludes integrated battery. No payment, integrated payment and payment ready available. Non-Ingenico One Gateways require Ingenico firmware updates.

^{*****}MSR is an optional feature available in select countries and requires the HP Engage Go 13.5" to be configured at purchase with payment enabled mechanical ID.

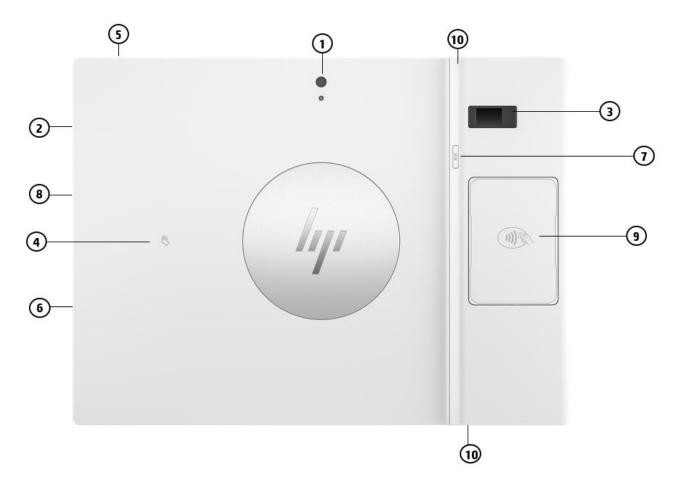

HP Engage Go 13.5" Mobile System with Grip Rear View

- 1. Rear-facing camera
- 2. Volume up/down
- 3. Fingerprint reader (Optional)**
- 4. NFC
- 5. Power button

- 6. 2 USB-C® 3.1 ports
- 7. Barcode scanner trigger buttons*
- 8. SIM Module
- 9. Ingenico Moby 5500M (Optional)*** or MSR (Optional)****
- 10. Barcode scanner upward or downward facing (Optional)


^{*}Only available on select SKUs

^{**}Optional feature sold separately or as an add-on feature.

^{***}The Moby/5500M for HP Engage Go 13.5" is available for United States only and excludes integrated battery. No payment, integrated payment and payment ready available. Non-Ingenico One Gateways require Ingenico firmware updates.

^{****}MSR is an optional feature available in select countries and requires the HP Engage Go 13.5" to be configured at purchase with payment enabled mechanical ID.

HP Engage Go Convertible System Basic I/O Connectivity Base (Rear/Side View)

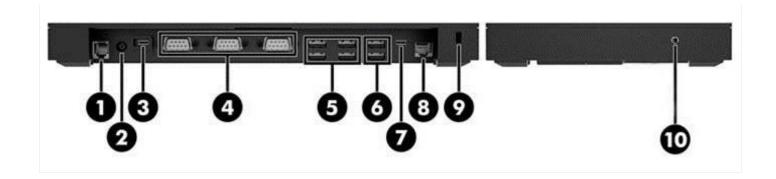


Basic I/O Connectivity Base components

- 1. Cash drawer jack
- 2. Power connector
- 3. USB Type-C® power port
- 4. Powered serial ports (3)
- 5. USB 2.0 ports (4)
- 6. USB 3.0 ports (2)

- 7. USB Type-C® port
- 8. RJ-45 network jack
- 9. Security cable slot
- 10. Headset jack

IMPORTANT: To avoid damage to the computer, DO NOT plug a telephone cable into the cash drawer jack.

Advanced I/O Connectivity Base (Rear/Side View)

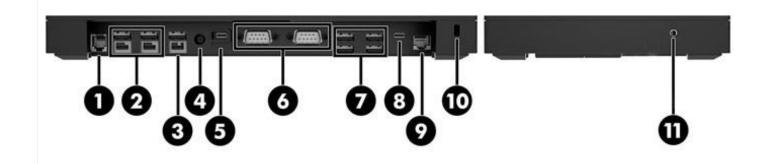

Advanced I/O Connectivity Base components

- 1. Cash drawer jack
- 2. Powered USB 12 V ports (2)
- 3. Powered USB 24 V port
- 4. Power connector
- 5. USB Type-C® power port
- 6. Powered serial ports (2)

- 7. USB 3.0 ports (4)
- 8. USB Type-C® port
- 9. RJ-45 network jack
- 10. Security cable slot
- 11. Headset jack

IMPORTANT: To avoid damage to the computer, DO NOT plug a telephone cable into the cash drawer jack.

Overview

HP Engage Go 13.5" Case

Model

HP Engage Go 13.5" Case 6M422AV

HP Engage Go13.5 Case can protect an Engage Go 13.5 from a drop up to 48 inches(4 feet) high on to carpet.*, **

Integrated hand strap

Dimensions: 310 x 231.6 x 16.4 mm 31 x 23.16 x 1.64 cm 12.2x 9.12 x 0.65 in

Weight: HP Engage Go 13.5" Case: 234.44g 0.52 lbs

The weight of the HP Engage Go 13.5 Case does not include the shoulder strap.

- * MIL-STD-810H testing is not intended to demonstrate fitness of U.S. Department of Defense (DoD) contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Pack.
- ** HP Total Test Process test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Pack.

***Accessories sold separately.



Overview

HP Engage Go Dock



- 10 degree tilt adjustability (angle is set between 50 and 60 degrees)
- 180 degree swivel in either direction
- Choice of standard or printer column
- HP Smart Dock (locking, unlocking)
- Push release button with LED (Amber, White, Green) for unlocking
- Pogo pin interface (power, USB, video), magnet-assisted connection with tablet
- Stability plate (attaches to HP Advanced and Basic Connectivity Base)
- Optional countertop mounting bracket
- Configurable with connectivity base
- Ebony Black or Ceramic White color

Dimensions (W X D X H)

Convertible Dock (standard column)



Overview

28.39 x 16.17 cm x 24.53 cm (283.9 x 161.7 mm x 245.3 mm) 11.18 x 6.37 in x 9.66 in 9.60 cm diameter (96 mm) 3.78 in diameter

Convertible Dock (printer column) 28.39 x 16.17 cm x 28.52 cm (283.9 x 161.7 mm x 285.2 mm) 11.18 x 6.37 in x 11.23 in 9.60 cm diameter (96 mm) 3.78 in diameter

Weight (Grams, lbs.)

Convertible Dock (standard column) 2480g (5.49lbs)

HP Engage Go Magnetic Stripe Reader

Model

HP Engage Go Magnetic Stripe Reader

6K9B2AA

Enable your HP Engage Go with an integrated magnetic stripe reader that supports a multitude of card types for customer use and employee authentication.* This easy to use reader adds functionality to conduct business wherever it 's needed.

Dimensions:

81x 54x 12.5mm (3.19x 2.12 x .49 inches)

Weight:

37 grams

*Hardware supports Payment Module or Magnetic Stripe Reader, not both. MSR is an optional feature available in select countries and requires the HP Engage Go to be configured at purchase with payment enabled mechanical ID. *AMO kit only comes with MSR module.



Overview

HP Engage Go 13.5" Mobile

- Up to 5G (US only)8
- Windows® 11 Pro 64⁷, Windows® 10 IoT Enterprise 2021 LTSC 64-Value, FreeDOS
- 11th Generation Intel® Core™ i3-1110G4 & Intel® Core™ i5-1140G7 Processor¹
- 13.5" diagonal, WUXGA+ (1920x1280) IPS, Touch with Corning® Gorilla® Glass 5, 340nits, sRGB100%.
- M.2 2230 solid state drives
- Soldered down LPDDR4x memory
- 3-cell, 42Whr⁹ Long Life CB with Fast Charge Battery⁵
- 802.11 ax Wi-Fi[®] (2x2)¹⁰
- Bluetooth® 5.0 connectivity (combo card with Wi-Fi 6¹¹)
- LTE/HSPA+ with GPS WWAN options available
- NFC
- Optional integrated Ingenico Moby 5500M (US only)⁶, MSR, Fingerprint reader, and barcode scanner^{2,3}
- IP 54 rating⁴
- Ebony Black or Ceramic White color

¹Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

²Accessories sold separately.

³HP Engage Go 13.5" with optional Payment will void IP rating. Optional payment available in US only. Test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Service.

⁴ IP54: Test results are not a guarantee of future performance under these test conditions. Accidental damage requires an optional HP Accidental Damage Protection Care Pack. HP Engage Go 13.5" Convertible System is IP54 rated. If unit has optional payment device IP rating goes down to IP40.

⁵Recharges the battery up to 50% within 30 minutes when the system is off or in standby mode. Power adapter with a minimum capacity of 65 watts is required. After charging has reached 50% capacity, charging will return to normal. Charging time may vary +/-10% due to System tolerance.

⁶The Moby/5500M for HP Engage Go 13.5" is available for United States only and excludes integrated battery. No payment, integrated payment and payment ready available. Non-Ingenico One Gateways require Ingenico firmware updates.

⁷ Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See http://www.windows.com.

Intel® 5G module is optional and must be configured at the factory. Module designed for 5G NR NSA (non-standalone) networks as carriers deploy Evolved-Universal Terrestrial Radio Access New Radio Dual Connectivity (ENDC) with both 100Mhz of 5G NR and LTE channel bandwidth, using 256QAM 4x4 as defined by 3GPP. Module requires activation and separately purchased service contract. Check with service provider for coverage and availability in your area. Data connection, upload and download speeds will vary due to network, location, environment, network conditions, and other factors. Backwards compatible to 4G LTE and 3G HSPA technologies. 5G module planned to be available in select platforms and select countries, where carrier supported.

⁹Actual battery Watt-hours (Wh) will vary from design capacity. Battery capacity will naturally decrease with shelf life, time, usage, environment, temperature, system configuration, loaded apps, features, power management settings and other factors.

¹⁰Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs.

¹¹Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs. The specifications for Wi-Fi 6 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ax WLAN devices. Only available in countries where 802.11ax is supported.



Overview

DIMENSIONS AND WEIGHT

Dimensions (W X D X H)

Base Height 24.63 cm (246.34 mm) 9.7 in

Height from base to top of HP Engage Go 13.5" Convertible System When tilted down

- 28.58 cm
- 285.8 mm
- 11.24 in

When tilted up

- 29cm
- 290 mm
- 11.417 in

Retail Tablet Tablet only: 11.81 x 8.72 x 0.5 in 30 x 22.16 x 1.27 cm

Weight (Grams, lbs.)

Retail Tablet (case not included) 1045q (2.303 lbs)*

Retail Tablet with HP Engage Go 13.5" Case* 1279.44g (2.823 lbs)*

* Starting weight. Weight will vary by configuration.

PORTS

(2) USB-C[®] 3.1 supports PD 2.0 and DP1.2 Alt mode (1) pogo pin connector to convertible dock (select models)

SERVICE AND SUPPORT

3-year standard parts, labor and onsite limited warranty. Online technical support is available seven days a week, 24 hours a day. Certain restrictions and exclusions apply. Depending on country; 3-year limited warranty on primary battery. Optional HP Care Pack Services are extended service contracts which go beyond your standard warranties. Service levels and response times for HP



Overview

Care Packs may vary depending on your geographic location. Restrictions and limitations apply. Service starts at date of hardware purchase. For details, visit http://www.hp.com/go/cpc.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp



Features

OPERATING SYSTEM

Preinstalled

Windows 11 Professional (64-bit)*
Windows 10 IoT Enterprise 2021 LTSC 64-bit*
FreeDOS

*Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See http://www.windows.com.

PROCESSOR

Intel® 11th generation Core™ processors^{1,2}

- Intel® Core™ i3-1110G4 with Intel® UHD Graphics (up to 3.9 GHz with Intel® Turbo Boost Technology, 6 MB L3 cache, 2 cores, 4 threads)
- Intel® Core™ i5-1140G7 with Intel® Iris® Xe Graphics (up to 4.20 GHz with Intel® Turbo Boost Technology, 8 MB L3 cache, 4 cores, 8 threads), supports Intel® vPro® Technology^{3,4,5,6}

¹Chipset is integrated with processor.

²Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

Intel® Turbo Boost technology requires a PC with a processor with Intel Turbo Boost capability. Intel Turbo Boost performance varies depending on hardware, software and overall system configuration. See www.intel.com/technology/turboboost for more information.

⁴For full Intel® vPro® functionality, Windows 10 Pro 64 bit or higher, a vPro supported processor, vPro enabled chipset, vPro enabled wired LAN and/or WLAN card and TPM 2.0 are required. Some functionality requires additional 3rd party software in order to run. See http://intel.com/vpro fintel® Iris® Xe Graphics capabilities require system to be configured with Intel® Core™ i5 or i7 processors and dual channel memory. Intel® Iris® Xe Graphics with Intel® Core™ i5 single channel memory will only function as UHD graphics.

⁶Intel vPro® requires Windows 10 Pro 64 bit or higher, a vPro supported processor, vPro enabled chipset, vPro enabled wired LAN and/or Wi-Fi 6E WLAN and TPM 2.0. Some functionality requires additional 3rd party software in order to run. Features of vPro® Essentials and Enterprise vary. See http://intel.com/vpro



Features

MEMORY

Memory Soldered Down

LPDDR4X 4266: 4096MB Total System Memory 8192MB Total System Memory 16384MB Total System Memory

*Onboard memory not customer accessible/upgradeable

STORAGE

Internal Storage Device

Supports M.2 SSD 2230

SSD 256GB 2230 PCIe NVMe Value

* For hard drives and solid state drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 36 GB (for Windows 10) of system disk is reserved for the system recovery software.

DISPLAY

Internal

13.5 in diagonal WUXGA+ (1920 x 1280) BrightView UWVA WLED+LBL sRGB NB2Y 400 eDP 1.4+PSR2 Low-Power 100 bent LCD

Display response time: 30ms (typ.) & 35ms (max)

Contrast Ratio: 1500:1 Refresh Rate: 60Hz

Features:

- 1920 x 1280 High Definition * resolution**
- 3:2 aspect ratio
- Brightness (typical) 340 nits (cd/m²)***
- 10-point capacitive touch solution, direct bonding
- Anti-smudge with Corning® Gorilla® Glass 5

GRAPHICS

Intel® Iris® Xe Graphics with shared video memory*



^{*}High definition (HD) content is required to view high-definition images

^{**}Resolutions are dependent upon monitor capability, and resolution and color depth settings.

^{***} All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Features

*Intel® Iris® Xe Graphics capabilities require system to be configured with Intel® Core™ i5 or i7 processors and dual channel memory. Intel® Iris® Xe Graphics with Intel® Core™ i5 or 7 processors and single channel memory will only function as UHD graphics.

NETWORKING/COMMUNICATIONS

Integrated Wi-Fi*

Intel® Wireless-AC AX201 802.11ac 2x2 Wi-Fi® and Bluetooth® 5.0 Combo Adaptor, non-vPro® Intel® Wireless-AC 8265 802.11ac 2x2Wi-Fi® and Bluetooth® 5.0 Combo Adaptor, vPro®

WLAN Antennas (2) (configured with panel on all units)
Bluetooth® Disabled IOPT
Support for Miracast
Supports WLAN/LAN/WWAN switching
Support HP Connection Optimizer
Support S4 Wake on Wireless LAN
Support for DYNAMIC Wi Fi SAR in BIOS

WWAN

Intel® XMM™ 7560 LTE Advanced Pro CAT 16**
Intel 5G Solution 5000 WWAN***

SIM Module: (user-accessible on side of slate) (4FF/nano SIM). (SIM module installed in factory when Service Provider is configured)

WWAN Antennas (2 for 4G, 3 for 5G)

WWAN cards are compatible with a programmable removable eSIM

NFC

NXP NPC300 Near Field Communication Module

*Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. Wi-Fi 6 (802.11ax) is backwards compatible with prior 802.11 specs. The specifications for Wi-Fi 6 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ax WLAN devices. Only available in countries where 802.11ax is supported.

** WWAN is an optional feature, requires factory configuration and separately purchased service contract. Check with service provider for coverage and availability in your area. 4G LTE not available on all products, in all regions.

*** Intel® 5G module is optional and must be configured at the factory. Module designed for 5G NR NSA (non-standalone) networks as carriers deploy Evolved-Universal Terrestrial Radio Access New Radio Dual Connectivity (ENDC) with both 100Mhz of 5G NR and LTE channel bandwidth, using 256QAM 4x4 as defined by 3GPP. Module requires activation and separately purchased service contract. Check with service provider for coverage and availability in your area. Data connection, upload and download speeds will vary due to network, location, environment, network conditions, and other factors. Backwards compatible to 4G LTE and 3G HSPA technologies. 5G module planned to be available in select platforms and select countries, where carrier supported.

¹vPro® is only supported on the HP Engage Go Mobile (Intel® Core™ i5-7Y57 processor) in wireless mode when configured with the Intel WLAN AX201 with vPro® Card

NXP NPC300 Near Field Communication Module

Main chipset NXP NPC300



Features

Frequency	13.56 MHz			
NFC Standards	ISO/IEC 14443A, ISO/IEC 14443B PCD			
	FeliCa PCD mode			
	Mifare PCD encryption mechanism			
	ISO/IEC 15693/ICODE VCD mode			
	NFC Forum tags			
	NFCIP-1/NFCIP-2 protocol			
	EMVCo 2.0.1 for PICC and PCD mode			
	NFC Forum Wave 1 and Wave 2			
	ETSI/SCP 102 613 and 102 622 for SWP/HCI			
Host interface NCI protocol interface according to NFC Forum NCI 1.0 standardization				
	I ² C High-speed mode supported			
I ² C Address	0x29			
Host connector	15 pin FPC/FFC			
Antenna connector	7 pin FPC/FFC			
Operation temperature	-25~80°C			
Storage temperature	-25~125°C			
Weight	0.81g			



Features

AUDIO/MULTIMEDIA

Audio

HD Audio Audio Solution Codec ALC3247 Stereo Speakers (1)

Cameras

RGB Camera: Front facing camera 2MP with webcam LED indicator World facing Camera: 8MP IR Camera

Sensors

Accelerometer Gyroscope Ambient light sensor Magnetometer

POWER

Power Supply

HP 65W USB Type-C® AC Adapter non-PFC, Length: DC = 1.8m - Supports HP Fast Charging**

Battery*

3-cell Long Life CB 42Whr-supports fast charging**,****
Battery life: Up to 10 hours***

- *MM18 Battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See http://www.bapco.com/ for additional details.
- **Recharges the battery up to 50% within 30 minutes when the system is off or in standby mode. Power adapter with a minimum capacity of 65 watts is required. After charging has reached 50% capacity, charging will return to normal. Charging time may vary +/-10% due to System tolerance.
- *** Battery life not including payment. MM18 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.
- ****Actual battery Watt-hours (Wh) will vary from design capacity. Battery capacity will naturally decrease with shelf life, time, usage, environment, temperature, system configuration, loaded apps, features, power management settings and other factors.



Features

Barcode scanner

Image Sensor		1280*800 CMOS
Illumination		White LED
Aiming		650nm laser
Scan Angle		Roll: 360°, Pitch ±60°, Skew±60°
Field of View		Horizontal 42°, Vertical 28°
Symbologies	2D	PDF 417, QR Code, Micro QR, Data Matrix, Aztec, Maxicode, GM Code, Chinese
		Sensible Code, Micro PDF417, CodeOne
	1D	Code 11, Code 128, Code 39, GS1 128 (UCC/EAN-128), AIM 128, Codabar, ISBT 128,
		Code 93, UPC-A, UPC-E, Coupon, GS1 Composite, EAN-13, EAN-8, ISSN, ISBN,
		Interleaved 2 of 5, Matrix 2 of 5, ITF14, ITF6, Industrial 25, Standard 25, China Post
		25, MSI Plessey, Plessey, GS1 Databar (RSS), Code 49, Code 16k
	Postal Code	USPS Postnet, Royal Mail, USPS Planet, KIX Post, Australian Postal
	OCR	Passport MRZ (OCR-B)

Typical Depth of Field

EAN-13	75-400mm (13 mil)	
Code 39	100-250mm (5mil)	
PDF417	80-225mm (6.7mil)	
Data Matrix	75-215mm (10 mil)	
QR Code	45-295mm (15 mil)	

¹ Barcode quality and environmental conditions may affect performance.



Technical Specifications

SOFTWARE AND SECURITY

BIOS

HP BIOSphere Gen69

Secure Erase

Absolute Persistence Module¹

Allow BIOS Rollback

HP DriveLock & Automatic DriveLock

Hardware Root or Trust

HP BIOS Protection (NIST 800-147)

HP SpareKey

Hybrid Boot

Master Record Security

Measured Boot

Power On Authentication

Pre-Boot Security

Connectivity

HP MAC Address Manager

HP Connection Optimizer

Platform Enabling Apps & Support

HP 3D DriveGuard *

HP Hotkey Support

HP Notifications

HP LAN/WLAN/WWAN switching

HP Power Manager * (w/ thermals support)

Microsoft Products

Buy Office

Bing Search

Client Security Software

HP Client security Gen76

Intel Authenticate v2.5

HP Sure Start Gen68

HP Sure Recover Gen 415

HP Sure Run Gen 415

HP Multi-Factor Authenticate

HP Sure Admin Gen 1

Intel® vPro® Support12

Manageability

Intel vPro® (Core i5 SKU only) HP Smart Dock



Technical Specifications

HP Client Security Gen 7

HP MAC Address Manager

HP PC Hardware Diagnostics

HP Hardware Diagnostics Windows

Discover HP Touchpoint Manager

HP Driver Packs (quarterly)3

HP System Software Manager (SSM)3

HP BIOS Config Utility (BCU)3

HP Client Catalog³

HP Client Integration Kit (CIK)

HP Client Security & Intel Authenticate

Microsoft Device Guard¹⁰

Credential Guard¹⁰

TPM config management

HP Audio Control

HP Power Manager

HPIA Integration & Recipes

Recipes

HP MIK for Microsoft SCCM Gen 55

HP Image Assistant Gen6

HP Wolf Security16

For more information on HP Client Management Solutions refer to: http://www.hp.com/go/clientmanagement.

Standard

TPM 2.0 SLB9670 (Infineon; soldered down)
Drive encryption pre-boot (Password)

Optional

HP Fingerprint Reader¹⁴

- 1. BIOS Absolute Persistence module is shipped turned off, and will be activated when customers purchase and activate a subscription. Service may be limited. Check with Absolute for availability outside the U.S. The optional subscription service of Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: http://www.absolute.com/company/legal/agreements/computrace-agreement. If Data Delete is utilized, the Recovery Guarantee payment is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either create a PIN or purchase one or more RSA SecurID tokens from Absolute Software. 2. Skype is not offered in China.
- 3. Not preinstalled, however available for download at http://www.hp.com/go/clientmanagement
- 4. Requires Windows and Internet Access
- 5. HP Manageability Integration Kit can be downloaded from

http://www8.hp.com/us/en/ads/clientmanagement/overview.html

- 6. Requires Windows and Intel®.
- 7. HP Sure Click is available on select HP platforms and supports Microsoft® Internet Explorer, Google Chrome, and Chromium™. Supported attachments include Microsoft Office (Word, Excel, PowerPoint) and PDF files in read only mode. Check http://h20195.www2.hp.com/v2/GetDocument.aspx?docname=4AA7-0922ENW for all compatible platforms as they become available.
- 8. HP Sure Start Gen6 is available on the HP Engage Go Convertible equipped with 11th generation Intel® processors.
- 9. HP BIOSphere Gen4 is available on the HP Engage Go Mobile equipped with 7th generation Intel® processors.
- 10. Microsoft Device Guard and Credential Guard are available with Windows 10 IoT Enterprise delivered from HP or to customers with a volume license to use Windows 10 Enterprise. Microsoft Device Guard and Credential Guard are not available with Windows 10 Pro. The installation of Windows 10 Enterprise and Microsoft Device Guard and Credential Guard are available through HP Configuration & Deployment Services.
- 11. HP Sure Run, Sure Recover is supported on Win 10 Pro & Win 10 IoT Enterprise 2019 LTSC.
- 12. vPro® support also requires a vPro WLAN Card for these products. Intel® vPro® supported processor required.



Technical Specifications

14. Optional feature sold separately or as an add-on feature.

15. HP Sure Run, Sure Recover is supported on Win 10 Pro or higher & Win 10 loT Enterprise 2019 LTSC or higher.

16. HP Wolf Security for Business requires Windows 10 or 11 Pro and higher, includes various HP security features and is available on HP Pro, Elite, RPOS and Workstation products. See product details for included security features.

TEMPERATURE, HUMIDITY, ALTITUDE

Temperature Operating 41° to 95° F (5 to 35° C)

Non-operating -4° to 140° F (-20° to 60° C)

Relative humidity Operating 10 to 90%

(noncondensing)

Shock Operating 40G, 2ms, half-sine wave

Non-operating 240G, 2ms, half-sine wave

Random Vibration Operating 1.043 grms

Non-operating 3.5grms

Altitude Operating -50 to 10,000 ft (-15 to 3,048 m) (unpressurized) Non-operating -50 to 40,000 ft (-15 to 12,192 m)

ENVIRONMENTAL DATA

Eco-Label Certifications & declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: • IT ECO declaration • US ENERGY STAR® • US Federal Energy Management Program (FEMP) • EPEAT® registered in the United States. See http://www.epeat.net for registration status in your country. • China Energy Conservation Program (CECP) • China State Environmental Protection Administration (SEPA) • Taiwan Green Mark • Korea Eco-label • Japan PC Green label*			
Sustainable Impact Specifications	 15% post-consumer recycled plastic Low halogen Outside Box and corrugated cushions are 100% sustainably sourced and recyclable Recycled Plastic cushions Bulk packaging available 			
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".			
Energy Consumption (in accordance with US ENERGY STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz	
Normal Operation (Short idle)	4.81 W	4.89 W	4.67 W	
Normal Operation (Long idle)	0.74 W	0.78 W	0.75 W	
Sleep	0.74 W	0.78 W	0.75 W	
Off	0.31 W 0.35 W 0.31 W			
	family. HP computers marked with th	s for an ENERGY STAR® compliant prod se ENERGY STAR® Logo are compliant v PA) ENERGY STAR® specifications for co	with the applicable U.S.	



Technical Specifications

					d is for a typically configured PC dows® operating system.	
Heat Dissipation*		VAC, 60Hz	230VAC,		100VAC, 50Hz	
Normal Operation (Short idle)	16	.5 BTU/hr	16.7 BT	U/hr	16 BTU/hr	
Normal Operation (Long idle)	2.	5 BTU/hr	2.7 BTI	J/hr	2.6 BTU/hr	
Sleep	2.	5 BTU/hr	2.7 BTI	J/hr	2.6 BTU/hr	
Off		1 BTU/hr	1.2 BTI			
	NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.					
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	one noun			ound Pressure L _{pAm} , decibels)		
Typically Configured – Idle		2.6			14.4	
Fixed Disk – Random writes		2.6			14.5	
Optical Drive – Sequential reads	2.6			14.5		
Longevity and Upgrading	This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.					
	 directive - 2011/65/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This product is in compliance with the IEEE 1680 (EPEAT) standard, see www.epeat.net Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043. This product is 97.4% recycle-able when properly disposed of at end of life. 					
HP Engage Go 13.5 Single	unit (includin	g stand) Packaging:	:			
Packaging Materials	External:	PAPER/Corrugated		986 grams		
	Internal:	al: PAPER/ Corrugated			1,472 grams	
	PLASTIC/Polyethylene low density – LDPE			29 grams		
HP Engage Go 13.5 Head-	unit Only (with	Optional detached	Hub) Packaging:			
Packaging Materials	External:	PAPER/Corrugated			598 grams	
	Internal: PAPER/ Corrugated			588 grams		
	PLASTIC/Polyethylene low density – LDPE 15 grams					
	The plastic packaging material contains at least 100% recycled content. The corrugated paper packaging materials contains at least 14.9% recycled content.					
RoHS Compliance	restrictions i	n the European Uni rldwide through th		Hazardous Substantibuted to the dev	irst companies to extend the ances (RoHS) Directive to ou velopment of related	



Technical Specifications

Technical Specifica	tions
	We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.
	We met our voluntary objective to achieve worldwide compliance with the new EU RoHS requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.
	To obtain a copy of the HP RoHS Compliance Statement, see HP RoHS position statement.
Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf): • Asbestos • Certain Azo Colorants
	 Certain Brominated Flame Retardants – may not be used as flame retardants in plastics Cadmium Chlorinated Hydrocarbons Chlorinated Paraffins Formaldehyde
	 Halogenated Diphenyl Methanes Lead carbonates and sulfates Lead and Lead compounds Mercuric Oxide Batteries
	 Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. Ozone Depleting Substances
	 Polybrominated Biphenyls (PBBs) Polybrominated Biphenyl Ethers (PBBEs) Polybrominated Biphenyl Oxides (PBBOs) Polychlorinated Biphenyl (PCB)
	 Polychlorinated Terphenyls (PCT) Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. Radioactive Substances
Packaging Usage	 Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) HP follows these guidelines to decrease the environmental impact of product packaging: Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
	 Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials.
	 Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Manageme and Recycling	HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Technical Specifications

	The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers . These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.
HP Inc. Corporate Environmental Information	For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/PC_GBU_Product_Design_ISO_14K_ Certificate.pdf and
footnotes	 http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf Percentage of ocean-bound plastic contained in each component varies by product Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. External power supplies, WWAN modules, power cords, cables and peripherals excluded. 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. Fiber cushions made from 100% recycled wood fiber and organic materials. Plastic cushions are made from >90% recycled plastic.

EPEAT® registered1

ENERGY STAR® certified**

Low halogen*

508 compliance

Mercury-free display backlights and arsenic-free display glass

All HP computing products are delivered by SmartWay carriers***

Recycled Packaging³

The plastic recycled content is equal to, or greater than 90%².

The main cushions for the HP Engage Go 13.5" Mobile unit and HP Engage Go Dock stand are made from 100% recycled expanded polyethylene⁴.

Eligible for free recycling or cash back through HP's Planet Partners Recycling and Consumer Buyback programs (http://www.hp.com/go/easybuyback)****

HP Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html

Environment website: http://www.hp.com/environment

1. Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit www.epeat.net for more information.



Technical Specifications

EPEAT® registered where applicable. EPEAT registration varies by country. See www.epeat.net for registration status by country. (When Product is launched)

- 2. 5% ocean bound plastics in speaker enclosure.
- 3. 100% outer box/corrugate cushion packaging made from sustainably sourced certified and recycled fibers.
- 4. Fiber cushions made from 100% recycled wood fiber and organic material. Any plastic cushions are made from >90% recycled plastic. Excludes plastic bags and plastic foam sheeting.
- * External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.
- ** ENERGY STAR® is a registered trademark of the U.S. Environmental Protection Agency.
- *** Designation based on actions to reduce transportation-related emissions. SmartWay: US only. (14e) Free recycling in select countries.
- **** Program may not be available in your area. Check http://www.hp.com/qo/recycling to see if HP offers free recycling in your area

COUNTRY OF ORIGIN

China



Options and Accessories (sold separately and availability may vary by country)

<u>Type</u> Case	<u>Description</u> HP Engage Go 13.5" Case	<u>Part #</u> 6M422AV
Docking	HP Engage Go Dock Black HP Engage Go Dock White	5JG51AA 5JG52AA
Input/Output	HP Engage Go Advanced I/O Connectivity Base HP Engage Go Basic I/O Connectivity Base HP Engage Go Advanced I/O Connectivity Base White	5LT84AA 5LT86AA 5LT85AA
	HP Engage Go Basic I/O Connectivity Base White	5LT87AA
Hub Covers	HP Engage One Hub Cover Black HP Engage One Hub Cover White	5DS16AA 5DS17AA
HP Engage Go Tilt Mount HP Engage	HP Engage One Undercounter Mount Kit HP Engage Go Tilt Mount HP Engage Go Fixed Mount* HP Engage Go Height Adjustable Pole* age Go Fixed Mount and HP Engage Go Height Adjustable Pole sold separately.	5DS15AA 9GF87AA 9GF88AA 9GF89AA
TIF Eligage do Till Moulit, HP Eliga	ige do i ineu mount and fir Engage do fieight Aujustable role sold Separately.	



Summary of Changes

Date of change:	Version History:	Description of change:
	From v1 to v2	



Copyright © 2022 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Pentium and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor and used by HP Inc. under license. Microsoft and Windows are U.S. registered trademarks of the Microsoft group of companies. ENERGY STAR® is a registered mark owned by the U.S. Environmental Protection Agency. USB Type-C and USB-C are trademarks of USB Implementers Forum.SD, SDXC, and MicroSD, are trademarks or registered trademarks of SD-3C in the United States, other countries or both.

