

Overview

HP USB-C 100W TAA G6 Dock




1. (1) Mechanical power button with RGB LED¹
2. (1) USB Type-C 3.2 Gen 2 (10 Gbps) port with data and power out (15W)
3. (1) USB Type-A 3.2 Gen 2 (10 Gbps) charging port
4. (1) Nano security lock slot

1. The dock power button may support non-HP notebooks that have implemented USB Power Delivery specification to support Extended Alert messages.

Technical Specifications

HP USB-C 100W TAA G6 Dock

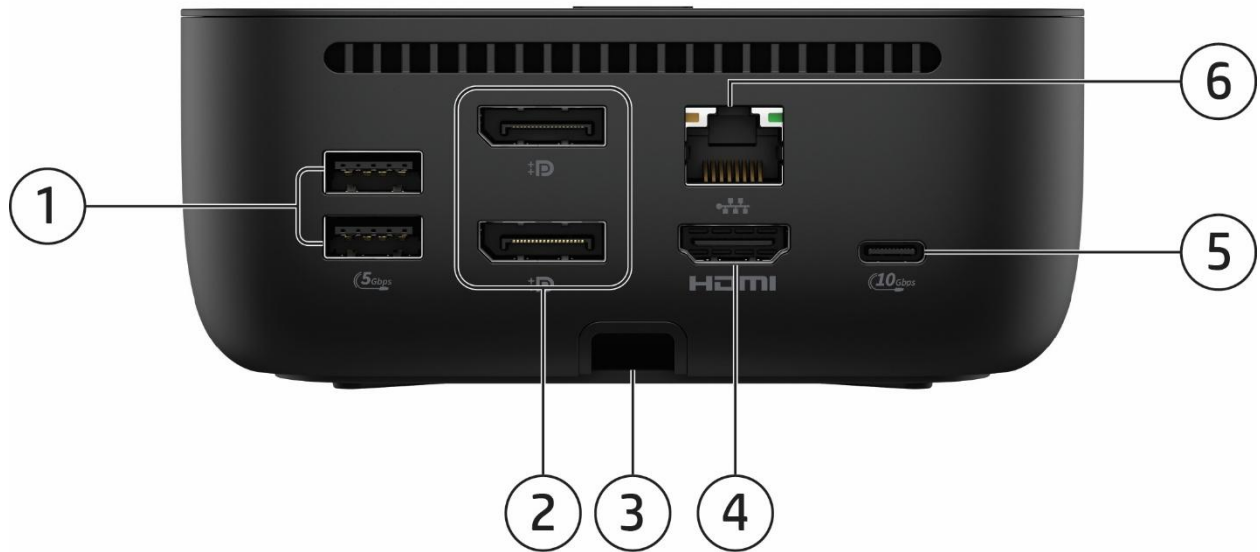

- | | |
|--|--|
| 1. (2) USB Type-A 3.2 Gen 1 (5 Gbps) charging port | 4. (1) HDMI 2.1 port |
| 2. (2) DisplayPort 1.4 | 5. (1) USB Type-C 3.2 Gen 2 (10 Gbps) port with data and power out (15W) |
| 3. (1) USB-C cable connector | 6. (1) Ethernet port (2.5 Gbps) ¹ |

1. Requires infrastructure that supports 2.5GB Ethernet speeds.

Technical Specifications

HP USB-C 100W TAA G6 Dock



- 1. (1) USB-C cable connector
- 2. Bottom cover latch

(1) RGB LED bar

Technical Specifications

Components	
Part Number	HP USB-C 100W TAA G6 Dock - 9X467AA
Dimensions (HxWxD)	4.76 x 4.76 x 2.0 in (12.1 x 12.1 x 5.1 cm)
Weight	1.49 lb (680 g)
Cable Type	USB-C
Cable Length	1 m (3.2 ft)
Security	HP Wolf Security ² with HP Sure Start ³
Supported Operating Systems⁴	Windows 10 and above ChromeOS macOS Linux ThinPro
Supported platforms⁵	Tested and supported on select HP commercial PCs. For HP notebook compatibility please visit - https://pcb.inc.hp.com/webapp/#!/us-en and search by notebook. Tested and supported on select 3 rd party PCs. Contact your local sales representative to learn more.
Supported HP Quick Connect platforms	N/A
Systems Management	System network manageability in any power state (HP with HP)
Top Components	Mechanical power button with RGB LED indicator to power or wake host system ⁶
Front Components	(1) USB Type-C 3.2 Gen 2 (10 Gbps) port with data and power out (15W) (1) RGB LED bar
Right Side Components	(1) USB Type-A 3.2 Gen 2 (10 Gbps) port with charging (1) Nano security lock slot
Back Components	(2) USB Type-A 3.2 Gen 1 (5 Gbps) ports with charging (1) USB Type-C 3.2 Gen 2 (10 Gbps) port with data and power out (15W) (2) DisplayPort 1.4 (1) HDMI 2.1 (1) Ethernet port (2.5 Gbps) (1) USB-C cable (10 Gbps) to connect to host system
Dock LED⁷	Power button: RGB LED: White, Blue, Amber, Green, Red LED Bar: RGB LED: White, Blue, Amber, Green, Red
Manageability Features	HP CMSL eTag Disconnected Firmware updates PXE Boot Wake on LAN (from the Off, Sleep or Hibernation States) MAC address pass-through (from the On, Off, Sleep or Hibernation States) WLAN-LAN Switching
Networking/Communications	N/A
Management Software¹⁰	Poly Lens ¹¹ (Desktop)

Technical Specifications

Software Included¹⁰	myHP
Power to System	Up to 100W on HP and non-HP systems
External Displays Supported	Up to 3 external displays and 1 PC display or Up to 3 external displays
Maximum Resolution Supported¹²	Up to 4K
Maximum Refresh Supported¹²	Up to 120Hz
Ethernet speeds	2.5 Gbps
Video Resolutions Supported¹²	Multi-Function PCs: (1) 4K @120hz* (2) QHD @120hz* (3) FHD @120hz* High-Resolution PCs with DP Alt. Mode: (1) 4K @120hz* (2) 4K @120hz* (3) 4K @60hz* *NOTE: Requires DisplayPort 1.4 support with Display Stream Compression
Certifications	DisplayPort
Operating voltage and current	19.5V, 6.15A
Power delivery (PD) profiles	5V/3A, 9V/3A, 12V/5A, 15V/5A, 20V/5A
Operating temperature (Celsius)	0°C to 35°C
Operating temperature (Fahrenheit)	32°F to 95°F
Non-operating temperature (Celsius)	-20°C to 60°C
Non-operating temperature (Fahrenheit)	-4°F to 140°F
Operating humidity	10% to 90%
Non-operating humidity	5-95%
Operating altitude	-15 m to 3,048 m
Non-operating altitude	-15 m to 12,192m
Security Slot Type	1x Nano security slot ¹³
Warranty	3-0-0
What's in the Box	HP USB-C 100W TAA G6 Dock, 120W power adapter, product notice, warranty card.
Country of Origin	Mexico

1. For full data and video capability, the PC must support either: DisplayPort alt mode, Thunderbolt 3 alt mode, or USB4 through its USB-C port. Charging and port replication are supported on notebooks that have implemented the USB-C Power Delivery specifications. HP Quick Connect, Wake-on LAN from warm and cold dock, Wake-on LAN from S4/S5, and MAC Address Pass-Through, S0, S3, S4, S5 warm and cold dock features only

Technical Specifications

function on HP or HP supported notebooks. HP does not provide ethernet and audio drivers on Mac PCs. Power button to turn off or to wake the system depends on implementation of the related and optional Power Delivery specification.

2. HP Wolf Security for Business requires Windows 10 or 11 Pro and higher, includes various HP security features and is available on HP Pro, Elite, RPOS and Workstation products. See product details for included security features.

3. Based on HP's internal analysis of docking stations that have auto validating & self healing firmware, Meet NIST 800-173 requirements, the ability to disable the RJ-45 and a BIOS MAPT authorized list. HP Sure Start on HP Thunderbolt and USB-C G6 dock supports firmware integrity verification and recovery during dock start-up and disconnect. It does not include real-time and runtime protections or Microsoft SCCM integration typically found on HP Sure Start in HP notebooks..

4. Operating systems supported: Windows 10 22H2 and up, Win 10 IoT Enterprise LTSC 2021, Windows 11 23H2 and up, ChromeOS M133 and up, Ubuntu Linux 22.04 LTS with 5.15 kernel, ThinPro OS 8.0 and MacOS Sonoma 14. Not all features work with all operating systems, ask your sales representative about compatibility with your PC. Linux, ChromeOS, MacOS, and ThinPro OS testing currently underway and expected to be completed after launch.

5. Our docks are tested and validated with most HP USB-C and Thunderbolt 4 systems as well as tested with select 3rd party systems like Dell, Lenovo, and Apple. Contact your local sales representative to learn more.

6. The dock power button may support non-HP notebooks that have implemented USB Power Delivery specification to support Extended Alert messages.

7. Please refer to the User Guide for LED light behaviors. The User Guide can be found on <https://support.hp.com/>

8. Your computer might support Wake on LAN from the Off, Sleep or Hibernate States, or only when the computer is On or in Sleep.

9. Your computer might support MAC address pass-through the On, Off, Sleep or Hibernate States, or only when the computer is On or in Sleep.

Thunderbolt™ host systems require Thunderbolt™ software (minimum SW17.x). Ethernet drivers need to be installed separately on non-HP Windows systems for headset auto switching functionality. Drivers available on HP website. For Apple PCs, HP does not provide ethernet and audio drivers.

Firmware updates on Window-based host systems only. Certain features are not functional on non-HP supported nor non-HP notebooks:

- Power button to turn on or wake the system.
- Wake on LAN from warm and cold dock.
- Wake on LAN from S4/S5.
- MAC Address pass-through S0, S3, S4, S5 warm and cold dock.

10. Feature(s) not available on TAA docks.

11. Poly Lens is a cloud-based device management solution that provides actionable insights and analytics around unified communications endpoints like Poly voice, video, headset devices, and select HP docking stations and can be sold as a stand-alone service. Internet access is required. Not available on TAA versions. Visit lens.poly.com to set-up an account.

12. Video resolution and support is dependent on the maximum capability of the notebook.

13. Compatible with the following HP locks: 63B28AA HP Nano Combination Cable Lock, 63B31AA HP Essential Nano Combination Cable Lock.

Summary of changes

Date of change	Version		Description of change
	V1 to V2		
	V2 to V3		
	V3 to V4		
	V4 to V5		
	V5 to V6		
	V6 to V7		
	V7 to V8		
	V8 to V9		
	V9 to V10		
	V10 to V11		
	V11 to V12		
	V12 to V13		
	V13 to V14		
	V14 to V15		
	V15 to V16		

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Thunderbolt™ is a trademark of Intel Corporation in the U.S. and other countries. USB Type-C® and USB-C® are trademarks of USB Implementers Forum.