

# Epson PowerLite<sup>®</sup> 1915

## MULTIMEDIA PROJECTOR

| Product Name           | Product Code | UPC             |
|------------------------|--------------|-----------------|
| PowerLite 1915         | V11H313020   | 0 10343 87475 6 |
| Replacement Lamp       | V13H010L53   | 0 10343 87483 1 |
| Replacement Air Filter | V13H134A24   | 0 10343 87484 8 |

### Specifications

**Projection System**  
Epson 3LCD, 3-chip optical engine

**Projection Method**  
Front/rear/ceiling mount

**Driving Method**  
Epson Poly-silicon TFT Active Matrix

**Pixel Number**  
786,432 dots (1024 x 768) x 3

**White Light Output<sup>1</sup>**  
4000 lumens (ISO 21118 Standard)

**Color Light Output<sup>1</sup>**  
4000 lumens

**Aspect Ratio**  
4:3

**Native Resolution**  
1024 x 768 (XGA)

**Resize**  
640 x 480 (VGA), 800 x 600 (SVGA),  
1024 x 768 (XGA), 1440 x 900 (WSXGA),  
1400 x 1050 (SXGA+), 1600 x 1200 (UXGA)

**Lamp Type**  
E-TORL 230 W UHE

**Lamp Life<sup>2</sup>**  
Up to 3500 hours (ECO Mode)  
Up to 2500 hours (Normal Mode)

**Throw Ratio Range**  
1.62 – 2.61

**Size (projected distance)**  
30" – 300" 4:3 aspect (3' – 50.6')

**Keystone Correction Automatic**  
Vertical: ± 30 degrees (± 45 manual)  
Horizontal ± 20 degrees (± 30 manual)

**USB Plug 'n Play**  
Mac compatible via DVI to VGA adapter (not included)  
USB Plug 'n Play for Windows<sup>®</sup> 2000 or later

**Contrast Ratio**  
Up to 2000:1

**Color Reproduction**  
16.77 million colors

### Projection Lens

**Type**  
Powered focus  
Manual (optical) zoom

**F-number      Focal Length**  
1.75 – 2.42      24 mm – 38.2 mm

**Zoom Ratio**  
Optical zoom 1.0 – 1.6

<sup>1</sup>Light output varies depending on modes (color and white light output). White light output measured using ISO 21118 standard.

<sup>2</sup>Data source: ProjectorCentral.com, Jan. 2009. Average of 796 shipping models, for which manufacturers provided lumens and total power data, all resolutions and brightness levels.

<sup>3</sup>Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

<sup>4</sup>See our website for convenient and reasonable recycling options at [www.epson.com/recycle](http://www.epson.com/recycle)

<sup>5</sup>Recommendation based on normal room conditions. Cleaning requirements may vary depending on use, environment and other conditions. Cleaning intervals may be adjusted to accommodate the environment in which the projector is used.

**Epson America, Inc.**  
3840 Kilroy Airport Way, Long Beach, CA 90806

**Epson Canada, Ltd.**  
3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

[www.epson.com](http://www.epson.com)  
[www.epson.ca](http://www.epson.ca)

Specifications and terms are subject to change without notice. Epson, Easy Management, EasyMP, E-TORL and Instant Off are registered trademarks, Epson Exceed Your Vision is a registered logo-mark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. PowerLite and PrivateLine are registered trademarks, Duet is a trademark and Epson Connection is a service mark of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2009 Epson America, Inc. CPD-30489 10/09

### Other

**Display Performance**  
NTSC: 480 lines  
PAL: 560 lines  
(Depends on observation of the multi-burst pattern)

**Input Signal**  
NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/SECAM

**Interfaces**  
Computer/component video: D-sub 15 pin x 2  
S-video: Mini DIN x 1  
Composite video: RCA x 1  
Audio in x 3 (RCA (L&R) x 1, mini stereo x 2)  
Variable audio out: Mini stereo x 1  
USB connector: Type B x 1 (USB display and mouse/keyboard control), Type A x 2 (for USB memory device/Epson doc camera)  
Serial: RS-232c x 1  
LAN networking: RJ-45 x 1  
Monitor out: Mini D-sub 15 pin x 1  
Wireless LAN port: 802.11 a/b/g

**Speaker**  
10 W (mono)

**Operating Temperature**  
41 ° to 95 °F (5 ° to 35 °C)

**Power Supply Voltage**  
100 – 240 V ±10%, 50/60 Hz

**Power Consumption**  
341 W  
Communication on: 5.5 W standby  
Communication off: 0.2 W standby

**Fan Noise**  
29 dB (ECO Mode)  
37 dB (Normal Mode)

**Security**  
Kensington<sup>®</sup>- style lock provision, security anchor bar

### Dimension (W x D x H)

Including feet: 14.1" x 10.12" x 3.74"  
Excluding feet: 14.1" x 10.12" x 3.4"  
Weight: 7.82 lb

### Remote Control

**Features**  
Search, comp, video, USB, LAN, power, aspect, color mode, volume, e-zoom, A/V mute, freeze, menu, page up and down, help, auto, mouse functions, user, ID num, pointer, esc, enter

**Operating Angle      Operating Distance**  
Right/left: ± 30 degrees      26' (8 m)  
Upper/lower: ± 30 degrees

### Support — The Epson Connection<sup>SM</sup>

Pre-sales support  
U.S. and Canada      800-463-7766  
Internet website      [www.epson.com](http://www.epson.com)

**Service Programs**  
Two-year projector limited warranty, Epson Road Service program, Epson PrivateLine<sup>®</sup> dedicated toll-free support and 90-day lamp limited warranty

**What's In The Box**  
Power cord, computer cable (VGA), USB cable, wireless LAN unit, soft carrying case, projector remote control, batteries, user manual CD, projector software CD, Quick Setup Sheet, PrivateLine support card, and password protection sticker

### Accessory Part Numbers

|   |            |
|---|------------|
| Replacement wireless LAN module             | V12H306P11 |
| Quick Wireless Connection USB key           | V12H005M06 |
| Universal projector ceiling mount           | ELPMBPJF   |
| Advanced projector ceiling mount            | ELPMBPRG   |
| High-security projector ceiling mount       | ELPMBATA   |
| Adjustable suspended ceiling channel kit    | ELPMBP01   |
| False ceiling plate kit                     | ELPMBP02   |
| Structural round ceiling plate              | ELPMBP03   |
| Adjustable extension column (pipe) 8" – 11" | ELPMBPC01  |
| Component to VGA video cable                | ELPKC19    |
| S-video cable                               | ELPSV01    |
| SwissGear <sup>®</sup> backpack             | ELPKS63    |
| 50" portable screen                         | ELPSC06    |
| 60" portable pop-up screen                  | ELPSC07    |
| 80" portable pop-up screen                  | ELPSC08    |
| Duet <sup>™</sup> screen                    | ELPSC80    |
| Epson DC-06 document camera                 | V12H321001 |
| Kensington security lock                    | ELPSL01    |
| Distribution amplifier                      | ELPDA01    |
| Replacement lamp                            | V13H010L53 |
| Replacement air filter                      | V13H134A24 |

**EPSON**<sup>®</sup>  
EXCEED YOUR VISION



## **Epson PowerLite<sup>®</sup> 1915** MULTIMEDIA PROJECTOR



### **The smart, network-ready performer.**

Get brilliant presentations in any classroom or boardroom with the ultra bright, network-ready Epson PowerLite 1915. This powerful, portable projector yields vivid, high quality images, yet still includes a host of user-friendly features, such as a wireless module for easy wireless setup. With Epson 3LCD technology, XGA resolution and 4000 lumens of color/white light output<sup>1</sup>, your presentations will pop in any setting. The PowerLite 1915 offers remarkable versatility with innovative features like Screen Fit, powered focus and more. With HDMI digital connectivity, you can bring digital content to your presentations. The PowerLite 1915 even makes it easy to broadcast customized images or announcements over the network.

**Brilliant detail** — native XGA (1024 x 768) resolution and up to 2000:1 contrast ratio

**Incredible image quality, anytime, day or night** — 4000 lumens color light output, 4000 lumens white light output<sup>1</sup>



# Epson PowerLite® 1915 MULTIMEDIA PROJECTOR

## The best-selling projectors in the world.


Epson offers a wide range of high-quality projectors to meet almost any need. Built with image quality and reliability in mind, Epson projectors enhance communication and inspire collaboration, while offering a low total cost of ownership. From ultraportable projectors designed for educational settings to boardroom-ready business projectors, Epson has the model made for you.



### 3LCD technology — for quality and color that's beyond amazing

#### Innovative technology with proven reliability

- 3 chips for full-time, vibrant color
- 25% less electricity required per lumen of brightness when compared to 1-chip DLP projectors<sup>2</sup>
- Road-tested reliability from a company with over 20 years of experience

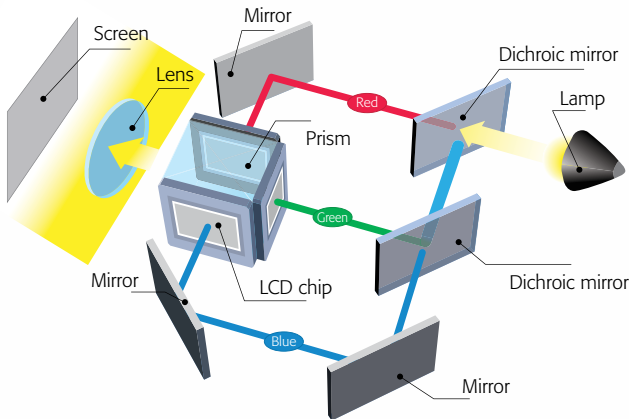

▲ 3LCD, 3-chip technology

### Amazing light output

- 4000 lumens color light output and 4000 lumens white light output<sup>1</sup>
- High color light output for bright, balanced, colorful images
- White light output that's measured using ISO 21118 (a more rigid standard than the outdated ANSI lumens rating used by competitive products)




High color light output

Low color light output

Actual photographs of images taken from two competing projectors run in default mode. Price, resolution and brightness (white light output) are the same for both projectors.

### Energy-efficient E-TORL® lamp, exclusively from Epson

- Delivers more lumens per watt and lasts up to 3500 hours<sup>3</sup>
- Minimizes both light diffraction and light leakage
- E-TORL lamps maximize your presentation time, while minimizing your costs

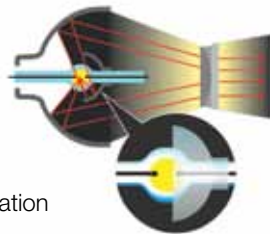

▲ E-TORL lamp



▲ Compact and portable design



#### Eco features

- Energy-efficient 3LCD light engine
- Energy-efficient E-TORL lamp
- Designed to be recycled<sup>4</sup>
- RoHS compliant

#### Better Products for a Better Future™

For more information on Epson's environmental programs, go to [eco.epson.com](http://eco.epson.com)



# Precision control

## USB Plug 'n Play instant setup

- No more pressing computer function keys or carrying bulky VGA cables
- Just plug in a standard USB cable and instantly project video with audio from your PC!
- This USB connection also enables you to maintain control over your presentation with the page up/page down function on the remote control



## Fast, easy setup and control

- **Instant Off®** — no cool-down time required, so it's ready to shut down when you are
- **A/V Mute Slide** — control your presentation; it's right at your fingertips
- **Sleep Mode** — set from 1 to 30 minutes to save energy when the A/V Mute Slide is closed or no signal is detected
- **1.6x optical zoom** — offers great positioning flexibility
- **Direct Power On/Off** — power the projector on and off with the flip of a wall switch

## Epson's leading-edge EasyMP® network technology

### Built-in wireless features

- Present wirelessly using the 802.11 a/b/g module via a PC or Mac®; transmit audio as well
- Use the optional Wi-Fi® Quick Connect key for faster wireless setup (PC only)

### PC-free presentations

- Connect a memory device and start your presentation — all without a PC
- Display MPEG2 and MPEG4 videos as well as photos
- Compatible with a whole host of file formats (JPEG, GIF, BMP, PNG)

### Easy Management®

- Remotely access, monitor and control projectors over the network; centralized control
- Enjoy easy management and maintenance via Simple Network Management Protocol (SNMP)
- Send e-mail notifications to alert network administrators when there are issues related to the temperature, fan and lamp status



## PowerLite 1915 Features

- **Brilliant detail** — XGA resolution and up to 2000:1 contrast ratio
- **Convenient network accessibility** — display images over the IP network from any networked location
- **Powerful sound and communication features, no added cost** — built-in 10 W speaker, built-in closed captioning decoder
- **Cutting-edge connectivity** — RJ-45 LAN connection, HDMI port with HDCP for digital connectivity
- **Easy picture adjustments and greater positioning flexibility** — 1.6x manual zoom with powered focus, controllable via the remote or RS-232
- **Message broadcasting** — broadcasts customized images/alerts over the network for announcements or instructions
- **Added security in any environment** — convenient metal anchor bar, control panel lockout
- **Easy maintenance** — easy, side-loading lamp and one-touch filter replacement
- **Protect your investment** — recommended 2500-hour filter cleaning cycle<sup>5</sup>
- **Outstanding support** — two-year limited warranty
- **Carrying case included** — for easy portability and protection when stored

## Screen Fit

A Quick Setup function with an auto-sensing feature that intuitively sets up the appropriate screen size, keystone and focus — all at the touch of a button.



## Advanced wireless security

Epson gives you the ability to control access to your data and presentations with industry-relied-on security measures. With the broadest security protection, the PowerLite 1915 is ideal for corporate applications; compatible with LEAP, PEAP, WPA2 and more.

## Movie sending

Discover extra possibilities in seconds and experience big-screen enhancements. Now, you can send full-size movies in MPEG format, including images and sound, via either a wireless or wired LAN.