




The Amulet Hotkey DXZ4 is a quad video head PCoIP® zero client, designed to provide class leading, long-term performance in the most demanding of applications. The DXZ4 provides an extensive set of unique and advanced features not found in other remote computing solutions.

When connected to a remote PCoIP host such as VMware Horizon, Amazon Workspaces or a range of Amulet Hotkey workstations, DXZ4 zero clients provide quad video head, pixel perfect performance at the desktop, a very low noise and heat signature, and connection points for the widest range of USB and audio peripherals. Dual redundant network ports, locking power sockets and a configurable control panel enhance resilience where it is needed most.

UK Government Security Certification

The DXZ4-A and DXZ4-AM zero client have been certified as secure by CESG, the National Technical Authority for Information Assurance within the UK. The CESG assists Government Departments with cyber security and have certified and approved the DXZ4-A/AM for use at the 'OFFICIAL' level within Government and public sector organizations.

TEMPEST versions of this product, approved to NATO SDIP-27 Level A and Level B by our TEMPEST-certified CESG and NATO partners, are available on special request. Contact Amulet Hotkey sales for more information.

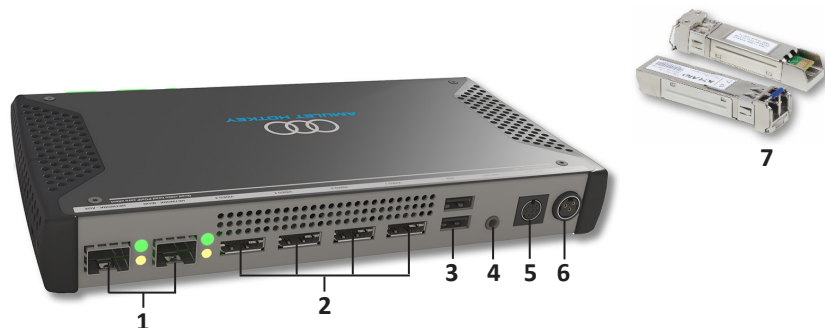

DXZ4-M rear view. 1 Network connections. 2 DisplayPort sockets. 3 USB ports. 4 Audio socket. 5 Feature connector. 6 DC inlet. 7 SFP modules.

www.amulethotkey.com



DXZ4 PCoIP zero client

Datasheet

Certified Product



Foundation Grade
RDT5722298

Key features

- Compact and highly secure PCoIP zero client
- Supports high-resolution displays: quad video up to 1920x1200, dual video up to 2560x1600
- Connect multiple DXZ4 clients to support additional displays such as octal video up to 1920x1200 or quad video up to 2560x1600
- Exceptional performance including real-time video and demanding 3D graphics
- Connect to virtual desktops, cloud managed desktops or for the most demanding graphics, connect to remote physical or virtual workstations
- Easy to configure and manage

Network connections

- Supports redundant network connections with dual network interfaces and options for SFP modules for copper or fibre optic cabling
- Supports remote connections that can be local, across country, or continent-to-continent

Security

- Only display pixels are sent to the client so no sensitive data ever reaches the client
- Zero Clients have no X86-processor, no Windows or Linux client OS, no client GPU and no local storage which eliminates exploits common with other client endpoints
- Extensive security features including support for 256-bit AES encryption, NSA Suite-B ciphers, smart card, proximity card, SIPR tokens and much more

EMEA Sales

+44 (0)20 7960 2400
emeasales@amulethotkey.com

N America Sales

+1 (212) 269 9300
ussales@amulethotkey.com

APJ Sales

+61 409 930 884
apsales@amulethotkey.com

Latin America Sales

latamsales@amulethotkey.com

Defence and Security

security@amulethotkey.com

Head Office

Amulet Hotkey Ltd
Cavalier Road, Heathfield Industrial Estate,
Newton Abbot, Devon TQ12 6TQ, UK
+44 (0)1626 837900

Technical Support

EMEA: eurosupport@amulethotkey.com
N America: ussupport@amulethotkey.com

About PCoIP systems

PCoIP systems are fully secure and support build to a lossless image, making them ideal for the most demanding of applications. Amulet Hotkey PCoIP zero clients are desktop devices that connect to a remotely located 'host' using the PCoIP protocol.

DXZ4 models

The DXZ4 is available in four versions. The DXZ4 and DXZ4-A have dual RJ45 network ports. The DXZ4-M and DXZ4-AM have dual network ports that accept fiber or copper SFP modules (see the *SFP Modules Datasheet* for details). The DXZ4-A and DXZ4-AM are CESG CPA certified versions.



Towards greener computing

©2017 Amulet Hotkey Ltd. All rights reserved.

Information in this document is subject to change. No part of this document may be reproduced through any means including (but not limited to) electronic or mechanical, without express written permission from Amulet Hotkey Ltd. Amulet Hotkey Ltd may have patents, patent applications, trademarks or copyrights or other intellectual property rights covering subject matter in this document. PC-over-IP, PCoIP and the PCoIP logo are registered trademarks of Teradici Corp. Amulet Hotkey and 'solutions you can bank on' are registered trademarks of Amulet Hotkey Ltd. Other product names and company names listed within this document may be trademarks of their respective owners. Amulet Hotkey products are designed and built in the UK.

DXZ4 Datasheet DS-DXZ4-0001 v5.0 January 2017


www.amulethotkey.com

Getting connected

DXZ4 zero clients support any user type from mainstream office desktops for task workers to the most demanding 3D performance workstations. Connection options include virtual desktops such as VMware Horizon, Cloud Managed Desktops such as Amazon Web Services Workspaces, or remote physical or virtual workstations for demanding users.

The PCoIP host can be implemented in hardware (as shown here) or in software, using VMware Horizon or Amazon Workspaces. The PCoIP host encodes USB, audio and video from the host and then compresses and encrypts the data for transmission across standard IP networks to the zero client.

The zero client then decrypts and decompresses the data, and delivers it to the desktop monitors and peripherals (such as keyboard, mouse, speakers or headset). The zero client also passes user-generated USB and audio data to the PCoIP host. The result for the user is that the desktop looks and feels like it is at their desk. Because zero clients simply decode pixels to display images, they are simpler and more secure than a traditional PC and other thin client solutions.

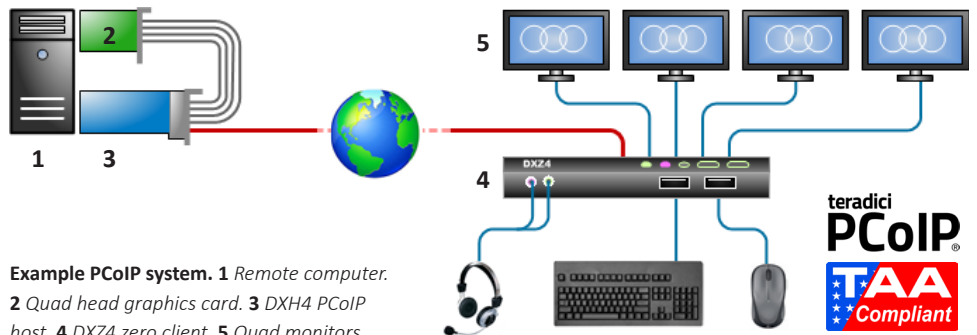

Example PCoIP system. 1 Remote computer. 2 Quad head graphics card. 3 DXH4 PCoIP host. 4 DXZ4 zero client. 5 Quad monitors.

Processor	Teradici Tera2140 PCoIP processor
Memory	512MB DDR3 RAM
Video output	4 x DisplayPort connectors (dual mode)
Display support	1920 x 1200 maximum (quad monitors) @ 60 Hz 2560 x 1600 maximum (dual monitors) @ 60 Hz
Audio connections	Stereo headset/headphones, stereo line out, stereo mic. All 3.5mm jacks
USB connections	4 x USB 2.0
Network connections	DXZ4, DXZ4-A: Dual redundant RJ45 10/100/1000 for copper cabling DXZ4-M, DXZ4-AM: Dual redundant SFP slots for 100Mbit/s or 1Gbit/s fiber or copper modules
Cooling	Passive
Case	Robust enclosure
Power consumption	Less than 12W nominal (excluding USB devices)
Temperature range	Operating: 15° to 35° C (59° to 95° F) Storage:-10° to 60° C (15° to 145° F)
Size (H x W x D)	34 x 230 x 130 mm (1.3 x 9.1 X 5.1")
Security	Strong encryption and authentication including 256-bit AES and NSA Suite-B ciphers. 2 factor authentication options including CAC/PIV cards, smart cards, prox-cards, e-tokens, SIPR tokens. IEEE 802.1X network authentication. Unique USB lockdown control. Kensington Lock slot
Compliance	TAA compliant. Conforms to relevant parts of EN55024, EN55022 and FCC Part 15. TEMPEST versions of the DXZ4 are available, approved to NATO SDIP-27 Level A and Level B by our TEMPEST-certified CESG and NATO partners

CESG Certification: The UK Government has certified the DXZ4-A and DXZ4-AM running firmware 4.8.0 (or newer) as secure for Remote Desktop Security Characteristic version 1.0 at Foundation Grade. CESG certificate number: RDT5722298.