

## MCP1650-H01AE30-AO

Mellanox® MCP1650-H01AE30 Compatible 200GBase-CU HDR QSFP56 to QSFP56 Direct Attach Cable (Passive Twinax, 1.5m)

### Features

- Compliant with SFF-8636
- Compliant with IEEE802.3bj & IEEE802.3cd
- Compliant with IEEE802.3bj & IEEE802.3cd
- Support I2C two – line strong interface, easy to control
- Support for hot plugging
- Low Crosstalk
- Low power



### Applications

- 10G/40G/100G/200G Ethernet
- Infiniband SDR, DDR, QDR, FDR, EDR, HDR
- Router
- Concentrator
- Data center, cloud server

### Product Description

This is a Mellanox® MCP1650-H01AE30 compatible 200GBase-CU HDR QSFP56 to QSFP56 direct attach cable that operates over passive copper with a maximum reach of 1.5m (4.9ft). It has been programmed, uniquely serialized, and data-traffic and application tested to ensure it is 100% compliant and functional. This direct attach cable is TAA (Trade Agreements Act) compliant, and is built to comply with MSA (Multi-Source Agreement) standards. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's direct attach cables are RoHS compliant and lead free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



## Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4
- ESD to the LC Receptacle: compatible with IEC 61000-4-3
- EMI/EMC compatible with FCC Part 15 Subpart B Rules, EN55022:2010
- Laser Eye Safety compliant with FDA 21CFR, EN60950-1& EN (IEC) 60825-1,2
- RoHS compliant with EU RoHS 2.0 directive 2015/863/EU

## Electrical Characteristics

Parameter	Requirement		Test Condition					
<b>Differential Impedance</b>								
<b>Cable Impedance</b>	105+5/-10Ω		Rise time of 25ps (20% ~ 80%).					
<b>Paddle Card Impedance</b>	100±10Ω							
<b>Cable Termination Impedance</b>	100±15Ω							
<b>Differential (Input/Output) Return Loss SDD11/SDD22</b>	$\text{Return\_loss}(f) \geq \left\{ \begin{array}{l} 16.5-2vf \quad 0.05 \leq f < 4.1 \\ 10.66-14\log_{10}(f/5.5) \quad 4.1 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the return loss at frequency f		10MHz≤f ≤19GHz					
<b>Differential to common mode (Input/Output) Return loss SCD11/SCD22</b>	$\text{Return loss}(f) \geq \left\{ \begin{array}{l} 22-(20/25.78)f \quad 0.01 \leq f < 12.89 \\ 15-(6/25.78)f \quad 12.89 \leq f \leq 19 \end{array} \right\}$ Where f is the frequency in GHz Return loss(f) is the Differential to common-mode return loss at frequency f		10MHz≤f ≤19GHz					
<b>Common mode to common-mode (Input/Output) Return loss SCC11/ SCD22</b>	Return loss (f)≥ 2dB      0.2≤f≤19 Where f is the frequency in GHz Return loss (f) is the common-mode to common-mode return loss at frequency f		10MHz≤f ≤19GHz					
<b>Low Level Contact Resistance</b>	70 milliohms Max. From initial.		EIA-634-23: Apply a maximum voltage of 20mV and current of 100 mA.					
<b>Insulation Resistance</b>	10 Mohm (Min)		EIA364-21:AC 300V 1minute					
<b>Dielectric Withstanding Voltage</b>	NO disruptive discharge		EIA-364-20: Apply a voltage of 300 VDC for 1 minute between adjacent terminals and between adjacent terminals and ground					
<b>Differential Insertion Loss Max. For TPa to TPb Excluding Test fixture</b>								
<b>Differential Insertion Loss (SDD21 Max)</b>	F AWG	1.25GHz	2.5GHz	5.0GHz	7.0GHz	10Ghz	12.89Ghz	10MHz≤f ≤19GHz
	30(1m) Max.	4.5dB	5.4dB	6.3dB	7.5dB	8.5dB	10.5dB	
	30/28(3m)Max.	7.5dB	9.5dB	12.2dB	14.8dB	18.0dB	21.5dB	
	26(3m) Max.	5.7dB	7.2dB	9.9 dB	11.9dB	14.1dB	16.5dB	
	26/25(5m)Max.	7.8dB	10.0dB	13.5dB	16.0dB	19.0dB	22.0dB	

<b>Insertion Loss Deviation</b>	$-0.176 * f - 0.7 \leq ILD \leq 0.176 * f + 0.7$	50MHz ≤ f ≤ 19GHz
<b>Differential to common mode conversion Loss-Differential Insertion Loss (SCD21-SDD21)</b>	$10 \quad 0.01 \leq f < 12.89$ $Conversion \ loss(f) - IL(f) \geq \left\{ \begin{array}{l} 27 - (29/22)f \quad 12.89 \leq f < 15.7 \\ 6.3 \quad 15.7 \leq f \leq 19 \end{array} \right\}$ <p>Where f is the frequency in GHz Conversion_loss (f) is the cable assembly differential to common-mode conversion loss IL (f) is the cable assembly insertion loss</p>	10MHz ≤ f ≤ 19GHz
<b>MDNEXT (multiple disturber near-end crosswalk)</b>	≥26dB @12.89GHz	10MHz ≤ f ≤ 19GHz
<b>Intra Skew</b>	15ps/m	10MHz ≤ f ≤ 19GHz

### Environment Performance

Parameter	Requirement	Test Condition
<b>Operating Temperature Range</b>	-20°C to +76°C	Cable operating temperature range
<b>Storage Temperature Range</b>	-40°C to +80°C	Cable storage temperature range in packed condition
<b>Thermal Cycling Non-Powered</b>	No evidence of physical damage	EIA-364-32D, Method A, -25 to 90C, 100 cycles, 15 min, dwells
<b>Salt Spraying</b>	48 hours salt spraying after shell corrosive area less than 5%	EIA-364-26
<b>Mixed Flowing Gas</b>	Pass electrical tests per 3.1 after stressing (Fpr connector only)	EIA-364-35 Class II, 14 days.
<b>Temp. Life</b>	No evidence of physical damage	EIA-364-17C w/RH, Damp heat 90°C at 85% RH for 500 hours then return to ambient
<b>Cable Cold Bend</b>	4H No evidence of physical damage	Condition: -20°C ±2°C, mandrel diameter is 6 times the cable diameter.

### Mechanical and Physical Characteristics


Parameter	Requirement	Test Condition
<b>Vibration</b>	Pass electrical tests per 3.1 after stressing	Clamp & vibrate per EIA-364-28E, TC-VII, test condition letter – D, 15 minutes in X, Y & Z axis
<b>Cable Flex</b>	No evidence of physical damage	Flex cable 180° for 20 cycles (±90° from nominal position) at 12 cycles per minute with a 1.0kg load applied to the cable jacket. Flex in the boot area 90° in each direction from vertical. Per EIA-364-41C
<b>Cable Plug Retention in Cage</b>	90N Min. No evidence of physical damage	Force to be applied axially with no damage to cage. Per SFF 8661 Rev 2.1 Pull on cable jacket approximately 1 ft behind cable plug. No functional damage to cable plug below 90N.

		Per SFF-8432 Rev 5.0
<b>Cable Retention in Plug</b>	90N Min. No evidence of physical damage	Cable plug is fixtured with the bulk cable hanging vertically. A 90N axial load is applied (gradually) to the cable jacket and held for 1 minute. Per EIA-364-38B
<b>Mechanical Shock</b>	Pass electrical tests Per 3.1 after stressing	Clamp and shock per EIA-364-27B, TC- G,3 times in 6 directions, 100g, 6ms.
<b>Cable Plug Insertion</b>	40N Max (QSFP28)	Per SFF8661 Rev 2.1
<b>Cable plug Extraction</b>	30N Max (QSFP28)	Place axial load on de-latch to de-latch plug.Per SFF8661 Rev 2.1
<b>Durability</b>	50 cycles, No evidence of physical damage	EIA-364-09, perform plug &unplug cycles:Plug and receptacle mate rate: 250times/hour. 50times for QSFP28/SFP28 module (CONNECTOR TO PCB)

### Wiring Diagram

X1	X2	Remarks	X1	X2	Remarks
18 (RX1-)	37(TX1-)	Pair	37(TX1-)	18 (RX1-)	Pair
17 (RX1+)	36 (TX1+)		36 (TX1+)	17 (RX1+)	
15 (RX3-)	34 (TX3-)	Pair	34 (TX3-)	15 (RX3-)	Pair
14 (RX3+)	33 (TX3+)		33 (TX3+)	14 (RX3+)	
6 (TX4+)	25 (RX4+)	Pair	25 (RX4+)	6 (TX4+)	Pair
5 (TX4-)	24 (RX4-)		24 (RX4-)	5 (TX4-)	
3 (TX2+)	22 (RX2+)	Pair	22 (RX2+)	3 (TX2+)	Pair
2 (TX2-)	21 (RX2-)		21 (RX2-)	2 (TX2-)	
1, 4, 7, 13, 16, 19, 20, 23, 26, 32,35,38	1, 4, 7, 13, 16, 19,20, 23, 26, 32, 35, 38	GND	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	8, 9, 10, 11, 12, 27, 28, 29, 30, 31	EEPROM point at both ends

### Mechanical Specifications

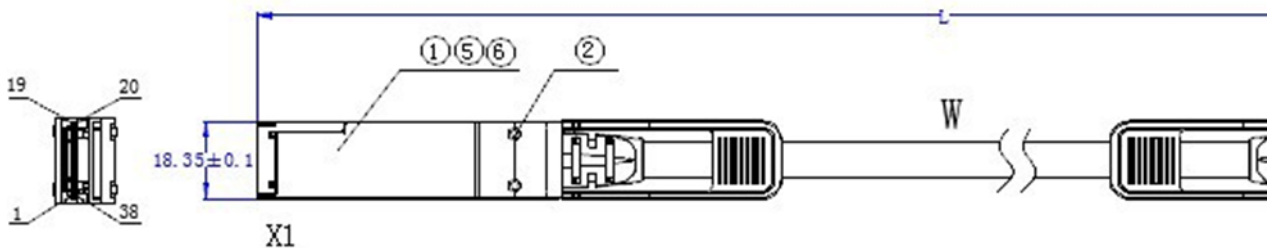

UNIT: mm

## **About AddOn Networks**

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.

## **U.S. Headquarters**

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## **Europe Headquarters**

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070