

## CF83-E Fisheye Camera

# Expansive 180° Coverage with Detailed 12.5MP Resolution



### Overview

The CF83-E fisheye camera features a large 1 / 1.6" progressive CMOS image sensor and 12.5MP resolution for great image quality amid varying lighting conditions and inclement weather. With its onboard CV72 Ambarella processor, the CF83-E delivers advanced analytics like AI-powered search, motion trajectory mapping, line crossing, and loitering alerts. The CF83-E offers wide-angle, 180-degree coverage, yet is built to minimize classic fisheye distortion, making its ePTZ mode particularly effective for live monitoring and clear investigations. The CF83-E is ideal for providing overview coverage of large areas—like city blocks, long corridors, and large interior spaces—all from a single install point.

The CF83-E is built with an in-house industrial design for durability and easy installation. It features a robust metal exterior with IP67 weather rating and IK10 impact protection, ensuring reliable performance in harsh environments. The CF83-E's design streamlines installation and large fleet deployments with features such as captive screws that remain attached to the mounting plate, a latch-based cable gland for easy PoE threading, a three-LED light status indicator, and a built-in bubble level for precise alignment.

### Key features

#### Excellent image quality

- Large 1 / 1.6" progressive CMOS image sensor
- 12.5MP resolution
- 20 meters / 66 feet of IR range for nighttime viewing

#### Durability and weather protection

- Robust metal housing
- IP67 weather rating
- K10 impact rating
- Operability between -40°C to 50°C / -40°F to 122°F ensures functionality in almost any weather condition

#### Extensive coverage and monitoring

- 180-degree coverage
- ePTZ and panoramic modes for enhanced live monitoring of large areas

#### Advanced analytics

- Onboard CV72 Ambarella processor enables people and vehicle analytics
- AI-powered search and AI-powered alerts

#### Hybrid cloud architecture

- Onboard storage and processing helps reduce bandwidth consumption, and enables coverage at scale
- 512GB - 3TB onboard storage

#### Easy installation

- Latch-based cable gland for easy PoE threading
- Captive screws in mounting plate
- Three-LED light status indicator
- Built-in bubble level



## CF83-E

### Tech Specs

#### Camera features

<b>Image Sensor</b>	1/1.6" Progressive CMOS	<b>Shutter Speed</b>	1/120 sec. to 1/32000 sec.
<b>Sensor Resolution<sup>1</sup></b>	12.5MP (3536 x 3536); resolution (3520 x 3520)	<b>Day/Night</b>	IR-cut filter for day and night function
<b>Lens Type</b>	Fixed	<b>IR Cut Filter</b>	Yes
<b>Focal Length</b>	1.7mm	<b>IR Range</b>	20m / 66ft
<b>Aperture</b>	F2.0	<b>Minimum Illumination</b>	0.009 lux @ F1.9 (Color) 0 lux with IR Illuminators on
<b>Iris</b>	Fixed	<b>Onboard Storage</b>	Capacity: From 512GB to 3TB Card: MicroSD, SDXC
<b>Field of View</b>	Horizontal: 180° Vertical: 180° Diagonal: 180°	<b>CPU</b>	Ambarella CV72S66

#### Standard video settings

<b>Compression</b>	H.265, H.264	<b>Historical Video Settings</b>	Adaptive quality <sup>1</sup>
<b>Frame Rate<sup>2</sup></b>	24fps	<b>WDR Technology</b>	120dB dynamic range, true WDR, dual exposure
<b>Live Streaming Settings</b>	High quality (HQ): Up to 4,500 Kbps (default) Standard quality (SQ): Up to 600 Kbps		

#### Standard audio settings

<b>Audio</b>	Supported	<b>Interface</b>	Built-in microphone
<b>Audio Capacity</b>	One-way audio		

#### Power and network

<b>Power Input<sup>3</sup></b>	With IR: IEEE 802.3at Type 2 PoE+ Extended temperature range: IEEE 802.3at Type 2 PoE+	<b>Connectivity</b>	RJ-45 cable connector for network/ PoE connection; 10 / 100 / 1000 Mbps
<b>Power Consumption<sup>3</sup></b>	With IR: 42.5 - 57.0V, 0.46 - 0.34A, 19.5W Without IR: 42.5 - 57.0V, 0.22 - 0.17A, 9.5W Extended temperature range: 42.5 - 57.0V, 0.58A - 0.44A, 24.8W	<b>RTSP</b>	RTSP 1.0 RFC 2326 Max concurrent streams: 2 Audio support: No

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>

2. Frame rate can be adjusted by support.

3. Extended temperature range includes operating temperatures below -8.5°C / 16.7°F and assumes IR will be enabled.



# CF83-E Tech Specs



## General

<b>Operating Temperature</b>	-40°C to 50°C / -40°F to 122°F	<b>LED Indicator</b>	System power, status indicator, and debug indicator
<b>Humidity</b>	0 to 90%	<b>Warranty</b>	10 Years
<b>Certifications</b>	FCC, ICES, IK10 impact rating, IP66/67 weather rating	<b>Included Accessories</b>	Screw packs, mount plate with leveler, cable sealing rubber for 6.5-7.5mm, conduit adapter, T10 security driver

## Mechanical

<b>Weight</b>	Camera: 1368g / 48.2oz Mount plate: 196g / 6.9oz	<b>Body</b>	Aluminum, plastic dome trim
<b>Dimensions</b>	Ø: 155mm / 6.1in, H: 76.2mm / 3.0in with mount plate Ø: 155mm / 6.1in, H: 69.2mm / 2.7in without mount plate		

## Dimensions

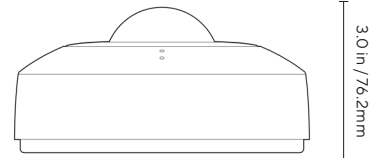

## Software capabilities

<b>Alerts</b>	Camera status, motion detection, people detection, vehicle detection, Person of Interest detection, crowd detection, AI-powered alerts	<b>Streaming and Storage</b>	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
<b>People Analytics</b>	People search, attribute search, face search, motion search, trajectory analysis <sup>4</sup> , selective face blurring, AI-powered search	<b>Sharing and Privacy</b>	Live links, privacy regions, audit log
<b>Vehicle Analytics</b>	Vehicle search, attribute search, motion search, trajectory analysis <sup>4</sup> , AI-powered search		

4. Trajectory analysis is supported in four-way split, panoramic, and ePTZ circle mode.



# Ordering Information

## CF83-E pricing

Model Number	MP <sup>1</sup>	WDR	Lens	IR Range	Onboard Storage	Maximum SQ Onboard Retention <sup>1</sup>	People/Vehicle Analytics	Cost (MSRP) <sup>USD</sup>
CF83-512E-HW	12.5MP	✓	Fixed	20m / 66ft	512GB	30 Days	✓	\$1,799
CF83-1TBE-HW	12.5MP	✓	Fixed	20m / 66ft	1TB	60 Days	✓	\$2,599
CF83-2TBE-HW	12.5MP	✓	Fixed	20m / 66ft	2TB	90 Days	✓	\$3,899
CF83-3TBE-HW	12.5MP	✓	Fixed	20m / 66ft	3TB	120 Days	✓	\$5,199

## Video Security Cloud License pricing

Model Number	Description	Cost (MSRP) <sup>USD</sup>
LIC-CAM-1Y	1-Year Camera License	\$199
LIC-CAM-3Y	3-Year Camera License	\$549
LIC-CAM-5Y	5-Year Camera License	\$899
LIC-CAM-10Y	10-Year Camera License	\$1,799

1. All our cameras record in "adaptive quality," capturing both standard and high quality streams. Standard quality (SQ) video is stored up to the amount of retention specified by the customer. The amount of high quality video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>



## Ordering Information

### Accessories pricing

Model Number	Description	Cost (MSRP) USD
ACC-MNT-ARM-1	Arm Mount	\$99
ACC-MNT-ANGLE-1	Angle Mount	\$149
ACC-MNT-PEND-1	Standard Pendant Cap	\$69
INJ-POE-PLUS	PoE Plus (802.3at) Injector, GigE	\$129
ACC-CAM-SHIELD-1	Camera Weather Shield	\$79
ACC-MNT-CLIP-1	Tile Clip Mount	\$99
ACC-MNT-UPEND-1	Umbrella Pendant Cap (Outdoor)	\$79
ACC-MNT-7	Angle Mount	\$149
ACC-MNT-8	Pendant Cap	\$69
ACC-MNT-POLE-1	Pole Mount	\$209
ACC-MNT-CORNER-1	Corner Mount	\$199
ACC-MNT-CJBOX-1	Circle Junction Box Mount	\$109

### Viewing Station pricing

VX52-HW	VX52 Viewing Station	\$499
LIC-VX-1Y	1-Year Viewing Station License	\$499
LIC-VX-3Y	3-Year Viewing Station License	\$1,299
LIC-VX-5Y	5-Year Viewing Station License	\$1,999
LIC-VX-10Y	10-Year Viewing Station License	\$3,999