


PIN OUT			
CN1		CN2	COLOR
1	—○—	1	WHITE/ORANGE
2	—○—	2	ORANGE
3	—○—	3	WHITE/GREEN
6	—○—	6	GREEN
4	—○—	4	BLUE
5	—○—	5	WHITE/BLUE
7	—○—	7	WHITE/BROWN
8	—○—	8	BROWN
SHIELD	————	SHIELD DRAIN WIRE	
		—○— > PAIR	

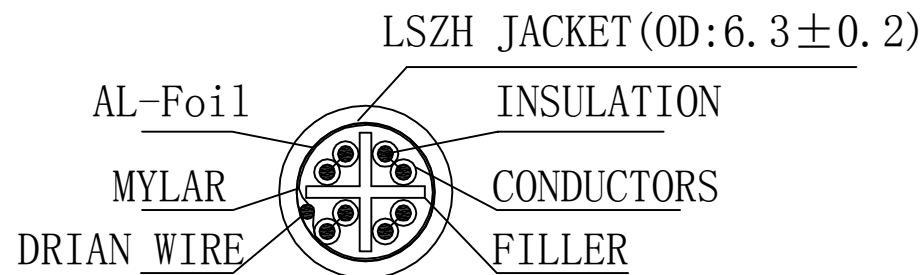

SECTION A-A

- 1.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 1.2 100% OPEN AND SHORT TEST.
- 1.3 ALL PRODUCTS PASS TIA CAT 6 CHANNEL TEST
- 1.4 TEMPERATURE RANGE:-20—+60℃

③	MOLDING	2PCS	GRAY PVC
②	CONNECTER	2PCS	RJ45 (8P8C) MALE WITH METAL SHIELD(NICKEL PLATED), GOLD PLATED PINS
①	CABLE	1PCS	26AWG*4P+FILLER+MYLAR+DRAIN WIRE+AL-FOIL +GRAY LSZH JACKET
NO.	PARTS NAME	Q' TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	STP-63
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

RJ45 (8P8C) M/M, FTP, CAT6 3m

