R180-F34
R180-F28

Dual LGA2011 sockets R3 motherboard for Intel® E5-2600 V3 series processors

Service Guide

Rev. 1.0

Copyright

© 2014 GIGA-BYTE TECHNOLOGY CO., LTD. All rights reserved.

The trademarks mentioned in this manual are legally registered to their respective owners.

Disclaimer

Information in this manual is protected by copyright laws and is the property of GIGABYTE. Changes to the specifications and features in this manual may be made by GIGABYTE without prior notice. No part of this manual may be reproduced, copied, translated, transmitted, or published in any form or by any means without GIGABYTE's prior written permission.

Documentation Classifications

In order to assist in the use of this product, GIGABYTE provides the following types of documentations:

- For detailed product information, carefully read the User's Manual.

For more information, visit our website at:

http://b2b.gigabyte.com

You are a professional?

Get an access to our complete source of sales, marketing & technical materials at:

http://reseller.b2b.gigabyte.com

https://www.facebook.com/gigabyteserver

Preface

Before using this information and the product it supports, please read the following general information.

1. This Service Guide provides you with all technical information relating to the BASIC CONFIGURATION decided for GIGABYTE's "global" product offering. To better fit local market-requirements and enhance product competitiveness, your regional office MAY have decided toextend the functionality of a machine (e.g. add-on card, modem, or extra memory capability).These LOCALIZED FEATURES will NOT be covered in this generic service guide. In suchcases, please contact your regional offices or the responsible personnel/channel to provide youwith further technical details.
2. Please note WHEN ORDERING SPARE PARTS, you should check the most up-to-date informationavailable on your regional web or channel. For whatever reason, if a part number change is made,it will not be noted in the printed Service Guide. For GIGABYTE-AUTHORIZED SERVICEPROVIDERS, your GIGABYTE office may have a DIFFERENT part number code to thosegiven in the FRU list of this printed Service Guide. You MUST use the list provided by yourregional GIGABYTE office to order FRU parts for repair and service of customer machines.

Table of Contents

Box Contents 7

Safety, Care and Regulatory Information 8

Chapter 1 Hardware Installation 11

1-1 Installation Precautions 11

1-2 Product Specifications 12

1-3 System Block Diagram 14

Chapter 2 System Hardware Installation 15

2-1 Removing Chassis Cover 16

2-2 Removing and Installing the Fan Duct 17

2-3 Installing the CPU 18

2-4 Installing the Heat Sink 19

2-5 Installing the Memory 20

2-5-1 Four Channel Memory Configuration 20

2-5-2 Installing a Memory 21

2-5-3 DIMM Population Table 21

2-6 Installing the PCI Expansion Card 22

2-6-1 Installing Add-on Card (Optional) 24

2-7 Installing the Hard Disk Drive 25

2-7-1 Hard Disk Drive Security Lock 26

2-8 Replacing the FAN Assemblly 27

2-9 Replacing the Power Supply 28

Chapter 3 System Appearance 29

3-1 Front View 29

3-2 Rear View 29

3-3 Front Panel LED and Buttons 30

3-4 Rear System LAN LEDs 32

3-5 Hard Disk Drive LEDs 33

3-6 Cable Routing 34

Chapter 4 Motherboard Components 35

4-1 MD90-FS0 Motherboard Components 35

4-2 Jumper Setting 38

Chapter 5 BIOS Setup 39

5-1 The Main Menu 41
5-2 Advanced Menu 44
5-2-1 Serial Port Console Redirection 45
5-2-2 PCI Subsystem Settings 48
5-2-2-1 PCI Express Settings 50
5-2-3 Network Stack 52
5-2-4 CSM Configuration 53
5-2-5 Post Report Configuration 55
5-2-6 Trusted Computing 56
5-2-7 USB Configuration 57
5-2-8 Chipset Configuration 58
5-9 SIO Configuration 59
5-2-10 iSCSI Configuration 61
5-3 Intel RC Setup Menu 62
5-3-1 Processor Configuration 63
5-3-1-1 Pre-Socket Configuration 66
5-3-2 Advanced Power Management Configuration 68
5-3-2-1 CPU P State Control 69
5-3-2-2 CPU C State Control 70
5-3-2-3 CPU T State Control 71
5-3-3 Common RefCode Configuration 72
5-3-4 QPI Configuration 73
5-3-5 Memory Configuration 75
5-3-5-1 Memory Topology 77
5-3-5-2 Memory Thermal 78
5-3-5-3 Memory Map 79
5-3-5-4 Memory RAS Configuration 80
5-3-6 IIO Configuration 81
5-3-6-1 IOAT Configuration 82
5-3-6-2 Intel VT for Directed I/O (VT-d) 83
5-3-7 PCH Configuration 84
5-3-7-1 PCH Devices 85
5-3-7-2 PCH sSATA Configuration 86
5-3-7-2-1 SATA Mode Options 89
5-3-7-3 PCH SATA Configuration 91
5-3-7-3-1 SATA Mode Options 94
5-3-7-4 USB Configuration 96
5-3-8 Miscellaneous Configuration 97
5-3-9 Server ME Configuration 98
5-3-10 Runtime Error Logging 99
5-3-10-1 Whea Setting 100
5-3-10-2 Memory Error Enabling 101

5-3-10-3 PCI/PCI Error Enabling 102
5-4 Server Management Menu 103
5-4-1 System Event Log 105
5-4-2 View FRU Information 106
5-4-3 BMC network configuration 107
5-5 Security Menu 108
5-5-1 Secure Boot menu 109
5-5-1-1 Key Management 110
5-6 Boot Menu 112
5-7 Save & Exit Menu 114
5-8 BIOS POST Codes 116
5-9 BIOS POST Beep code 120
5-9-1 PEI Beep Codes 120
5-9-2 DEX Beep Codes 120
5-10 BIOS Recovery Instruction 121

Box Contents

- ☑ R180-F34/R180-F28 System
- ☑ Driver CD
- ☑ Two CPU Heat Sink
- ☑ Rail Kit

- The box contents above are for reference only and the actual items shall depend on the product package you obtain. The box contents are subject to change without notice.
- The motherboard image is for reference only.

Safety, Care and Regulatory Information

Important safety information

Read and follow all instructions marked on the product and in the documentation before you operateyour system. Retain all safety and operating instructions for future use.

- The product should be operated only from the type of power source indicated on the rating label.* If your computer has a voltage selector switch, make sure that the switch is in the proper position foryour area. The voltage selector switch is set at the factory to the correct voltage.
- The plug-socket combination must be accessible at all times because it serves as the main disconnecting device.
- All product shipped with a three-wire electrical grounding-type plug only fits into a grounding-type poweroutlet. This is a safety feature. The equipment grounding should be in accordance with local and nationalelectrical codes. The equipment operates safely when it is used in accordance with its marked electricalratings and product usage instructions
- Do not use this product near water or a heat source.* Set up the product on a stable work surface or so as to ensure stability of the system.
- Openings in the case are provided for ventilation. Do not block or cover these openings. Make sure youprovide adequate space around the system for ventilation when you set up your work area. Never insertobjects of any kind into the ventilation openings.
- To avoid electrical shock, always unplug all power cables and modem cables from the wall outletsbefore removing covers.
- Allow the product to cool before removing covers or touching internal components.

Precaution for Product with Laser Devices

Observe the following precautions for laser devices:

- Do not open the CD-ROM drive, make adjustments, or perform procedures on a laser device other than those specified in the product's documentation.
- Only authorized service technicians should repair laser devices.

Precaution for Product with Modems, Telecommunications, ot Local AreaNetwork Options

Observe the following precautions for laser devices:

- Do not connect or use a modem or telephone during a lightning storm. There may be a risk of electricalshock from lightning.
- To reduce the risk of fire, use only No. 26 AWG or larger telecommunications line cord.
- Do not plug a modem or telephone cable into the network interface controller (NIC) receptacle.
- Disconnect the modem cable before opening a product enclosure, touching or installing internalcomponents, or touching an uninsulated modem cable or jack.
- Do not use a telephone line to report a gas leak while you are in the vicinity of the leak.

Federal Communications Commission (FCC) Statement

Warning

This is a class A product. In a domestic environment this product may cause radiointerferenceIn which case the user may be required to take adequate measures.

This equipment has been tested and found to comply with the limits for a Class A digital device,pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference when the equipment is operated in a commercial environment. This equipmentgenerates, uses, and can radiate radio frequency energy and, if not installed and used in accordance withthe instruction manual, may cause harmful interference to radio communications. Operation of thisequipment in a residential area is likely to cause harmful interference in which case the user will berequired to correct the interference at his own expense.Properly shielded and grounded cables and connectors must be used in order to meet FCC emissionlimits. Neither the provider nor the manufacturer are responsible for any radio or television interferencecaused by using other than recommended cables and connectors or by unauthorized changes ormodifications to this equipment. Unauthorized changes or modifications could void the user's authority tooperate the equipment.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Canadian Department of Communications Compliance Statement

This digital apparatus does not exceed the Class A limits for radio noise emissions from digitalapparatus as set out in the radio interference regulations of Industry Canada.Le present appareil numerique n'emet pas de bruits radioelectriques depassant les limites applicables auxappareils numeriques de Classe A prescrites dans le reglement sur le brouillage radioelectrique edicte parIndustrie Canada.

Class A equipment

This device has been tested and found to comply with the limits for a class A digital device pursuantPart 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference when the equipment is operated in a commercial environment. This equipmentgenerate, uses, and can radiate radio frequency energy, and if not installed and used in accordancewith the instructions, may cause harmful interference to radio communication. Operation of thisequipment in a residential area is likely to cause harmful interference, in which case the user will berequired to correct the interference at personal expence.

However, there is no guarantee that interference will not occur in a particular installation. If thisdevice does cause harmful interference to radio or television reception, which can be determined bytuning the device off and on, the user is encouraged to try to correct the interference by on or more ofthe following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the device and receiver
- Connect the device into an outlet on a circuit different from that to which the receiver isconnected'Consult the dealer or an experienced radio/television technician for help.

WEEE Symbol Statement

The symbol shown below is on the product or on its packaging, which indicates that this product must not be disposed of with other waste. Instead, the device should be taken to the waste collection centers for activation of the treatment, collection, recycling and disposal procedure. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local government office, your household waste disposal service or where you purchased the product for details of environmentally safe recycling.

- When your electrical or electronic equipment is no longer useful to you, "take it back" to your local or regional waste collection administration for recycling.
- If you need further assistance in recycling, reusing in your "end of life" product, you may contact us at the Customer Care number listed in your product's user's manual and we will be glad to help you with your effort.

Battery Warning: Incorrectly installing a battery or using incompatible battery may increase the risk of ifre explosion. Replace the battery only with the same or equivalent type.

- Do not disassemble, crush, punchture batteries.
- Do not store or place your battery pack next to or in a heat source such as a fire, heatgenerating appliance, can or exhaust vent. Heating battery cells to temperatures above 65°C (149°F) can cause explosion or fire.
- Do not attempt to open or service batteries. Do not dispose of batteries in a fire or with household waste.

Chapter 1 Hardware Installation

1-1 Installation Precautions

The motherboard/system contain numerous delicate electronic circuits and components which can become damaged as a result of electrostatic discharge (ESD). Prior to installation, carefully read the service guide and follow these procedures:

- Prior to installation, do not remove or break motherboard S/N (Serial Number) sticker or warranty sticker provided by your dealer. These stickers are required for warranty validation.
- Always remove the AC power by unplugging the power cord from the power outlet before installing or removing the motherboard or other hardware components.
- When connecting hardware components to the internal connectors on the motherboard, make sure they are connected tightly and securely.
- When handling the motherboard, avoid touching any metal leads or connectors.
- It is best to wear an electrostatic discharge (ESD) wrist strap when handling electronic components such as a motherboard, CPU or memory. If you do not have an ESD wrist strap, keep your hands dry and first touch a metal object to eliminate static electricity.
- Prior to installing the motherboard, please have it on top of an antistatic pad or within an electrostatic shielding container.
- Before unplugging the power supply cable from the motherboard, make sure the power supply has been turned off.
- Before turning on the power, make sure the power supply voltage has been set according to the local voltage standard.
- Before using the product, please verify that all cables and power connectors of your hardware components are connected.
- To prevent damage to the motherboard, do not allow screws to come in contact with the motherboard circuit or its components.
- Make sure there are no leftover screws or metal components placed on the motherboard or within the computer casing.
- Do not place the computer system on an uneven surface.
- Do not place the computer system in a high-temperature environment.
- Turning on the computer power during the installation process can lead to damage to system components as well as physical harm to the user.
- If you are uncertain about any installation steps or have a problem related to the use of the product, please consult a certified computer technician.

1-2 Product Specifications

CPU	◆ Support for Intel® Xeon® E5-2600 V3 series processors in the LGA2011 package ◆ L3 cache varies with CPU ◆ Supports Dual QuickPath Interconnect up to 9.6GT/s ◆ Enhanced Intel SpeedStep Technology (EIST) ◆ Support Intel Virtualization Technology (VT)
Chipset	◆ Intel® C612 Express (Wellsburg) Chipset
Memory	◆ 24 x 1.2V DDR4 DIMM sockets supporting up to 768GB RDIMM of system memory ◆ 24 x 1.2V DDR4 DIMM sockets supporting up to 1.5TB LRDIMM of system memory ◆ Four channel memory architecture ◆ Supports DDR4 2133MHz RDIMM memory modules ◆ Supports DDR4 2133MHz LR-DIMM memory modules ◆ Support for ECC RDIMM/LRDIMM memory modules
LAN	◆ Intel® I350 supports dual GbE LAN ports
Expansion Slot	◆ 2 x PCIe x16 slots (Gen3 x16 bus) ◆ 1 x PCIe x8 slot (Gen3 x8 bus) ◆ 1 x PCIe mezzanine type T (Gen3 x8 bus) slot
Onboard Graphics	◆ ASPEED® AST2400 supports 16MB DDR3 VRAM
Mass Storage	◆ 4 x 3.5" Hot-Swap HDDs (R180-F34) ◆ 8 x 2.5" Hot-Swap HDDs (R180-F28)
System Fans	◆ 4 x 40x40x28mm /18000rpm ◆ 4 x 40x40x56mm/23000rpm
USB	◆ 2 x USB 3.0 ports ◆ 2 x USB 2.0 ports
Internal Connectors	◆ 1 x 14-pin ATX main power connector ◆ 3 x 8-pin ATX power connectors ◆ 3 x 4-pin ATX 12V power connectors ◆ 2 x hot-plug power supply connectors ◆ 2 x Mini-SAS connectors (SATA3 6Gb/s signal) ◆ 2 x SATA3 6Gb/s connectors ◆ 2 x CPU fan headers ◆ 5 x System fan headers ◆ 1 x Front panel header ◆ 1 x HDD Back plane borad header ◆ 1 x TPM module connector ◆ 1 x Software RAID key connector ◆ 1 x IPMB connector

Rear Panel I/O	◆ 2 x USB 3.0 ports ◆ 2 x USB 2.0 ports ◆ RJ11 COM port ◆ 3 x RJ-45 ports (1 x 10/100/1000 dedicated management LAN port) ◆ 1 x VGA port ◆ 1 x ID button
Front Panel LED/Buttons	◆ 1 x Power button/LED ◆ 1 x NMI button ◆ 1 x ID Switch button/LED ◆ 1 x Reset button ◆ 2 x LAN LED ◆ 1 x System status LED ◆ 1 x HDD status LED
I/O Controller	◆ ASPEED® AST2400 BMC chip
Hardware Monitor	◆ System voltage detection ◆ CPU/System temperature detection ◆ CPU/System fan speed detection ◆ CPU/System fan speed control * Whether the CPU/system fan speed control function is supported will depend on the CPU/system cooler you install.
BIOS	◆ 1 x 128 Mbit flash ◆ AMI BIOS
Environment Ambient Temperature Relative Humidity	◆ Operating Temperature: 5°C to 35°C ◆ Non-operating Temperature: 0°C to 50°C ◆ 10-80% operating Humidity at 30°C
System Dimension	◆ 430Wx43Hx710D (mm)
Electrical Power Supply	◆ Hot-swap 800W 200-240VAC at 80 plus platinum ◆ Support redundancy function
* GIGABYTE reserves the right to make any changes to the product specifications and product-related information without prior notice.	

1-3 System Block Diagram

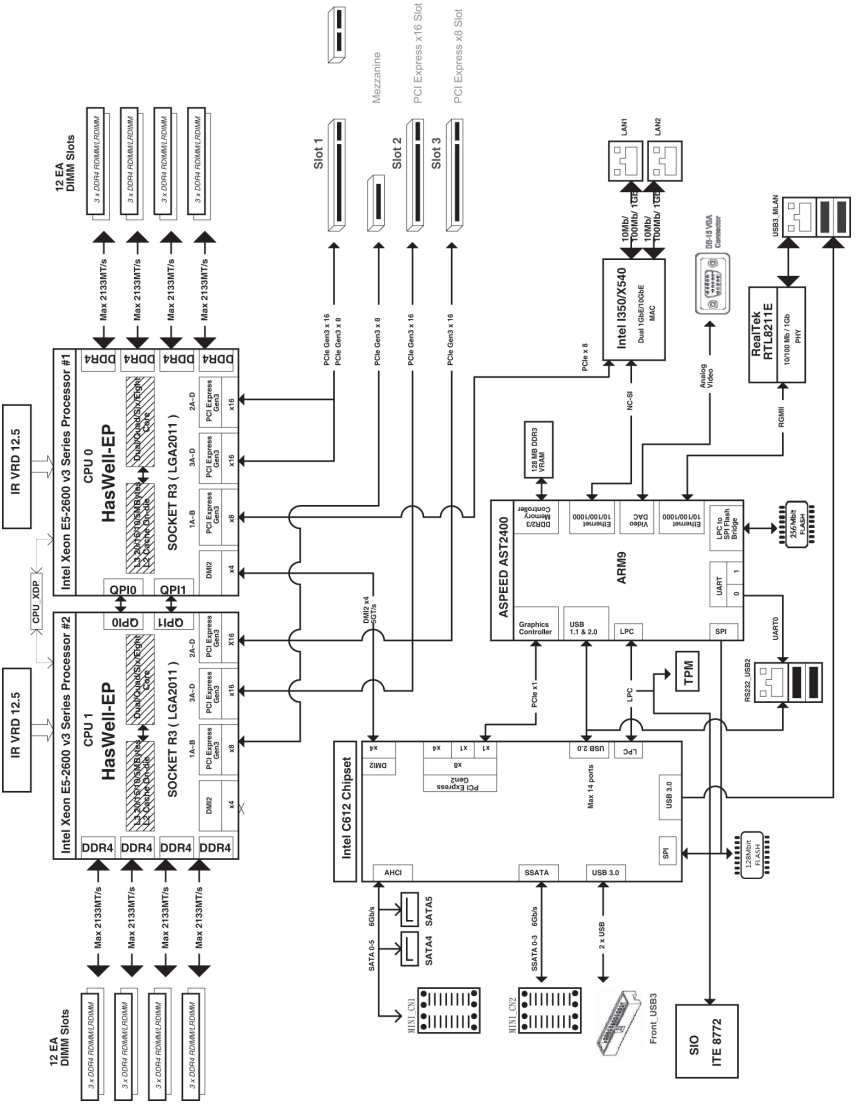

Chapter 2 System Hardware Installation

Pre-installation Instructions

Perform the steps below before you open the server or before you remove or replaceany component.

- Back up all important system and data files before performing any hardwareconfiguration.
- Turn off the system and all the peripherals connected to it.
- Locate the pin one of the CPU. The CPU cannot be inserted if oriented incorrectly. (Or you may locate the notches on both sides of the CPU and alignment keys on the CPU socket.)
- Apply an even and thin layer of thermal grease on the surface of the CPU.
- Do not turn on the computer if the CPU cooler is not installed, otherwise overheating and damage of the CPU may occur.
- Set the CPU host frequency in accordance with the CPU specifications. It is not recommended that the system bus frequency be set beyond hardware specifications since it does not meet the standard requirements for the peripherals. If you wish to set the frequency beyond the standard specifications, please do so according to your hardware specifications including the CPU, graphics card, memory, hard drive, etc.

2-1 Removing Chassis Cover

Before you remove or install the system cover

- Make sure the system is not turned on or connected to AC power.

Follow these instructions to remove the system cover:

1. Loosen and remove the screws securing the back cover.
2. Push down the indentation located at the side of the back chassis
3. Loosen and remove the thumbscrews.
4. Slide the cover horizontally to the back and remove the cover in the direction of the arrow.
5. Loosen and remove the screws securing the front top cover.
6. Remove the front top cover from the system.

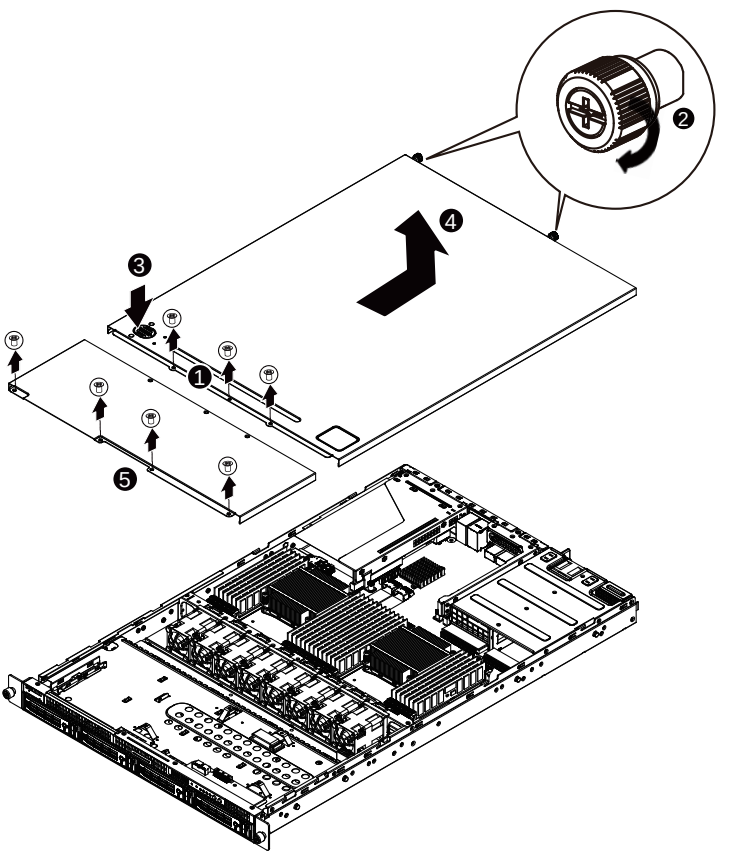

2-2 Removing and Installing the Fan Duct

Follow these instructions to remove/install the fan duct:

1. Lift up to remove the fan duct
2. To install the fan duct, align the fan duct with the guiding groove. Push down the fan duct into chassis until its firmly seats

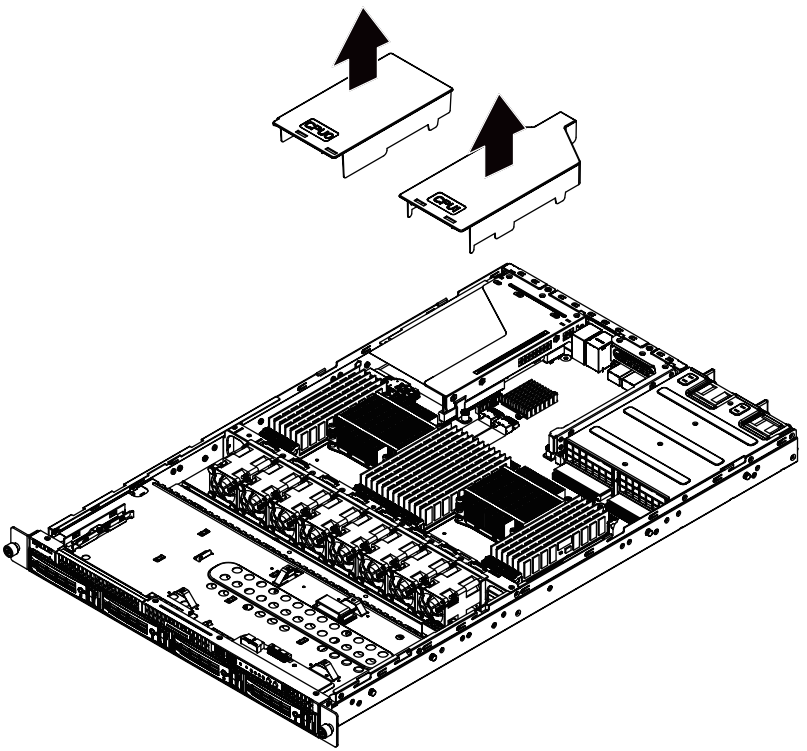

2-3 Installing the CPU

Read the following guidelines before you begin to install the CPU:

- Make sure that the motherboard supports the CPU.
- Always turn off the computer and unplug the power cord from the power outlet before installing the CPU to prevent hardware damage.
- Unplug all cables from the power outlets.
- Disconnect all telecommunication cables from their ports.
- Place the system unit on a flat and stable surface.
- Open the system according to the instructions.

WARNING!

Failure to properly turn off the server before you start installing components may cause serious damage. Do not attempt the procedures described in the following sections unless you are a qualified service technician.

Follow these instructions to install the CPU:

1. Raise the metal locking lever on the socket.
2. Remove the plastic covering on the CPU socket.Insert the CPU with the correct orientation. The CPU only fits in one orientation.
3. Replace the metal cover.
4. Push the metal lever back into locked position.

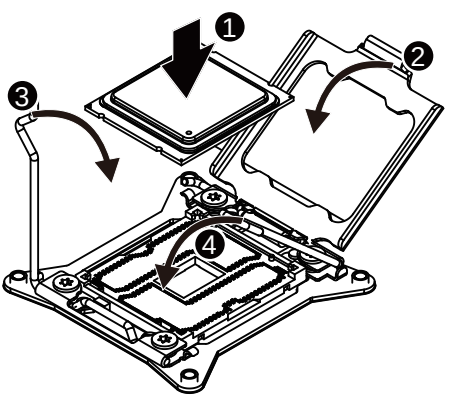

2-4 Installing the Heat Sink

Follow these instructions to install the heat sinks:

1. Apply thermal compound evenly on the top of the CPU. Remove the protective cover from the underside of the heat sink.
2. Place the heat sink(s) on top of the CPU.
3. Tighten the four positioning screws.

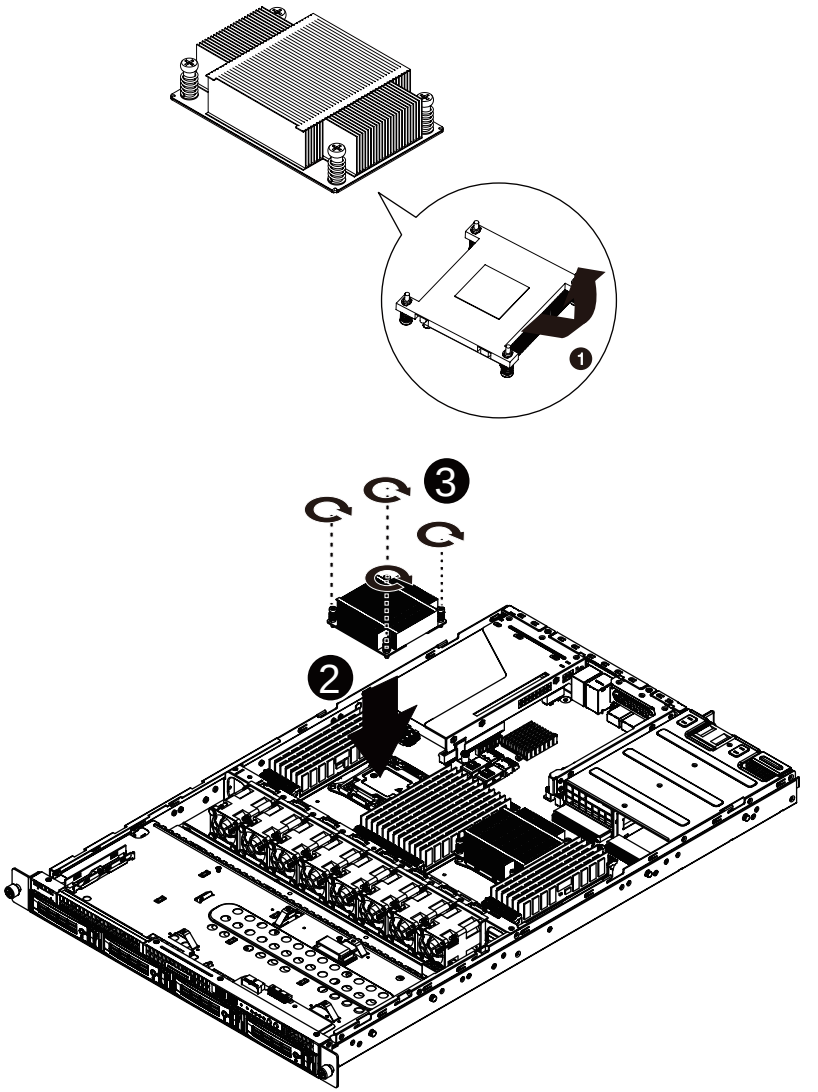

2-5 Installing the Memory

Read the following guidelines before you begin to install the memory:

- Make sure that the motherboard supports the memory. It is recommended that memory of the same capacity, brand, speed, and chips be used.
- Always turn off the computer and unplug the power cord from the power outlet before installing the memory to prevent hardware damage.
- Memory modules have a foolproof design. A memory module can be installed in only one direction. If you are unable to insert the memory, switch the direction.

2-5-1 Four Channel Memory Configuration

This motherboard provides 24 DDR4 memory sockets and supports Four Channel Technology. After the memory is installed, the BIOS will automatically detect the specifications and capacity of the memory. Enabling Four Channel memory mode will be four times of the original memory bandwidth.

The four DDR4 memory sockets are divided into four channels each channel has two memory sockets as following:

Channel 1: DIMM_P0_A0/DIMM_P0_A1/DIMM_P0_A2 (For pimary CPU);
DIMM_P1_E0/DIMM_P1_E1/DIMM_P1_E2 (For secondary CPU)

Channel 2: DIMM_P0_B0/DIMM_P0_B1/DIMM_P0_B2 (For pimary CPU);
DIMM_P1_F0/DIMM_P1_F1/DIMM_P1_F (For secondary CPU)

Channel 3: DIMM_P0_C0/DIMM_P0_C1/DIMM_P0_C2 (For pimary CPU);
DIMM_P1_G0/DIMM_P1_G1/DIMM_P1_G2 (For secondary CPU)

Channel 4: DIMM_P0_D0/DIMM_P0_D1/DIMM_P0_D2 (For pimary CPU);
DIMM_P1_H0/DIMM_P1_H1/DIMM_P1_H2 (For secondary CPU)

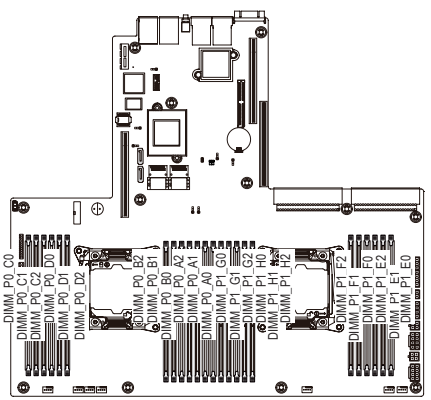

2-5-2 Installing a Memory

Before installing a memory module, make sure to turn off the computer and unplug the power cord from the power outlet to prevent damage to the memory module.
Be sure to install DDR4 DIMMs on this motherboard.

Follow these instructions to install the Memory:

1. Insert the DIMM memory module vertically into the DIMM slot, and push it down.
2. Close the plastic clip at both edges of the DIMM slots to lock the DIMM module.
3. Reverse the installation steps when you want to remove the DIMM module.

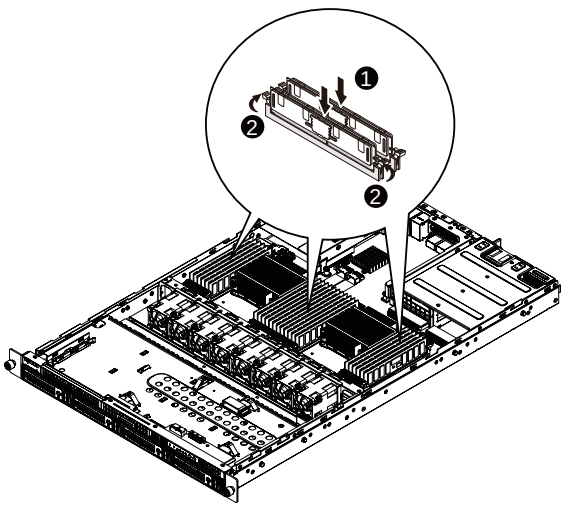

2-5-3 DIMM Population Table

Type	Ranks Per DIMM and Data Width	Speed (MT/s); Slot Per Channel (SPC) and DIMM Per Channel (DPC)		
		1 Slot Per Channel	2 Slot Per Channel	
		1DPC	1DPC	2DPC
RDIMM	SRx4	2133	2133	1866
RDIMM	SRx8	2133	2133	1866
RDIMM	DRx8	2133	2133	1866
RDIMM	DRx4	2133	2133	1866
LRDIMM	QRx4	2133	2133	2133

When only one DIMM is used, it must be populated in memory slot0 first.
Memory populated sequence must be followed with slot0/slot1/slot2.
System will not boot normally with incorrect populated sequence.

2-6 Installing the PCI Expansion Card

- Voltages can be present within the server whenever an AC power source is connected. This voltage is present even when the main power switch is in the off position. Ensure that the system is powered-down and all power sources have been disconnected from the server prior to installing a PCI card.

Failure to observe these warnings could result in personal injury or damage to equipment.

- The PCI riser assembly does not include a riser card or any cabling as standard. To install a PCI card, a riser card must be installed.

Follow these instructions to PCI Expansion card:

1. Remove the securing screw on the riser bracket.
2. Remove the securing special screw on the riser bracket.
3. Lift up the riser bracket out of system.
4. Loosen and remove the bracket securing screw.
5. Orient the PCI-E card with the riser guide slot and push in the direction of the arrow until the PCI-E card sits in the PCI card connector.
6. Secure the PCI-E card with the screw.
7. Reverse the previous steps to install the riser bracket.

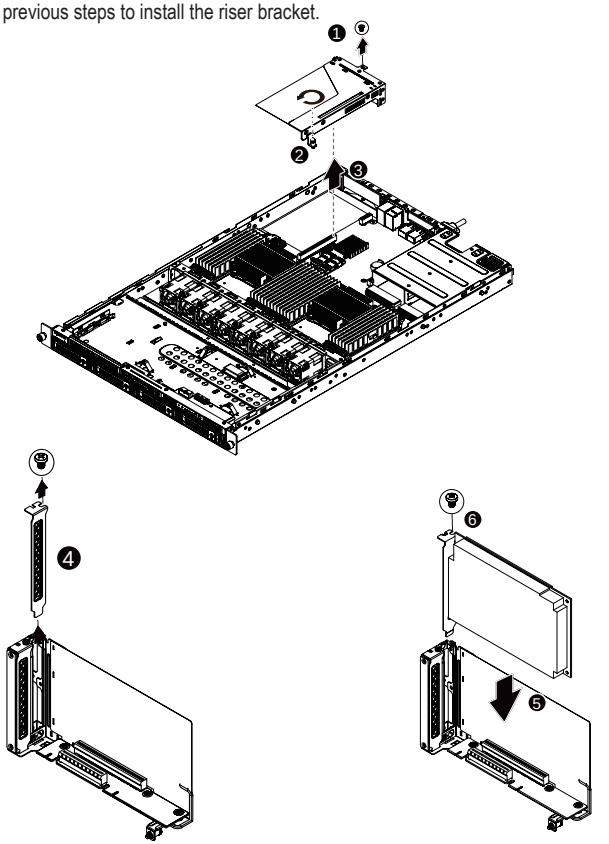

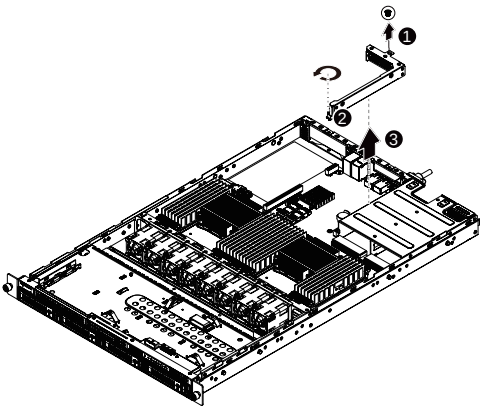
1
2
3

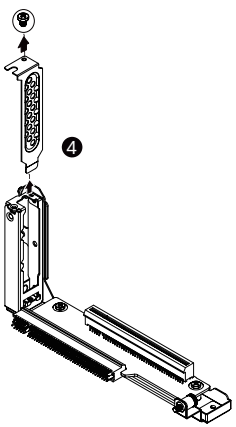
4

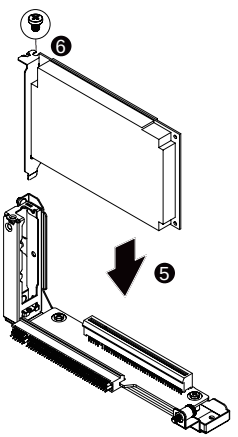
6
5

2-6-1 Installing Add-on Card (Optional)

Follow these instructions to install Add-on card:

1. Remove theriser bracket from the system following the steps outlined in **2-6 Installing the PCI Expansion Card**.
2. Remove the PCI bracket and mini PCI card.
3. Insert the dedicated rear bracket and secure with screw.
4. Engage the support bracket with mezzaine card and secure with screws.
5. Attach the interposer card to the selected slot (PCIE_4).
6. Insert the add-on card into the interposer card. Make sure that the card is properly seated.
7. Tighten the thumbscrew.

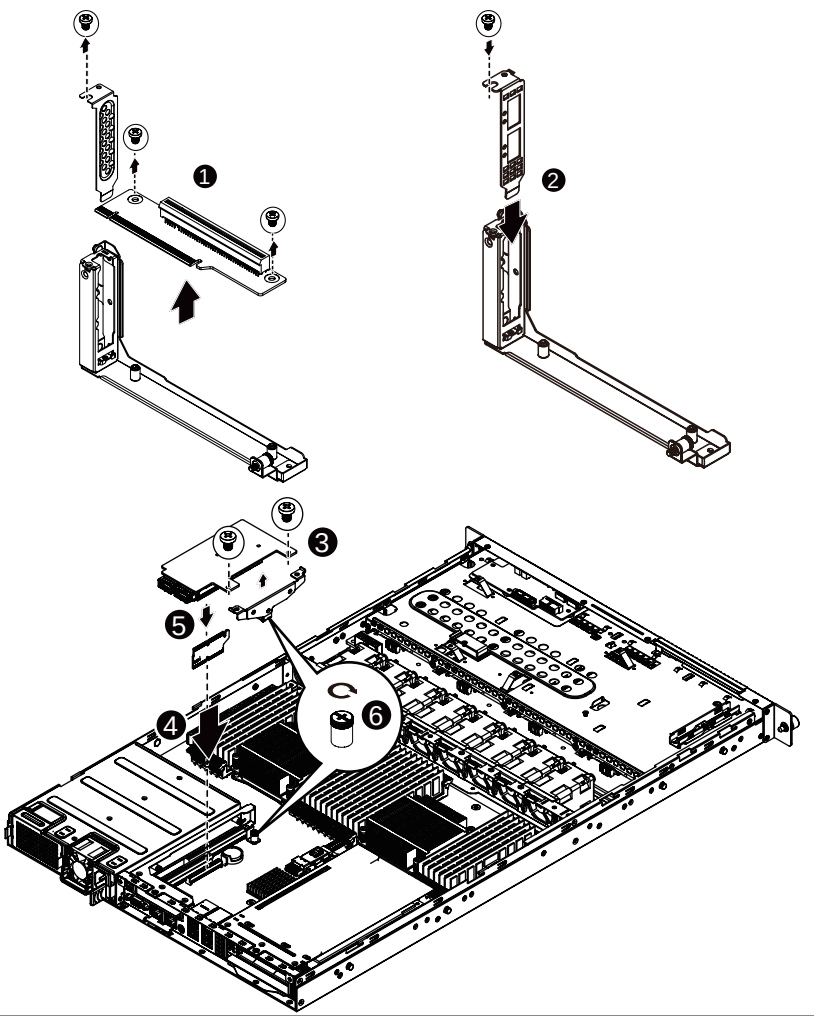

2-7 Installing the Hard Disk Drive

Read the following guidelines before you begin to install the Hard disk drive:

- Take note of the drive tray orientation before sliding it out.
- The tray will not fit back into the bay if inserted incorrectly.
- Make sure that the HDD is connected to the HDD connector on the backplane.

Follow these instructions to install the Hard disk drive:

1. Press the release button.
2. Pull the locking lever to remove the HDD tray. Remove the HDD dummy cover.
3. Slide hard disk into blank.
4. Secure the hard drive to the tray with four (4) screws as shown. Do not over tighten thescrews.
5. Slide the blank into the bay until it locks into place.

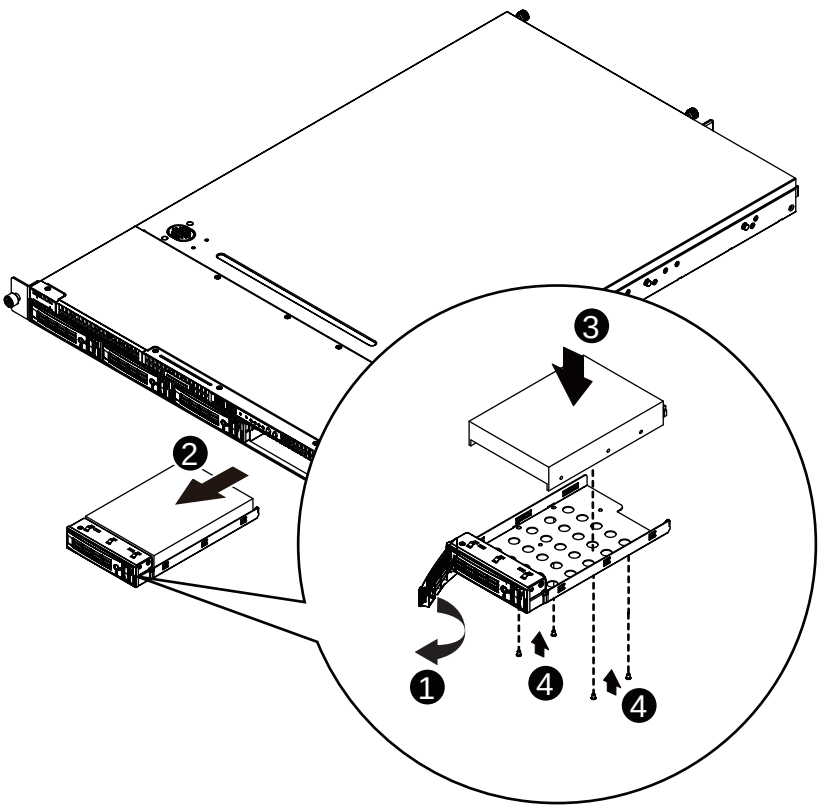

2-7-1 Hard Disk Drive Security Lock

The HDD bays incorporate a security screw to prevent accidental HDD release.To engage the lock, turn the security screw clock-wise toward the Lock symbol. To disengage the lock,turn the security screw counter clock-wise toward the Unlock symbol as shown.

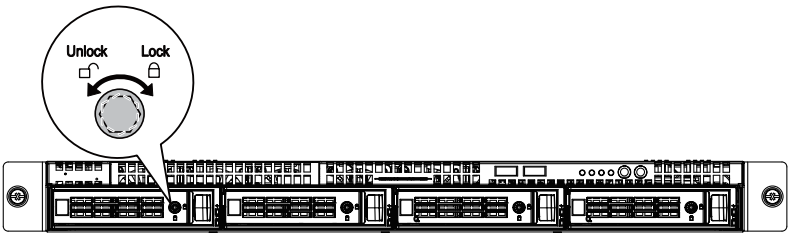

2-8 Replacing the FAN Assemblly

Follow these instructions to replace the fan assembly:

1. Remove the fan duct from the system following the steps outlined in **2-2 Removing and Installing the Fan Duct**.
2. Remove the fan assemble pulling the rear edge in the direction of the arrow.
3. Lift up the fan assembly from the chassis.
4. Reverse the previous steps to install the replacement fan assembly.

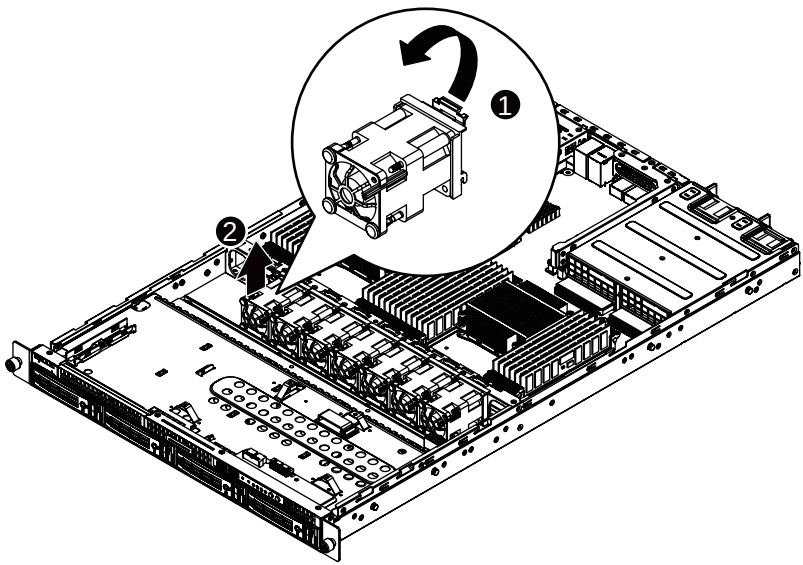

2-9 Replacing the Power Supply

Follow these instructions to replace the power supply:

1. Disconnect the three power cables.
2. Remove the four screws securing on the power supply.
3. Lift the power supply out of the chassis in the direction of the arrow.
4. Insert the replacement power supply firmly into the chassis. Connect the AC power cord to the replacement power supply.

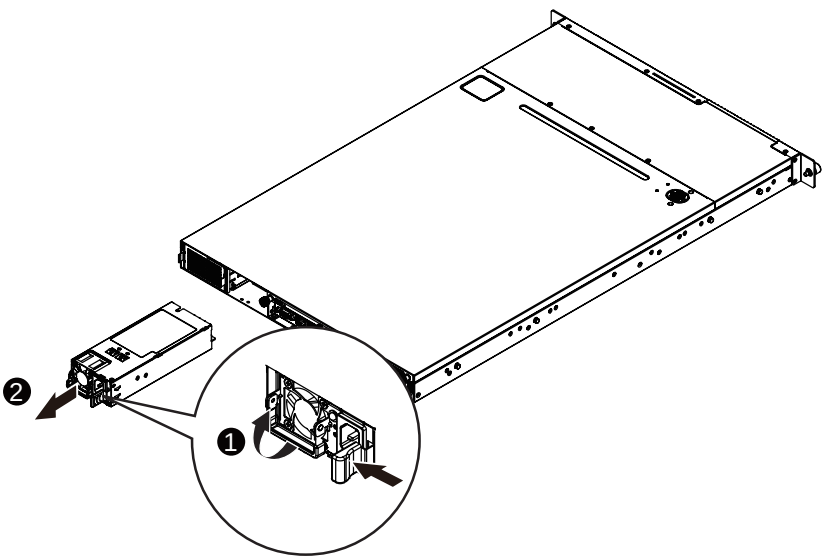

Chapter 3 System Appearance

3-1 Front View

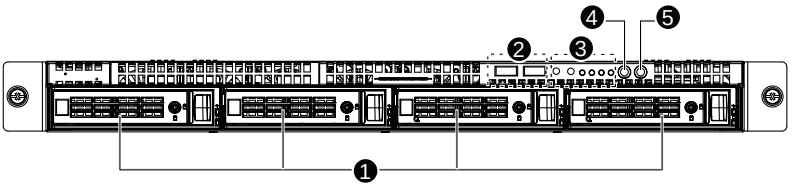

No.	Decription
1.	HDD bays
2.	Front USB 3.0 ports
3.	Front Panel LEDs and buttons
4.	ID button and LED
5.	Power button and LED

3-2 Rear View

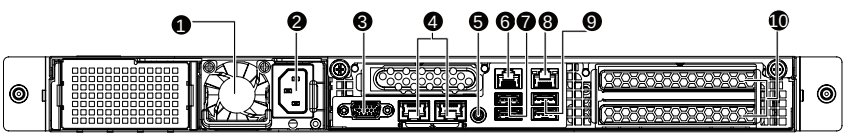

No.	Decription
1.	Power supply fan
2.	Power supply module cord socket
3.	VGA port
4.	RJ-45 LAN ports
5.	ID switch button
6.	RJ-11 COMport
7.	USB 2.0 ports
8.	10/100/1000 Server management LAN port
9.	USB 3.0 ports
10.	Low-profile riser card bay

- Please Go to Chapter **3-3 Front Panel LED** and Buttons for detail description of function LEDs.

3-3 Front Panel LED and Buttons

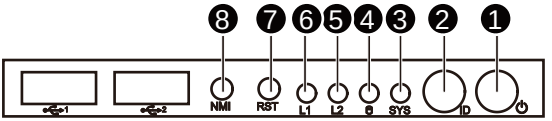

No.	Name	Color	Status	Critical Event	Description
1.	Power button and LED	Green	Solid On	N/A	System is powered on
		Green	Blink	N/A	System is in ACPI S1 state (sleep mode)
		N/A	Off	N/A	• System is not powered on or in ACPI S5 state (power off) • System is in ACPI S4 state (hibernate mode)
2.	ID Button and LED	Blue	Solid On	N/A	System identification is active.
		N/A	Off	N/A	System identification is disabled.
3.	System Status LED	Green	Solid On	N/A	System is operating normally.
			Blink	N/A	Degrade condition, may indicates the following: • CPU failure • DIMM killed
		Amber	Solid On	Yes	Critical condition, may indicates the following: • Power module failure • System fan failure • Power supply voltage issue • System temperature/voltage issue
			Blink	N/A	Non-critical condition, may indicates the following: • Redundant power module failure • Temperature and voltage issue • Chassis intrusion
		N/A	Off	N/A	System is not ready. May indicate the following: • POST error • NMI error • Processor or terminator missing

4.	HDD Status LED	Green	On	N/A	HDD locate
			Blink	N/A	HDD access
		Amber	On	N/A	HDD fault
		Green/ Amber	Blink	N/A	HDD rebuilding
		N/A	Off	N/A	• No HDD access • No HDD fault
5.	LA2 Active/ Link LED	Green	Solid On	N/A	Link between system and network or no access
		Green	Blink	N/A	Data transmission or receiving is occurring
		N/A	Off	N/A	No data transmission or receiving is occurring
6.	LAN1 Active/ Link LED	Green	Solid On	N/A	Link between system and network or no access
		Green	Blink	N/A	Data transmission or receiving is occurring
		N/A	Off	N/A	No data transmission or receiving is occurring
7.	Reset Button				Press the button to reset the system.
8.	NMI button				Press the button server generates a NMI to the processor if the multiple-bit ECC errors occur, which effectively halt the server.

3-4 Rear System LAN LEDs

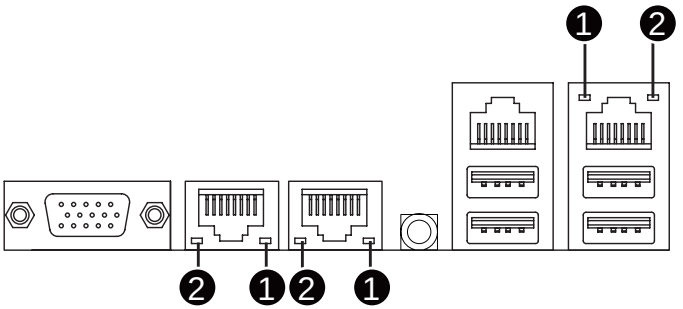

No.	Name	Color	Status	Description
1.	1GbE Speed LED	Yellow	On	1 Gbps data rate
		Green	On	100 Mbps data rate
		N/A	Off	10 Mbps data rate
2.	1GbE Link/ Activity LED	Green	On	Link between system and network or no access
			Blink	Data transmission or receiving is occurring
		N/A	Off	No data transmission or receiving is occurring

3-5 Hard Disk Drive LEDs



No	Description	Multi Color LEDs	
		LED Active Green	LED Active Amber
1	HDD Access	Blink	Off
	HDD Locate	On	Off
	HDD Failure	Off	On
	HDD connected and rebuilding data	Blink	Blink (Alternative)
2	Reserve		

3-6 Cable Routing

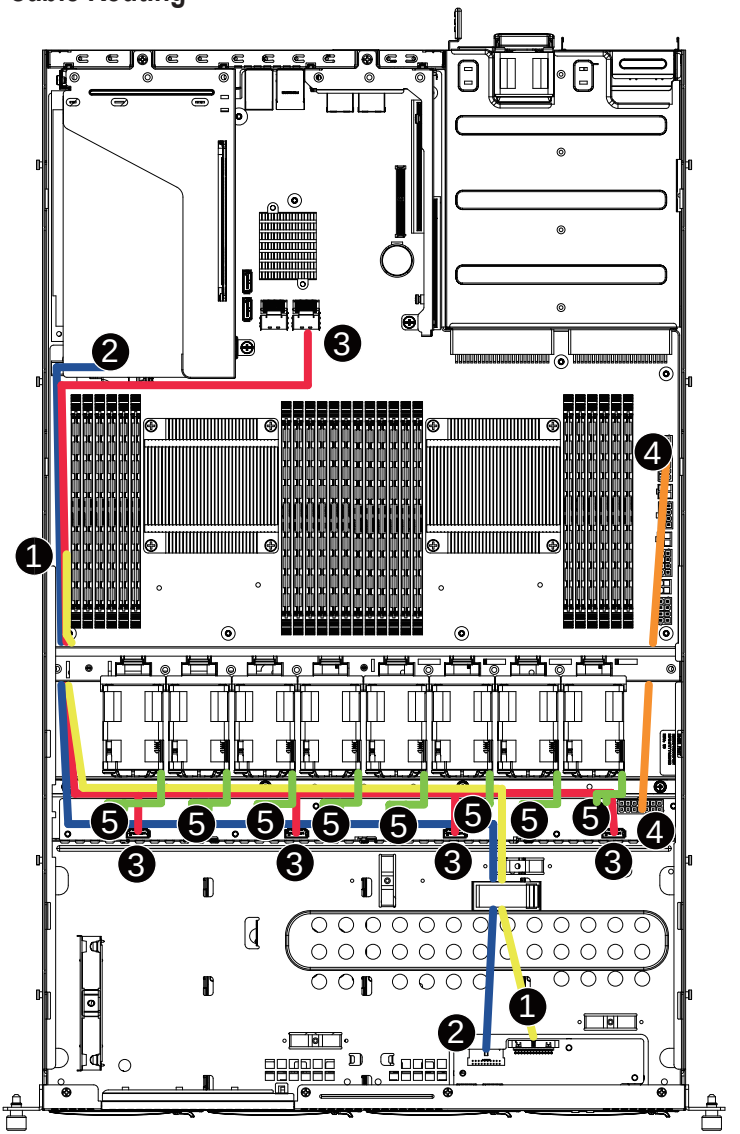

No.	Suggest Cable	No.	Suggest Cable
1.	Front switch cable/Front LED cable	2.	Front panel USB 3.0 cable
3.	Mini SAS cable	4.	HDD back plane board power cable
5.	System fan power cable	6.	System fan power cable

Chapter 4 Motherboard Components

4-1 MD90-FS0 Motherboard Components

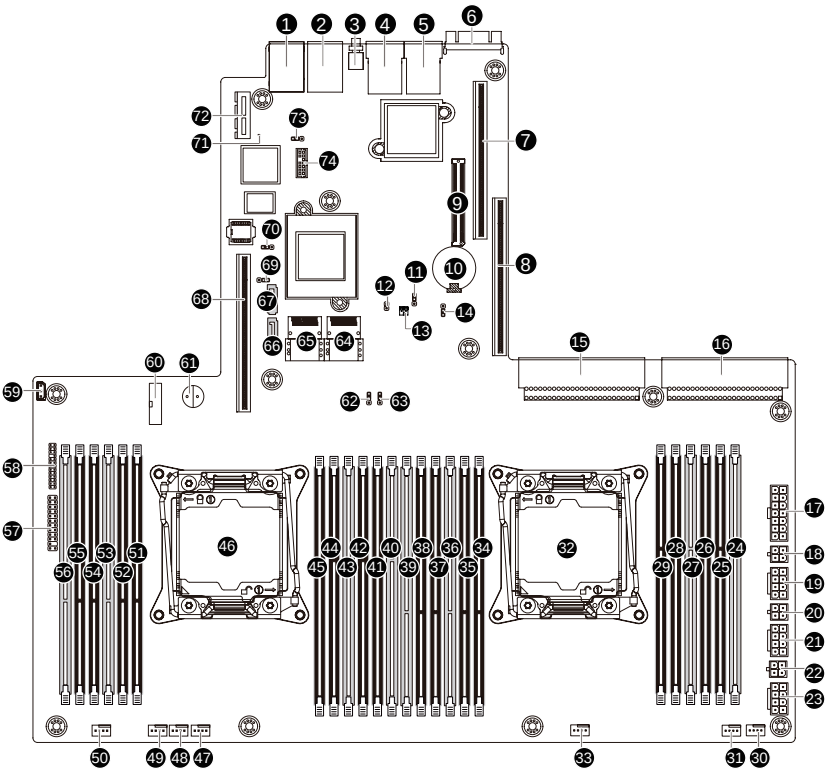

Item	Code	Description
1	USB3_MLAN	BMC Management LAN port (top) / USB 3.0 ports (bottom)
2	COM1_USB2	RJ11 COM port (top) / USB 2.0 ports (bottom)/
3	SW_ID	ID switch button
4	LAN1	LAN1 port
5	LAN2	LAN2 port
6	VGA	VGA port
7	RISER_SLOT3	PCI Express x16 slot
8	RISER_SLOT2	PCI Express x16
9	PCIE_4	PCI Express x16 slot (Proprietary slot)
10	BAT	Battery socket
11	S3_MASK	S3 Power On Select jumper
12	CASE_OPEN	Case open intrusion alert header

13	SW_RAID	Intel/LSI Software RAID Key jumper
14	CLR_CMOS	Clear CMOS jumper
15	PSU1	Hot-plug PSU module connector#1
16	PSU2	Hot-plug PSU module connector#1
17	ATX1	14 pin main power connector
18	12V_GPU3_2	4 pin 12V power connector
19	12V_GPU3_1	8 pin power connector
20	12V_GPU2_2	4 pin 12V power connector
21	12V_GPU2_1	8 pin power connector
22	12V_GPU1_2	4 pin 12V power connector
23	12V_GPU1_1	8 pin power connector
24	DIMM_P1_E0	Channel 1 slot 0 (for secondary CPU)
25	DIMM_P1_E1	Channel 1 slot 1 (for secondary CPU)
26	DIMM_P1_E2	Channel 1 slot 2 (for secondary CPU)
27	DIMM_P1_F0	Channel 2 slot 0 (for secondary CPU)
28	DIMM_P1_F1	Channel 2 slot 1 (for secondary CPU)
29	DIMM_P1_F2	Channel 2 slot 2 (for secondary CPU)
30	SYS_FAN5	System fan connector#5
31	SYS_FAN4	System fan connector#4
32	CPU1	Intel LGA2011 Socket R3 (Secondary CPU)
33	CPU1_FAN	CPU1 fan connector (for Secondary CPU)
34	DIMM_P1_H2	Channel 3 slot 2 (for secondary CPU)
35	DIMM_P1_H1	Channel 3 slot 1 (for secondary CPU)
36	DIMM_P1_H0	Channel 3 slot 0 (for secondary CPU)
37	DIMM_P1_G2	Channel 4 slot 2 (for secondary CPU)
38	DIMM_P1_G1	Channel 4 slot 1 (for secondary CPU)
39	DIMM_P1_G0	Channel 4 slot 0 (for secondary CPU)
40	DIMM_P0_A0	Channel 4 slot 0 (for primary CPU)
41	DIMM_P0_A1	Channel 1 slot 1 (for primary CPU)
42	DIMM_P0_A2	Channel 1 slot 2 (for primary CPU)
43	DIMM_P0_B0	Channel 2 slot 0 (for primary CPU)
44	DIMM_P0_B1	Channel 2 slot 1 (for primary CPU)
45	DIMM_P0_B2	Channel 2 slot 2 (for primary CPU)
46	CPU0	Intel LGA2011 Socket R3 (Primary CPU)
47	CPU0_FAN	CPU0 fan connector (for Primary CPU)
48	SYS_FAN3	System fan connector#3
49	SYS_FAN2	System fan connector#2
50	SYS_FAN1	System fan connector#1
51	DIMM_P0_D2	Channel 4 slot 2 (for primary CPU)
52	DIMM_P0_D1	Channel 4 slot 1 (for primary CPU)
53	DIMM_P0_D0	Channel 4 slot 0 (for primary CPU)
54	DIMM_P0_C2	Channel 3 slot 2 (for primary CPU)
55	DIMM_P0_C1	Channel 3 slot 1 (for primary CPU)
56	DIMM_P0_C0	Channel 3 slot 0 (for primary CPU)

57	FP_1	Front panel header
58	BP_1	HDD back plane board header
59	IPMB	IPMB connector
60	F_USB3	USB 3.0 header
61	BUZZER1	Buzzer
62	PCH_ME	ME recovery jumper
63	ME_UPDATE	ME update jumper
64	MINI_CN1	Mini-SAS cable connector#1 supports SATA3 6Gb/s
65	MINI_CN2	Mini-SAS cable connector#2 supports SATA3 6Gb/s
66	SATA5	SATA3 6Gb/s connector
67	SATA4	SATA3 6Gb/s connector
68	RISER_1_2	PCI Express x16 slot (Gigabyte extension slot)
69	BIOS_PWD	Clearing Supervisor Password jumper
70	BIOS_RCVR	BIOS recovery jumper
71	LED_BMC	BMC firmware readiness LED
72	RISER_1_1	PCI Express x4 slot (Gigabyte extension slot)
73	BMC_FRB	Force to Stop FRB Timer jumper
74	TPM	TPM module connector

4-2 Jumper Setting

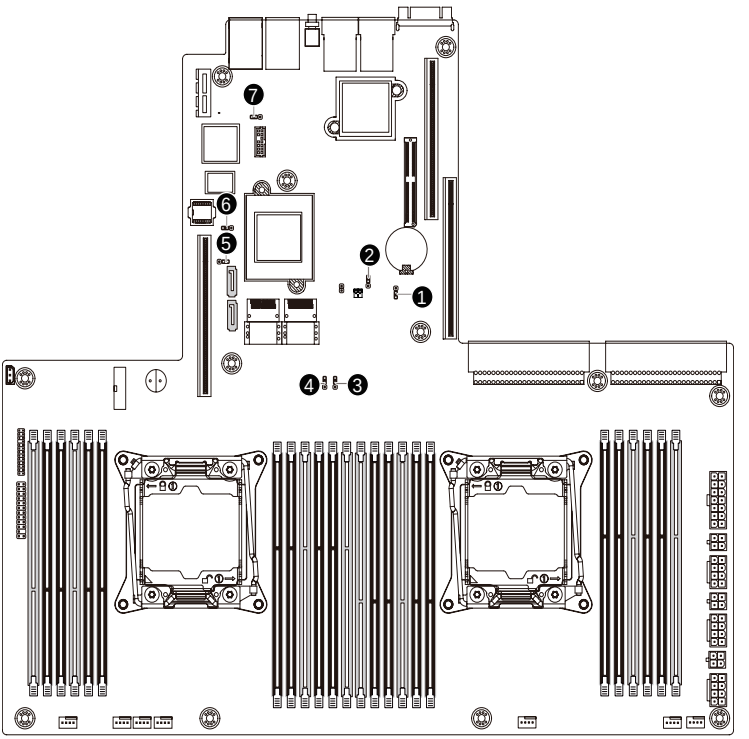

No.	Jumper Code	Jumper Setting
1.	CLR_CMOS (Clearing CMOS Jumper)	1-2 Close: Normal operation (Default setting)
		2-3 Close: Clear CMOS data
2.	S3_MASK (S3 Power On Select Jumper)	1-2 Close: Stop an initial power on when BMC is not ready.
		2-3 Close: Keep initial power on. (Default setting)
3.	ME_UPDATE (ME Update Jumper)	1-2 Close: Normal operation (Default setting)
		2-3 Close: ME recovery mode.
4.	PCH_ME (ME Recovery Jumper)	1-2 Close: Normal operation (Default setting)
		2-3 Close: ME recovery mode.
5.	BIOS_PWD (Clearing Supervisor Password Jumper)	1-2 Close: Normal operation. (Default setting)
		2-3 Close: Skip supervisor password.
6.	BIOS_RCVR (BIOS Recovery Jumper)	1-2 Close: Normal operation (Default setting)
		2-3 Close: BIOS recovery mode.
7.	BMC_FRB (Force to Stop FRB Timer Jumper)	1-2 Close: Normal operation (Default setting)
		2-3 Close: Force to Stop FRB Timer

Chapter 5 BIOS Setup

BIOS (Basic Input and Output System) records hardware parameters of the system in the EFI on the motherboard. Its major functions include conducting the Power-On Self-Test (POST) during system startup, saving system parameters and loading operating system, etc. BIOS includes a BIOS Setup program that allows the user to modify basic system configuration settings or to activate certain system features. When the power is turned off, the battery on the motherboard supplies the necessary power to the CMOS to keep the configuration values in the CMOS.

To access the BIOS Setup program, press the <F2> key during the POST when the power is turned on.

- BIOS flashing is potentially risky, if you do not encounter problems of using the current BIOS version, it is recommended that you don't flash the BIOS. To flash the BIOS, do it with caution. Inadequate BIOS flashing may result in system malfunction.
- It is recommended that you not alter the default settings (unless you need to) to prevent system instability or other unexpected results. Inadequately altering the settings may result in system's failure to boot. If this occurs, try to clear the CMOS values and reset the board to default values. (Refer to the **Exit** section in this chapter or introductions of the battery/clearing CMOS jumper in Chapter 1 for how to clear the CMOS values.)

BIOS Setup Program Function Keys

<←><→>	Move the selection bar to select the screen
<↑><↓>	Move the selection bar to select an item
<+>	Increase the numeric value or make changes
<->	Decrease the numeric value or make changes
<Enter>	Execute command or enter the submenu
<Esc>	Main Menu: Exit the BIOS Setup program Submenus: Exit current submenu
<F1>	Show descriptions of general help
<F3>	Restore the previous BIOS settings for the current submenus
<F9>	Load the Optimized BIOS default settings for the current submenus
<F10>	Save all the changes and exit the BIOS Setup program

- **Main**
  This setup page includes all the items in standard compatible BIOS.
- **Advanced**
  This setup page includes all the items of AMI BIOS special enhanced features.
  (ex: Auto detect fan and temperature status, automatically configure hard disk parameters.)
- **Intel RC Setup**
  This setup page includes all the submenu options for configuring the function of processor, network, North Bridge, South Bridge, and System event logs.
- **Server Management**
  Server additional features enabled/disabled setup menus.
- **Security**
  Change, set, or disable supervisor and user password. Configuration supervisor password allows you to restrict access to the system and BIOS Setup.
  A supervisor password allows you to make changes in BIOS Setup.
  A user password only allows you to view the BIOS settings but not to make changes.
- **Boot**
  This setup page provides items for configuration of boot sequence.
- **Exit**
  Save all the changes made in the BIOS Setup program to the CMOS and exit BIOS Setup. (Pressing <F10> can also carry out this task.)
  Abandon all changes and the previous settings remain in effect. Pressing <Y> to the confirmation message will exit BIOS Setup. (Pressing <Esc> can also carry out this task.)

5-1 The Main Menu

Once you enter the BIOS Setup program, the Main Menu (as shown below) appears on the screen. Use arrow keys to move among the items and press <Enter> to accept or enter other sub-menu.

Main Menu Help

The on-screen description of a highlighted setup option is displayed on the bottom line of the Main Menu.

Submenu Help

While in a submenu, press <F1> to display a help screen (General Help) of function keys available for the menu. Press <Esc> to exit the help screen. Help for each item is in the Item Help block on the right side of the submenu.

- When the system is not stable as usual, select the **Restore Defaults** item to set your system to its defaults.
- The BIOS Setup menus described in this chapter are for reference only and may differ by BIOS version.

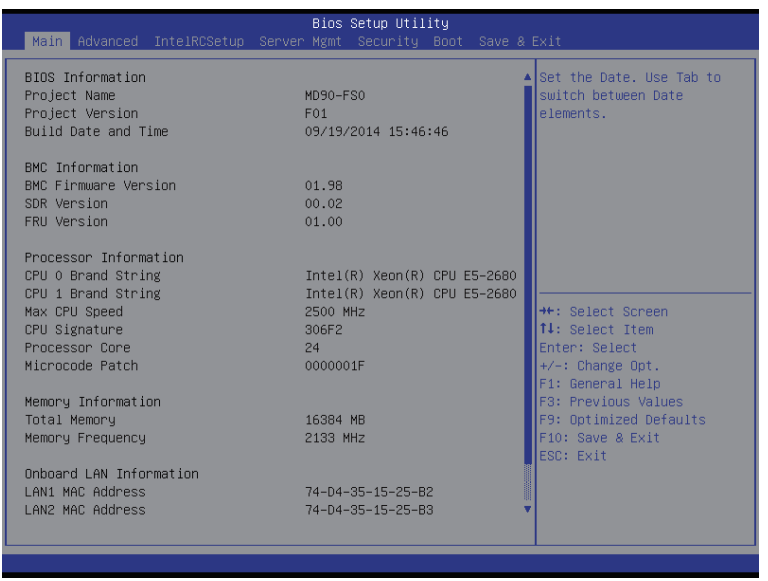

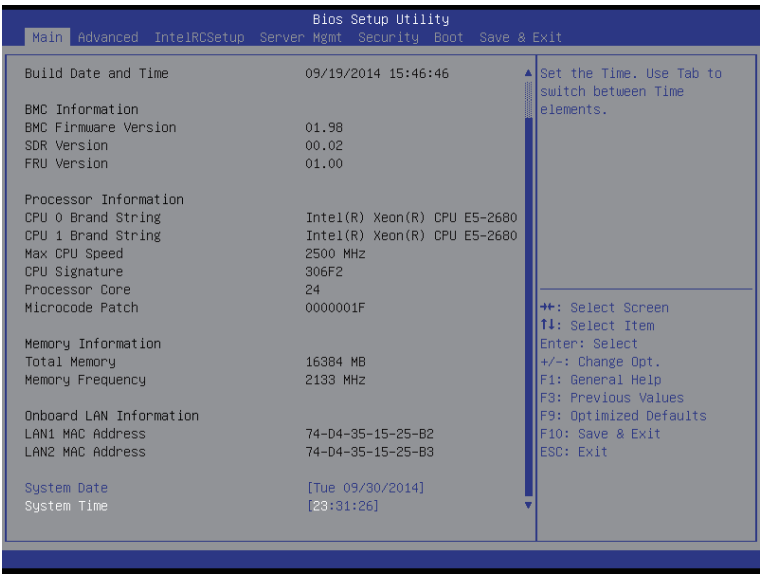

- **BIOS Information**
- **Porject Name**

  Display the project name information.
- **Porject Version**

  Display version number of the BIOS setup utility.
- **BIOS Build Date and Time**

  Displays the date and time when the BIOS setup utility was created.
- **BMC Information**
- **BMC Firmware Version**

  Display BMC firmware version information.
- **SDR Version**

  Display the SDR version information.
- **FRU Version**

  Display the FRU version information.
- **Processor Information**
- **CPU Brand String/Max CPU Speed/CPU Signature/Processors Core/Microcode Patch**

  Displays the technical specifications for the installed processor.
- **Memory Information**
- **Total Memory**

  Display the total memory size of the installed memory.
- **Memory Frequency**

  Display the frequency information of the installed memory.

☞ **Onboard LAN Information**

☞ **LAN1/LAN2/LAN3/LAN4 MAC Address**

Display LAN1/LAN2/LAN/LAN4 MAC address information.

☞ **System Date**

Set the date following the weekday-month-day- year format.

☞ **System Time**

Set the system time following the hour-minute- second format.

5-2 Advanced Menu

The Advanced menu display submenu options for configuring the function of various hardware components. Select a submenu item, then press Enter to access the related submenu screen.

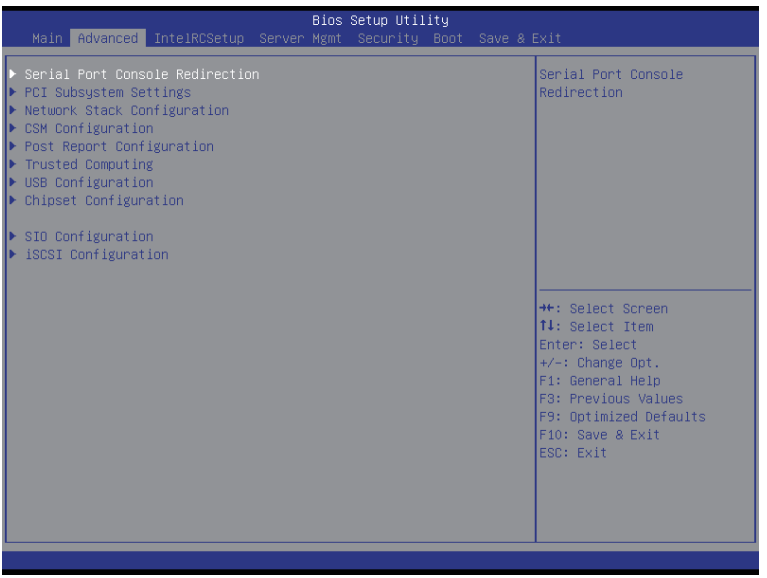

5-2-1 Serial Port Console Redirection

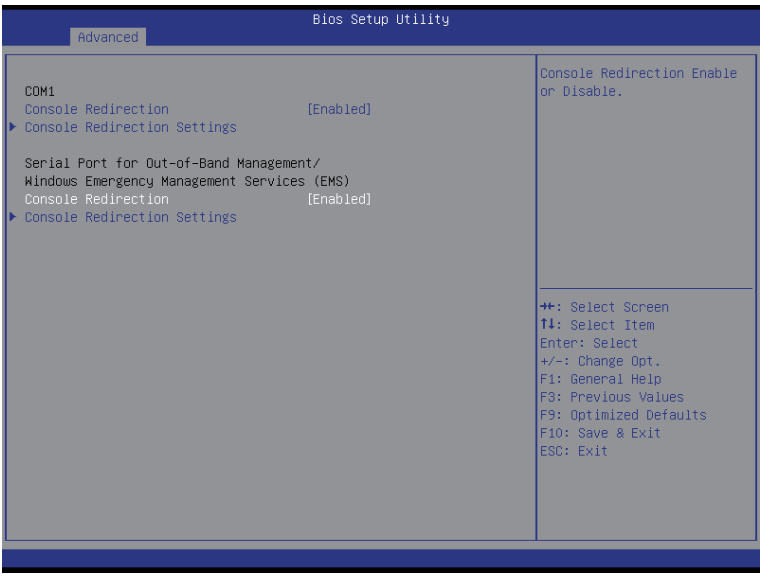

☞ **COM1/Serial Port for Out-of-Band Management EMS Console Redirection Settings**

☞ **Console Redirection** (Note)

Select whether to enable console redirection for specified device. Console redirection enables users to manage the system from a remote location.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **Console Redirection Settings**

☞ **Terminal Type**

Select a terminal type to be used for console redirection.

Options available: VT100/VT100+/ANSI /VT-UTF8. Default setting is **ANSI**.

☞ **Bits per second**

Select the baud rate for console redirection.

Options available: 9600/19200/38400/57600/115200. Default setting is **115200**.

☞ **Data Bits**

Select the data bits for console redirection.

Options available: 7/8. Default setting is **8**.

☞ **Parity**

A parity bit can be sent with the data bits to detect some transmission errors.

Even: parity bi is 0 if the num of 1's in the data bits is even.

Odd: parity bit is 0 if num of 1's in the data bits is odd.

Mark: parity bit is always 1. Space: Parity bit is always 0.

Mark and Space Parity do not allow for error detection.

(Note) Advanced items prompt when this item is defined.

Options available: None/Even/Odd/Mark/Space. Default setting is **None**.

☞ **Stop Bits**

Stop bits indicate the end of a serial data packet. (A start bit indicates the beginning). The standard setting is 1 stop bit. Communication with slow devices may require more than 1 stop bit.
Options available: 1/2. Default setting is **1**.

☞ **Flow Control**

Flow control can prevent data loss from buffer overflow. When sending data, if the receiving buffers are full, a 'stop' signal can be sent to stop the data flow. Once the buffers are empty, a 'start' signal can be sent to re-start the flow. Hardware flow control uses two wires to send start/stop signals.
Options available: None/Hardware RTS/CTS. Default setting is **None**.

☞ **VT-UTF8 Combo Key Support** (Note)

Enable/Disable VT-UTF8 Combo Key Support.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Recorder Mode** (Note)

When this mode enabled, only text will be send. This is to capture Terminal data.
Options available: Enabled/Disabled.
Default setting is **Disabled**.

☞ **Resolution 100x31** (Note)

Enables or disables extended terminal resolution. Default setting is **Enabled**.
Options available: Enabled/Disabled.

☞ **Legacy OS Redirection Resolution** (Note)

On Legacy OS, the number of Rows and Columns supported redirection.
Options available: 80x24/80X25. Default setting is **80x24**.

☞ **Putty KeyPad** (Note)

Select function FunctionKey and KeyPad on Putty.
Options available: VT100/LINUX/XTERMR6/SCO/ESCN/VT400. Default setting is **VT100**.

☞ **Redirection After BIOS POST** (Note)

This option allows user to enable console redirection after O.S has loaded.
Options available: Always Enable/Boot Loader. Default setting is **Always Enable**.

☞ **Out-of-Bnad Mgmt Port**

Microsoft Windows Emerency Management Service (EMS) allows for remote management of a Windows Server OS through a serial port.
Options available: COM1/COM2. Default setting is **COM1**.

(Note) Advanced items prompt when this item is defined.

5-2-2 PCI Subsystem Settings

☞ PCI Express Slot #1/#2/#3/#4/#5 I/O ROM

When enabled, This setting will initialize the device expansion ROM for the related PCI-E slot.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ Onboard LAN#1/#2Controller

Enable/Disable onboard LAN devices.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ Onboard LAN #1/#2 I/O ROM

Enable/Disable onboard LAN devices and initialize device expansion ROM.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ PCI Devices Common Settings

☞ PCI Latency Timer

Value to be programmed into PCI Latency Timer Register.

Options available: 32 PCI Bus Clocks/64 PCI Bus Clocks/96 PCI Bus Clocks/128 PCI Bus Clocks/160 PCI Bus Clocks/192 PCI Bus Clocks/224 PCI Bus Clocks/248 PCI Bus Clocks/.

Default setting is **32 PCI Bus Clocks**.

☞ VGA Palette Snoop

Enable/Disable VGA Palette Tegisters Snooping.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ Above 4G Decoding

Enable/Disable Above 4G Decoding.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **SR-IOV Support**

If system has SR-IOV capable PCIe Devices, this option enables or disables Single Root IO Virtualization Support.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **PCI Express Settings**

Press [Enter] for configuration of advanced items.

5-2-2-1 PCI Express Settings

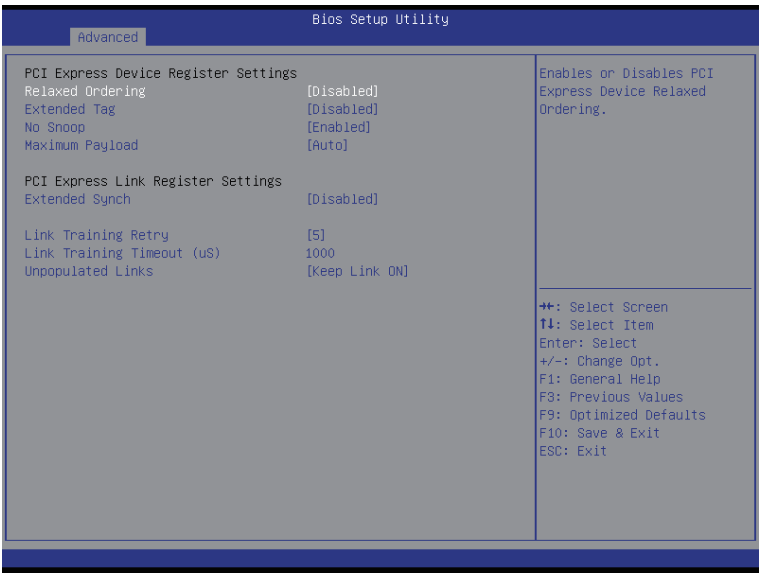

☞ PCI Express Device Register Settings

☞ Relaxed Ordering

Enable/DIsable PCI Express Device Relaxed Ordering feature.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ Extended Tag

Wnen this feature is enabled, the system will allow device to use 8-bit Tag field as a requester.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ No Snoop

Enable/Disable PCI Express Device No Snoop option.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ Maximum Playload

Set maximum playload for PCI Express Device or allow system BIOS to select the value.

Options available: Auto/128 Bytes/256 Bytes/512 Bytes/1024 Bytes/2048 Bytes/4096 Bytes.

Default setting is **Auto**.

☞ PCI Express Link Register Settings

☞ Extended Synch

Wnen this feature is enabled, the system will allow generation of Extended Synchronization patterns.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ Link Training Retry

Define the number of Retry Attempts software wil take to retrain the link if previous training attempt was unsuccessful.

Options available: Disabled/2/3/5.Default setting is **5**.

☞ **Link Training Timeout (us)**

Define the number of Microseconds software will wait before polling 'Link Training' bit in Link Status register. Press <+> / <-> keys to increase or decrease the desired values. Value rang is from 10 to 10000 us.

☞ **Unpopulated Links**

When this item is set to 'Disable Link, the system will operate power save feature for those unpopulated PCI Express links.

Options available: Keep Link ON/ Disable Link. Default setting is **Keep Link ON**.

5-2-3 Network Stack

☞ **Network stack**

Enable/Disable UEFI network stack.

Options available: Enabled/DIsabled. Default setting is **Disabled**.

☞ **Ipv4 PXE Support**(Note)

Enable/Disable Ipv4 PXE feature.

Options available: Enabled/DIsabled. Default setting is **Enabled**.

☞ **Ipv6 PXE Support**(Note)

Enable/Disable Ipv6 PXE feature.

Options available: Enabled/DIsabled. Default setting is **Enabled**.

☞ **PXE boot wait time**(Note)

Press <+> / <-> keys to increase or decrease the desired values.

☞ **Media detect time**(Note)

Press <+> / <-> keys to increase or decrease the desired values.

(Note) This item appears when **Network Stack** is set to **Enabled**.

5-2-4 CSM Configuration

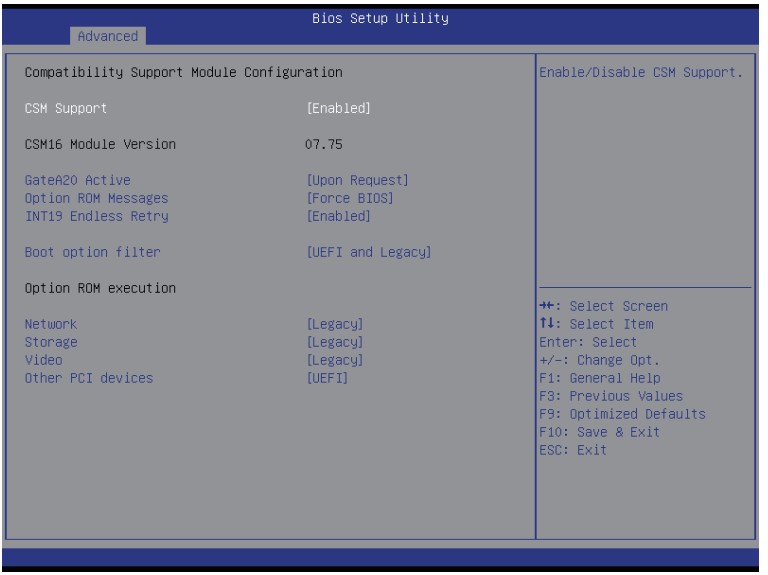

☞ **Compatibility Support Module Configuration**

☞ **CSM Support**

Enable/Disable Compatibility Support Module (CSM) support.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **CSM16 Module Version**

Display CSM Module version information.

☞ **Gate20 Active**

Upon Request: GA20 can be disabled using BIOS services.

Always: Do not allow disabling GA20; this option is useful when any RT code is executed above 1MB.

Options available: Upon Request/Always. Default setting is **Upon Request**.

☞ **Option ROM Messages**

Option ROM Messages.

Options available: Force BIOS/Keep Current. Default setting is **Force BIOS**.

☞ **INT19 Endless Retry**

Enabled: Allowed headless retry boot

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Boot option filter**

Determines which devices system will boot to.

Options available: UEFI and Legacy/Legacy only/UEFI only. Default setting is **UEFI and Legacy**.

☞ **Option ROM execution**

☞ **Network**

Controls the execution UEFI and Legacy PXE OpROM.

Options available: Do not launch/UEFI/Legacy. Default setting is **Legacy**.

☞ **Storage**

Controls the execution UEFI and Legacy Storage OpROM.

Options available: Do not launch/UEFI/Legacy. Default setting is **Legacy**.

☞ **Video**

Controls the execution UEFI and Legacy Video OpROM.

Options available: Do not launch/UEFI/Legacy. Default setting is **Legacy**.

☞ **Other PCI devices**

Determines OpROM execution policy for devices other than network, Storage, or Video.

Options available: UEFI/Legacy. Default setting is **UEFI**.

5-2-5 Post Report Configuration

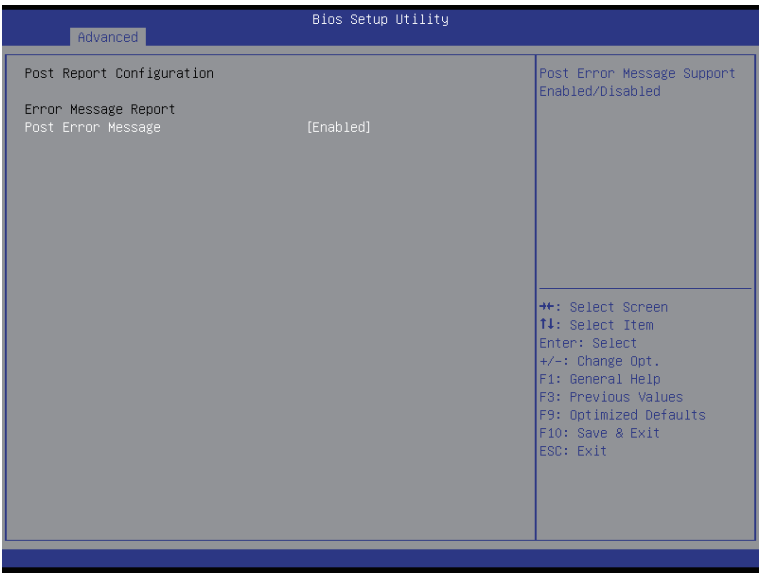

☞ **Post Report Configuration**

☞ **Error Message Report**

☞ **Post Error Message**

Enable/Disable Info Error Message support.

Options available: Enabled/Disabled. Default setting is **Enabled**.

5-2-6 Trusted Computing

☞ **Configuration**

☞ **Security Device Support**

Select Enabled to activate TPM support feature.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **Current Status Information**

Display current TPM status information.

5-2-7 USB Configuration

☞ **USB Configuration**

☞ **USB Devices:**

Display the USB devices connected to the system.

☞ **XHCI Hand-off**

Enable/Disable XHCI (USB 3.0) Hand-off support.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **EHCI Hand-off**

Enable/Disable EHCI (USB 2.0) Hand-off function.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **USB Mass Storage Driver Support**(Note)

Enable/Disable USB Mass Storage Driver Support.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Port 60/64 Emulation**

Enable I/O port 60h/64h emulation support. This should be enabled for the complete USB Keyboard Legacy support for non-USB aware OS.

Options available: Enabled/Disabled. Default setting is **Enabled**.

(Note) This item is present only if you attach USB types of device.

5-2-8 Chipset Configuration

☞ Restore on AC Power Loss (Note)

Defines the power state to resume to after a system shutdown that is due to an interruption in AC power. When set to Last State, the system will return to the active power state prior to shutdown. When set to Stay Off, the system remains off after power shutdown.

Options available: Last State/Stay Off/Power On. The default setting depends on the BMC setting.

☞ Deep Sleep (EuP)

Enable/Disable Deep Sleep mode.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ Fan Curve Mode

Configure ystem fan curve mode

Options available: Full Dpeed Mode/Performance ModeBalanced mode/Energy Saving Mode.

Default setting is **Performance Mode**.

☞ Chassis Opened Warning

Enable/Disable Chassis intrusion alter funtion.

Options available: Enabled/Disabled. Default setting is **Disabled**.

(Note) When the power policy is controlled by BMC, please wait for 15-20 seconds for BMC to save the last power state.

5-9 SIO Configuration

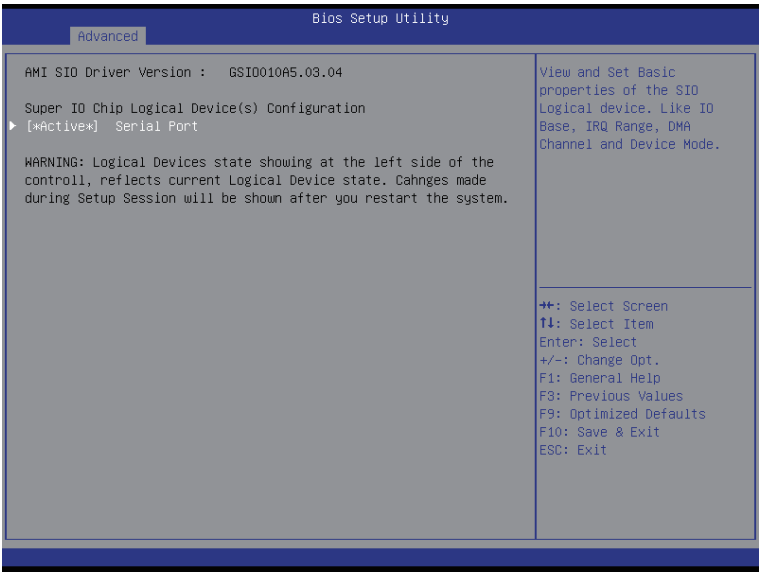

☞ **AMI SIO Driver Version**

Display the AMI SIO driver version information.

☞ **Super IO Chip Logical Device(s) Configuration**

☞ **[*Active*] Serial Port 1**

Press [Enter] for confuguration of advanced items.

☞ **Serial Port 1 Configuration**

☞ **Use This Device**

When enabled allows you to configure the serial port 1 settings. When set to Disabled, displays no configuration for the serial port.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Logical Device Settings:**

☞ **Current:**

Display the Serial Port 1 base I/O addressand IRQ.

☞ **Possible:**

Configure Serial Port 1 base I/O addressand IRQ.

Option available:

Use Automatic Settings

IO=3F8h; IRQ=4; DMA;/

IO=3F8h; IRQ=3,4,5,7,9,10,11,12; DMA;/

IO=2F8h; IRQ=3,4,5,7,9,10,11,12; DMA;/

IO=3E8h; IRQ=3,4,5,7,9,10,11,12; DMA;/

IO=2E8h; IRQ=3,4,5,7,9,10,11,12; DMA;

Default setting is **Use Automatic Settings**.

5-2-10 iSCSI Configuration

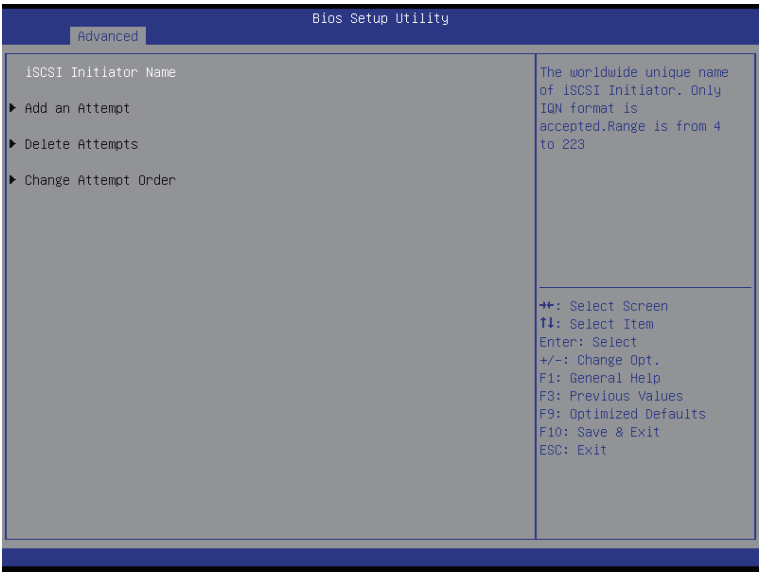

☞ **iSCSI Initiator Name**

☞ **Add an Attempts**

Press [Enter] for configuration of advanced items.

☞ **Delete Attempts**

Press [Enter] for configuration of advanced items.

☞ **Change Attempt Order**

Press [Enter] for configuration of advanced items.

5-3 Intel RC Setup Menu

Intel RC Setup menu displays submenu options for configuring the function of North Bridge and South Bridge. Select a submenu item, then press Enter to access the related submenu screen.

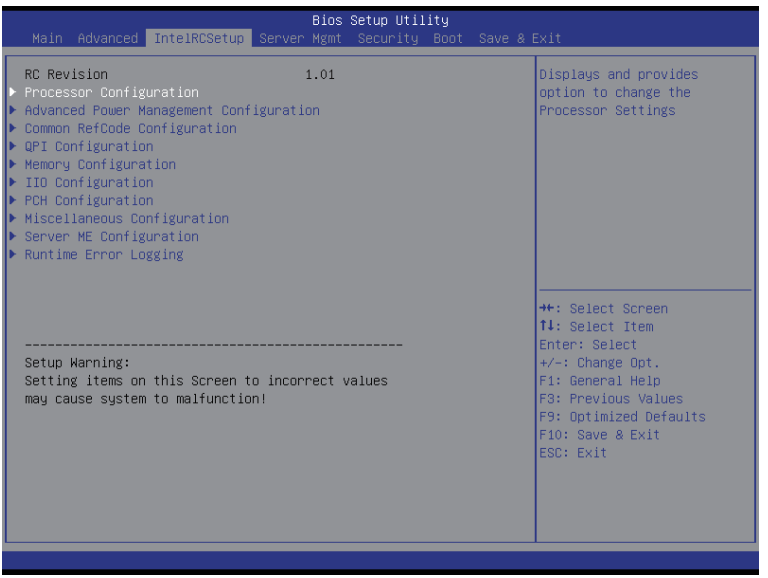

☞ RC Revision

Display Intel RC version information.

5-3-1 Processor Configuration

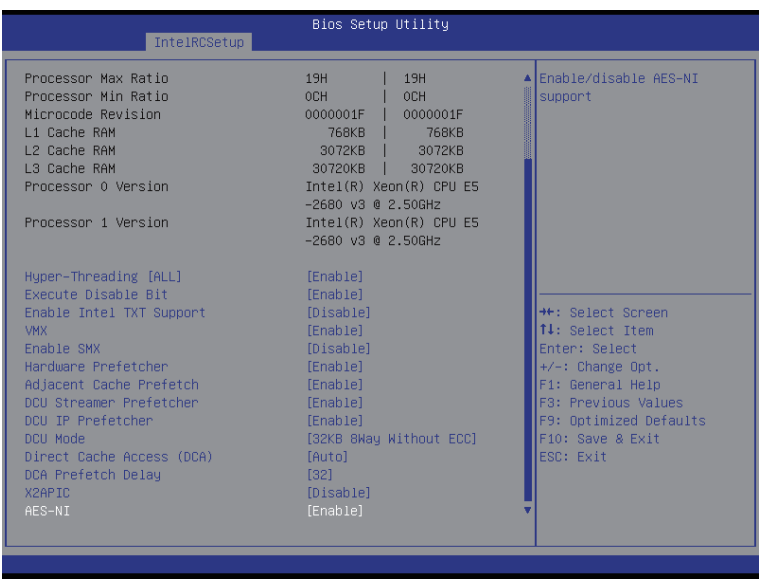

☞ **Processor Configuration**

☞ **Pre-Socket Configuration**

Press [Enter] for configuration of advanced items.

☞ **Processor Socket/Processor ID/Processor Frequency/Processor Max Raito/ Processor Min Raio/Microcode Revision/L1 Cache RAM/L2 Cache RAM/L3 Cache RAM/ Processor 0/1Version**

Displays the technical specifications for the installed processor.

☞ **Hyper-Threading [All]**

The Hyper Threading Technology allows a single processor to execute two or more separate threads concurrently. When hyper-threading is enabled, multi-threaded software applications can execute their threads, thereby improving performance.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Execute Disable Bit**

When enabled, the processor prevents the execution of code in data-only memory pages. This provides some protection against buffer overflow attacks.
When disabled, the processor will not restrict code execution in any memory area. This makes the processor more vulnerable to buffer overflow attacks.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Enable Intel TXT Support**

Enable/Disable Intel Trusted Execution Technology support function.
Options available: Enabled/Disabled. Default setting is **Disabled.**

☞ **VMX (Vanderpool Technology)**

Enable/Disable Vanderpool Technology. This will take effect after rebooting the system.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Enable SMX (Intel Safer Mode Extensions Technology)**

Enable/Disblae Intel Safer Mode Extensions (SMX) support function.
Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **Hardware Prefetcher**

Select whether to enable the speculative prefetch unit of the processor.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Adjacent Cache Line Prefetch**

When enabled, cache lines are fetched in pairs. When disabled, only the required cache line is fetched.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **DCU Streamer Prefetch**

Enable prefetch of next L1 Data line based upon multiple loads in same cache line.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **DCU IP Prefetch**

Enable prefetch of next L1 Data line based upon sequential load history.
Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **DCU Mode**

Configure DCU mode.
Options available: 32KB 8Way Without ECC/16KB 4Way With ECC. Default setting is **32KB 8Way Without ECCC**.

☞ **Direct Cache Access (DCA)**

Options available: Auto/Enabled/Disabled. Default setting is **Auto**.

☞ **DCA Prefetch Delay**

Options available: Disabled/8/16/24/32/40/48/56/64/72/80/88/96/104/112. Default setting is **32**.

☞ **X2APIC**

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **AES-NI**

Enable/Disable AES-NI (Intel Advanced Encryption Standard New Instructions) support function.
Options available: Enabled/Disabled. Default setting is **Enabled**.

5-3-1-1 Pre-Socket Configuration

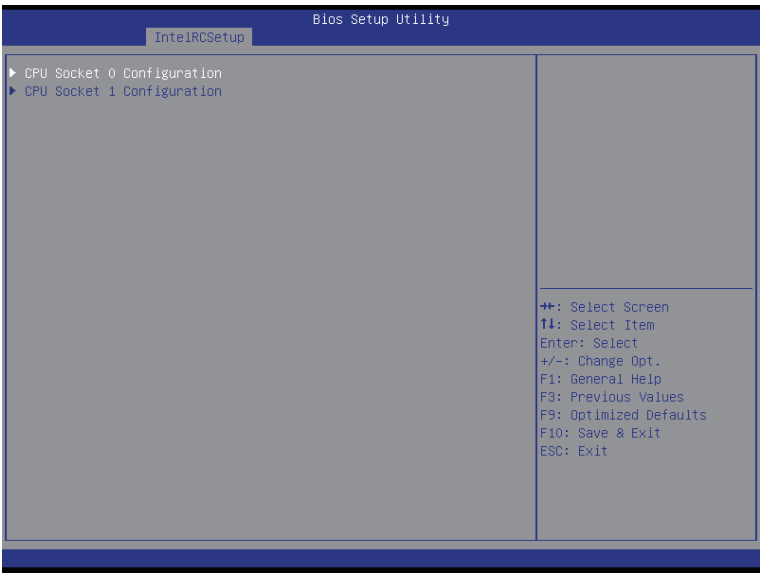

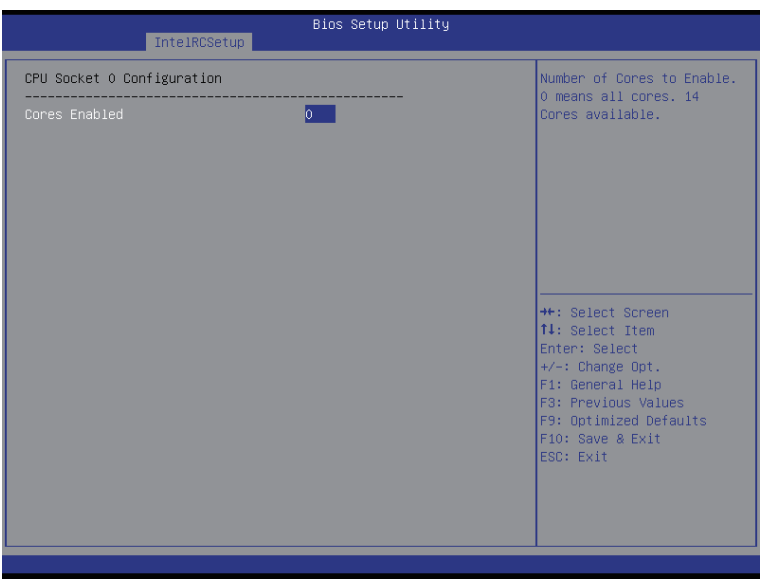

☞ **CPU Socket 0/1 Configuration**

Press [Enter] for configuration of advanced items.

☞ **Cores Enabled (for CPU socket 0/1)**

Number of Cores to enable. 0 means all cores. 14 Cores is available. Press the numeric keys to adjust desired values.

5-3-2 Advanced Power Management Configuration

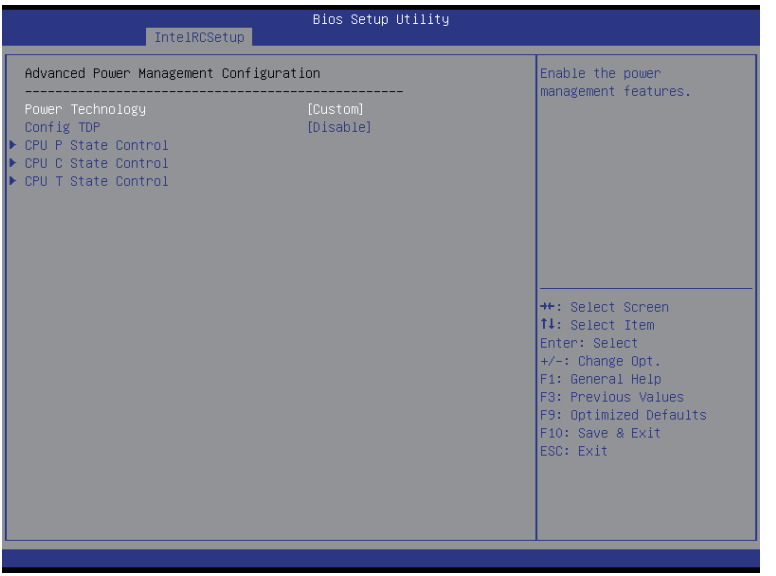

☞ **Advanced Power Management Configuration**

☞ **Power Technology**

Option available:Disable/Energy Efficient/Custom. Default setting is **Energy Efficient**.

☞ **Config TDP**

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **CPU P State Control**

Press [Enter] for configuration of advanced items.

☞ **CPU C State Control**

Press [Enter] for configuration of advanced items.

☞ **CPU T State Control**

Press [Enter] for configuration of advanced items.

5-3-2-1 CPU P State Control

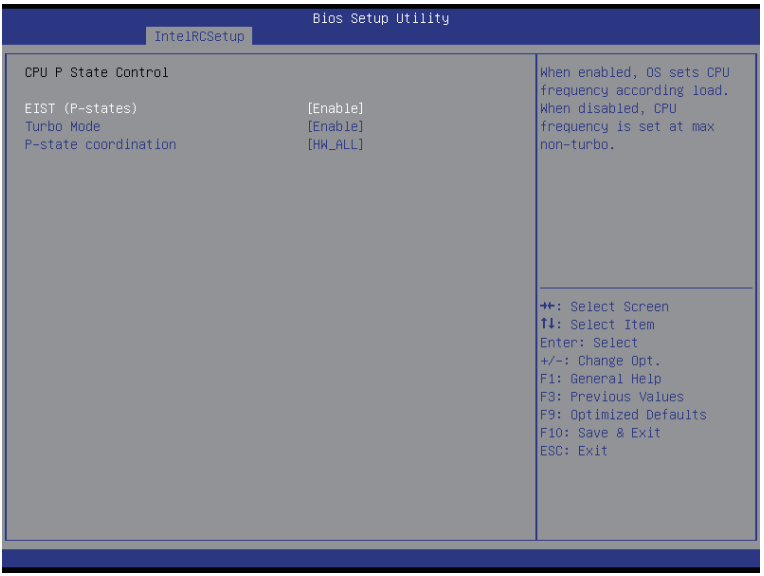

☞ EIST (P-State)

Conventional Intel SpeedStep Technology switches both voltage and frequency in tandem between high and low levels in response to processor load.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ Turbo Mode

When this item is enabled, tje processor will automatically ramp up the clock speed of 1-2 of its processing cores to improve its performance.

When this item is disabled, the processor will not overclock any of its core.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ P-state coordination

In HW_ALL mode, the processor hardware is responsible for coordinating the P-state among logical processors dependencies. The OS is responsible for keeping the P-state request up to date on all logical processors.

In SW_ALL mode, the OS Power Manager is responsible for coordinating the P-state among logical processors with dependencies and must initiate the transition on all of those Logical Processors.

In SW_ANY mode, the OS Power Manager is responsible for coordinating the P-state among logical processors with dependencies and may initiate the transition on any of those Logical Processors.

Options available: HW_ALL/SW_ALL/SW_ANY. Default setting is **HW_ALL**.

5-3-2-2 CPU C State Control

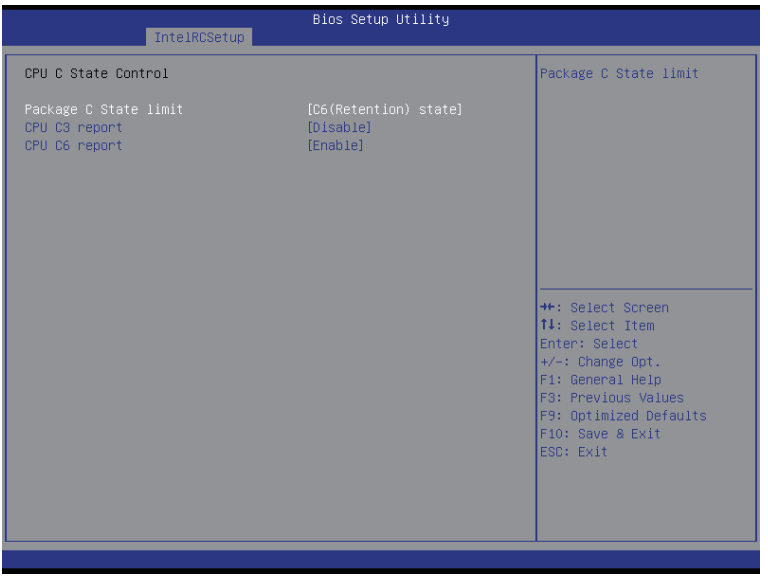

☞ Package C State Limit

Configure state for the C-State package limit.

Options available: C0/C1 state/C2 state/C6(non Retention) state/C6(Retention) state.

Default setting is **C6(non Retention) state**.

☞ CPU C3/C6 Report

Allows you to determine whether to let the CPU enter C3/C6 mode in system halt state. When enabled, the CPU core frequency and voltage will be reduced during system halt state to decrease power consumption. The C3/C6 state is a more enhanced power-saving state than C1.

Options available: Enabled/Disabled.

Default setting for C3 is **Disabled**; default setting for C6 is **Enabled**.

5-3-2-3 CPU T State Control

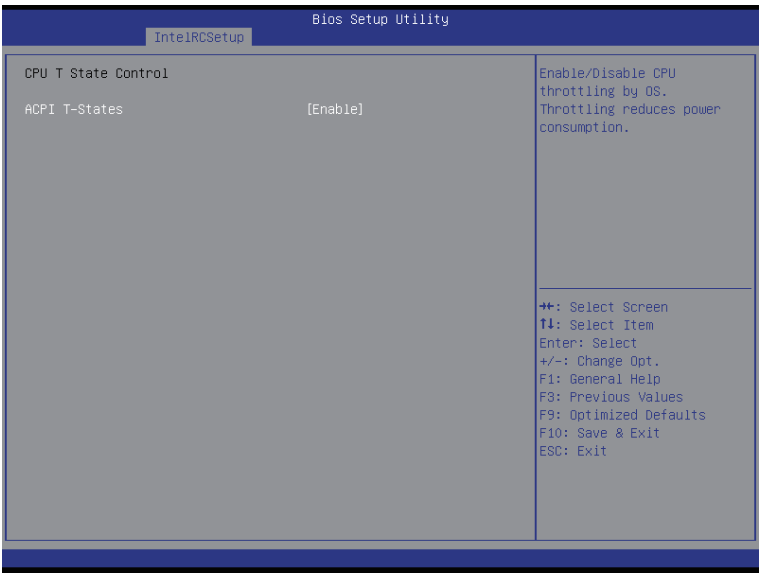

☞ **ACPI T-States**

Enable/Disable CPU throttling by OS. Thorttling reduces power comsumption.

Options available: Enabled/Disabled. Default setting is **Enabled**.

5-3-3 Common RefCode Configuration

☞ **Common RefCode Configuration**

☞ **Isoc Mode**

Options available: Auto/Enabled/Disabled. Default setting is **Auto**.

☞ **Numa (Non-Uniform Memory Access)**

Options available: Enabled/Disabled. Default setting is **Enabled**.

5-3-4 QPI Configuration

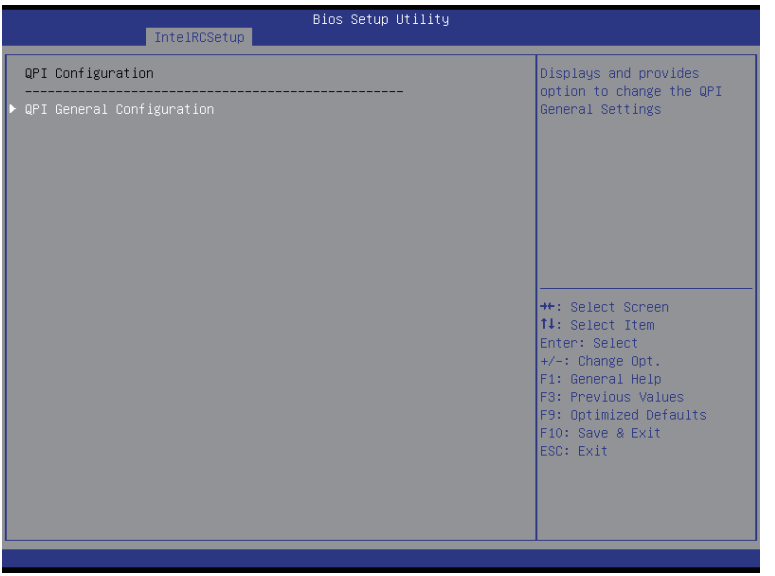

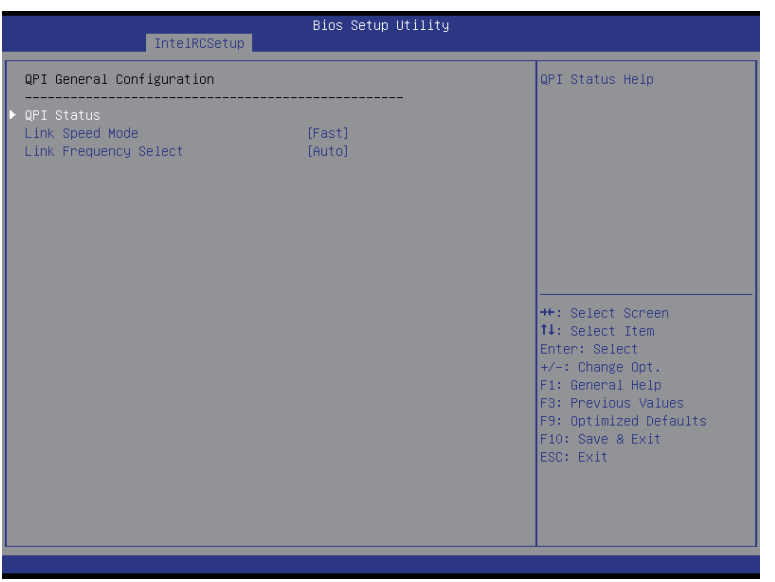

☞ QPI General Configuration

Press [Enter] for configuration of advanced items.

☞ QPI Status

Press [Enter] to view QPI status.

☞ Link Speed Mode

Options available: Slow/Fast. Default setting is **Fast**.

☞ Link Frequency Select

Options available: 6.4GB/s/8.0GB/s/9.6GB/s/Auto/Auto Limited. Default setting is **Auto**.

5-3-5 Memory Configuration

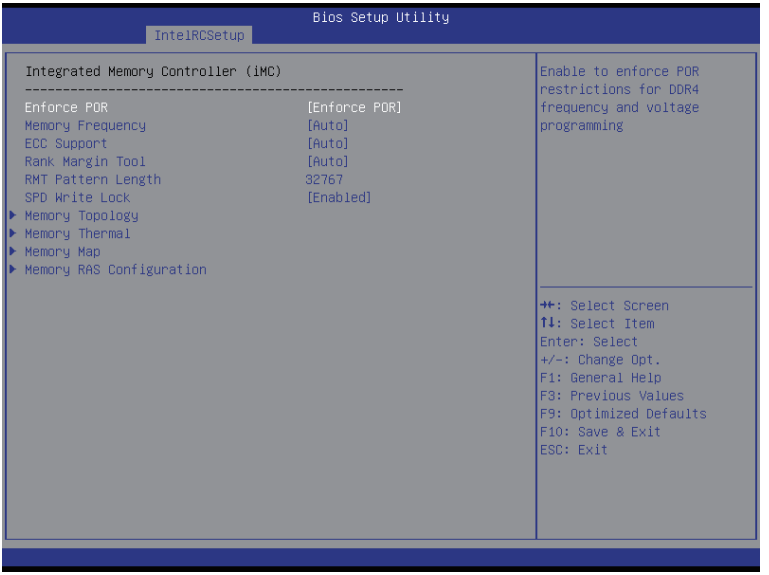

☞ **Integrated Memory Controller (iMC)**

☞ **Enforce POR**

Enable to enforce POR restrictions for DDR4 frequency and voltage programming.

Options available: Enforce POR/Disabled/Enforce Stretch Goals. Default setting is **Enforce POR**.

☞ **Memory Frequency**

Configure memory frequency.

Options available: Auto/1333/1400/1600/1800/1867/2000/2133.

Default setting is **Auto**.

☞ **ECC Support**

Options available: Auto/Disabled/Enabled. Default setting is **Auto**.

☞ **Rank Margin Tool**

Options available: Auto/Disabled/Enabled. Default setting is **Auto**.

☞ **RMT Pattern Length**

Display RMT Pattern Length.

☞ **SPD Write Lock**

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Memory Topology**

Press [Enter] for configuration of advanced items.

☞ **Memory Thermal**

Press [Enter] for configuration of advanced items.

☞ **Memory Map**

Press [Enter] for configuration of advanced items.

☞ **Memory RAS Configuration**

Press [Enter] for configuration of advanced items.

5-3-5-1 Memory Topology

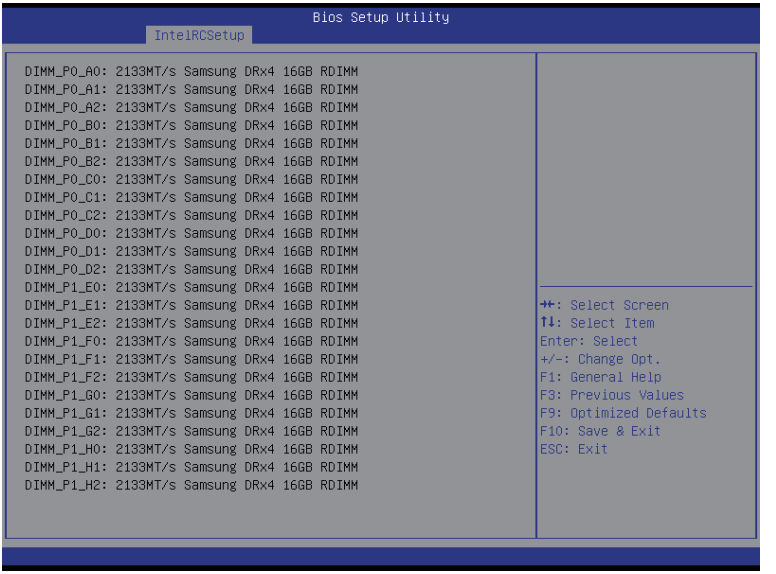

5-3-5-2 Memory Thermal

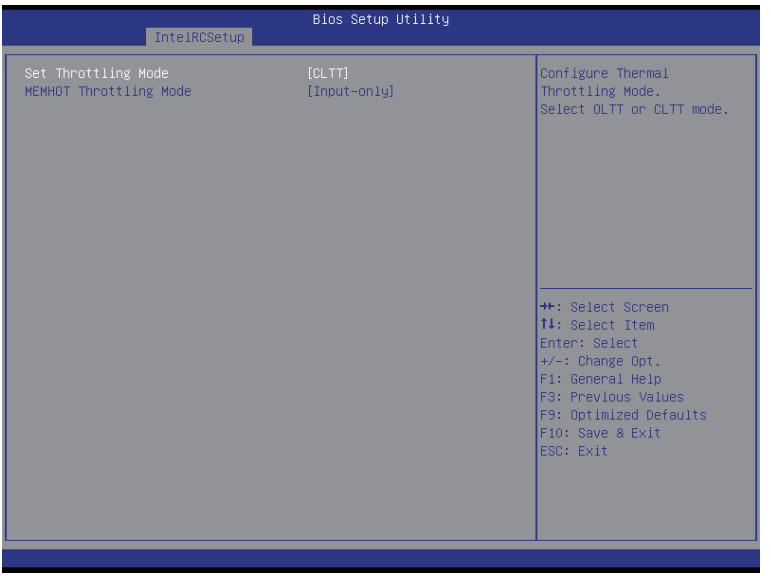

☞ Set Throttling Mode

Configure Thermal Throttling Mode. Select OLTT or CLTT mode.

Options available: Disabled/CLTT Mode. Default setting is **CLTT Mode**.

☞ MEMHOT Throttling Mode

Options available: Disabled/Output-only/Input-only. Default setting is **Input-only**.

5-3-5-3 Memory Map

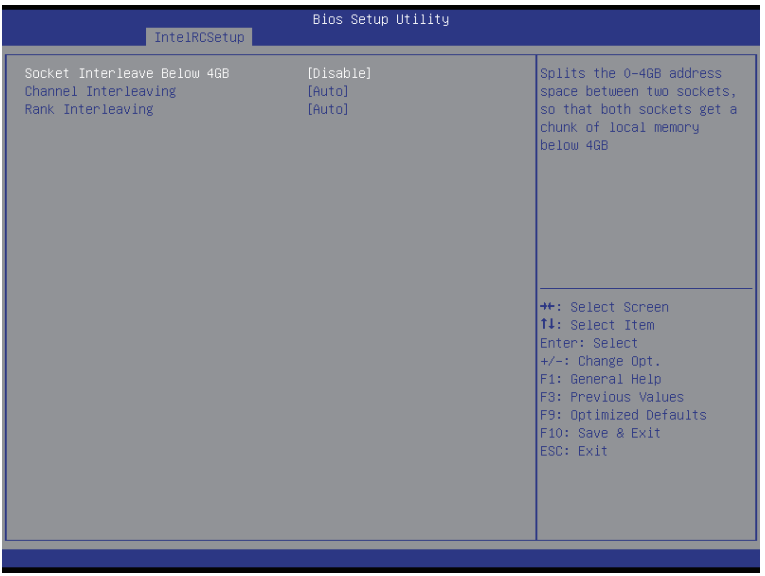

☞ Socket Interleave Below 4GB

Splits the 0-4GB address space between two sockets, so that both sockets get a chunk of local memory below 4GB.

Options available: Disabled/Enabled. Default setting is **Disabled**.

☞ Channel Interleaving

Options available: Auto/1-way Interleave/2-way Interleave/3-way Interleave/4-way Interleave. Default setting is **Auto**.

☞ Rank Interleaving

Options available: Auto/1-way Interleave/2-way Interleave/4-way Interleave/8-way Interleave. Default setting is **Auto**.

5-3-5-4 Memory RAS Configuration

☞ RAS Mode

Enable/Disable RAS modes. Enabling Sparing and Mirroring is not supported. When this item is set to enabled, Sparing will be selected.

Options available: Disable/Mirror/Lockstep Mode. Default setting is **Disabled**.

☞ Lockstep x4 DIMMs

Options available: Auto/Disabled/Enabled. Default setting is **Auto**.

☞ Memory Rank Sparing

Options available: Disabled/Enabled. Default setting is **Disabled**.

☞ Correctable Error Threshold

Press <+> / <-> keys to increase or decrease the desired values.

5-3-6 IIO Configuration

☞ **IIO Configuration**

☞ **EV DFX Features**

Set this option to allow DFX Lock Bits to remain clear.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **IOAT Configuration**

Press [Enter] for configuration of advanced items.

☞ **Intel VT for Directed I/O (VT-d)**

Press [Enter] for configuration of advanced items.

5-3-6-1 IOAT Configuration

☞ **IOAT Configuration**

☞ **Enable IOAT**

Control to enable/disable IOAT (Intel I/O Acceleration Technology) device.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **No Snoop**

Enable/Disable PCI Express Device No Snoop option.

Options available: Enabled/Disabled. Default setting is **Disabled**.

5-3-6-2 Intel VT for Directed I/O (VT-d)

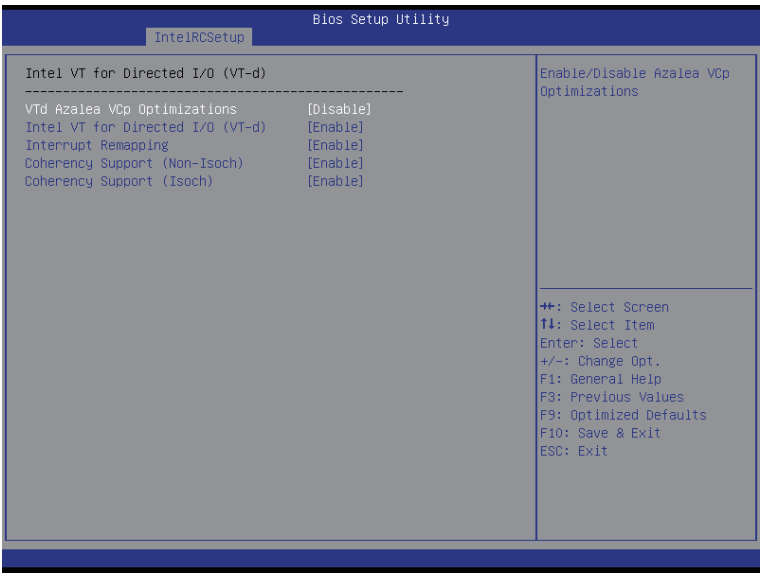

☞ **Intel VT for Directed I/O (VT-d)**

☞ **VT-d Azalea VCp Optimizations**

Enable/Disable Azalea VCp optimizations.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **Intel VT for Directed I/O (VT-d)**

Enable/Disable Intel VT for Directed I/O (VT-d) support function.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Interrupt Remapping**

Enable/Disable interrupt remapping support function.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Coherency Suuport (Non-Isoch)**

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Coherency Suuport (Isoch)**

Options available: Enabled/Disabled. Default setting is **Enabled**.

5-3-7 PCH Configuration

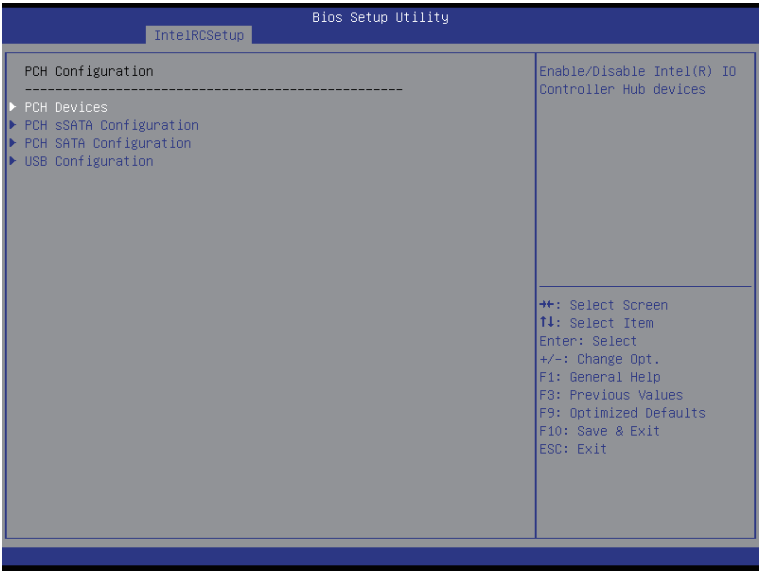

☞ **PCH Configuration**

☞ **PCH Devices**

Press [Enter] for configuration of advanced items.

☞ **PCH sSATA Configuration**

Press [Enter] for configuration of advanced items.

☞ **PCH SATA Configuration**

Press [Enter] for configuration of advanced items.

☞ **USB Configuration**

Press [Enter] for configuration of advanced items.

5-3-7-1 PCH Devices

☞ PCH CRID

Enable/Disable Intel Compatible Revision ID.

Options available: Enabled/Disabled. Default setting is **Disabled**.

5-3-7-2 PCH sSATA Configuration

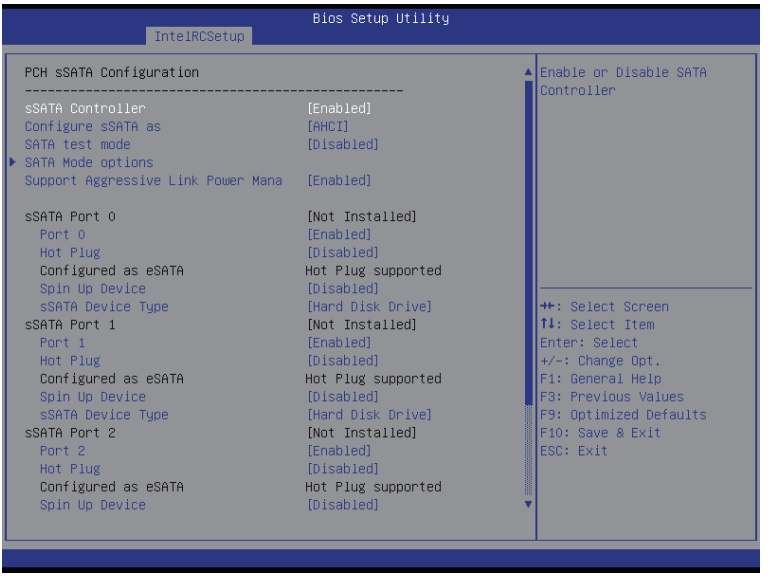

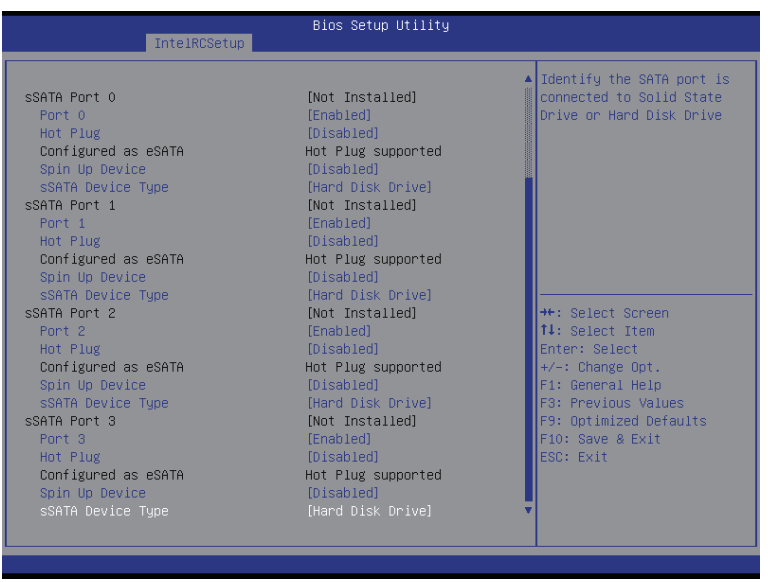

When SATA Type is set to IDE

☞ **PCH sSATA Configuration**

☞ **sSATA Controller(s)**

Enable/Disable sSATA controller.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Configure sSATA as**

Coonfigure on chip SATA type.

IDE Mode: When set to IDE, the SATA controller disables its RAID and AHCI functions and runs in the IDE emulation mode. This is not allowed to access RAID setup utility.

RAID Mode: When set to RAID, the SATA controllerenables both its RAID and AHCI functions. You will be allows access the RAID setup utility at boot time.

ACHI Mode: When set to AHCI,the SATA controller enables its AHCI functionality. Then the RAID function is disabled and cannot be access the RAID setup utility at boot time.

Options available: IDE/RAID/ACHI/Disabled. Default setting is **ACHI**.

☞ **SATA Test Mode**

Enable/Disable SATA Test Mode.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **SATA Mode options**(Note)

Press [Enter] for configuration of advanced items.

☞ **Support Aggressive Link Power Mana**(Note)

Enable PCH to aggressively enter link power state.

Options available: Enabled/Disabled. Default setting is **Enabled**.

(Note) Only Supported When HDD is in **AHCI** or **RAID** Mode.

☞ Alternate Device ID on RAID

Enable /Disable Alternate Device ID on RAID mode.

Options available: Enabled/Disabled. Default setting is **Disabled**.

Please note that this option appears when HDD is in RAID Mode.

☞ sSATA Port 0/1/2/3

The category identifies sSATA type of hard disk that are installed in the computer.

System will automatically detect HDD type.

☞ Port 0/1/2/3

Enable/Disable Port 0/1/2/3 device.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ Hot Plug (for Port 0/1/2/3)(Note)

Enable/Disable HDD Hot-Plug function.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ Configured as eSATA(Note)

Display Hot-Plug supported information.

☞ Spin Up Device (for Port 0/1/2/3)(Note)

On an edge detect from 0 to 1, the PCH starts a COM reset initialization to the device.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ sSATA Device Type

Select sSATA device type.

Options available: Hard Disk Drive/Solid State Drive. Default setting is **Hard Disk Drive**.

(Note) Only Supported When HDD is in **AHCI** or **RAID** Mode.

5-3-7-2-1 SATA Mode Options

When SATA Type is set to IDE/AHCI Mode

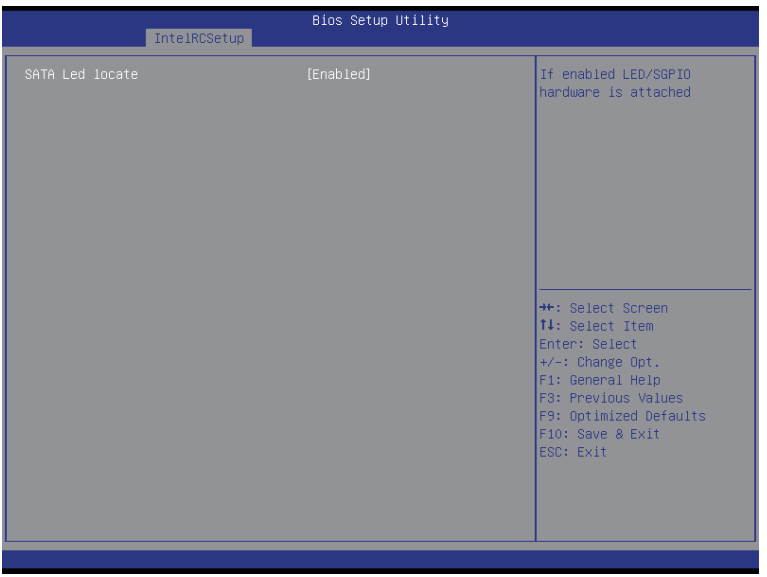

☞ **SATA LED locate**

When this option is enabled, LED/SGPIO hardware is attached.

Options available: Enabled/Disabled. Default setting is **Enabled**.

When SATA Type is set to RAID Mode

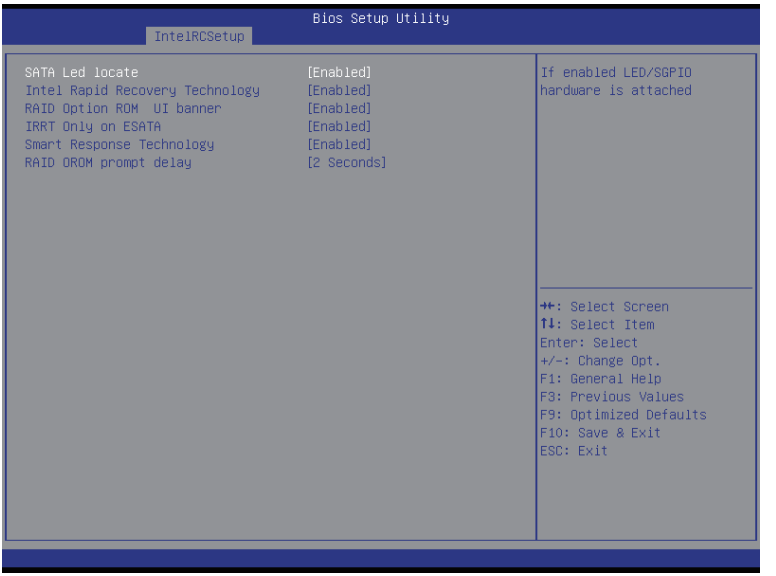

☞ **SATA LED locate**

When this option is enabled, LED/SGPIO hardware is attached.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Intel Rapid Recovery Technology**

Enable/Disable Intel Rapid Recovery Technology support function.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **RAID Option ROM UI banner**

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **IRRT Only on ESATA**

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Smart Response Technology**

Enable/Disable Intel Smart Response Technology support function.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **RAID OROM prompt delay**

Options available: 2 Seconds/4 Seconds/6 Seconds/8 Seconds. Default setting is **2 Seconds**.

5-3-7-3 PCH SATA Configuration

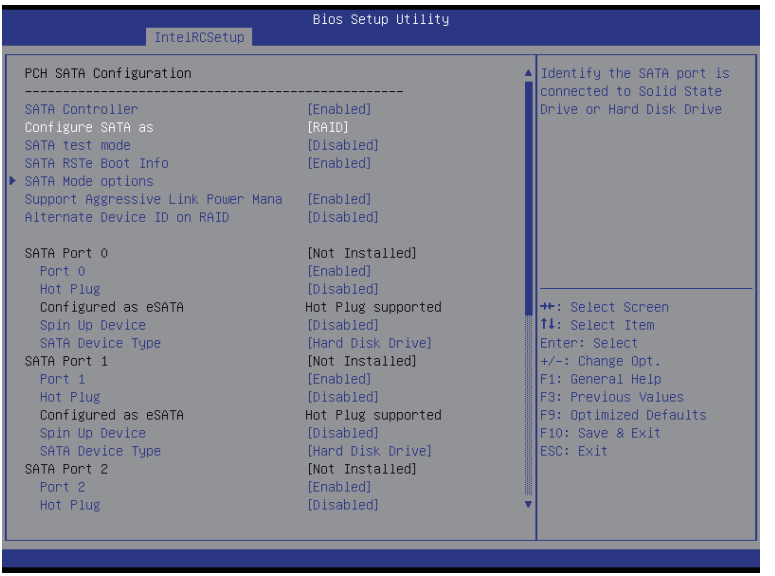

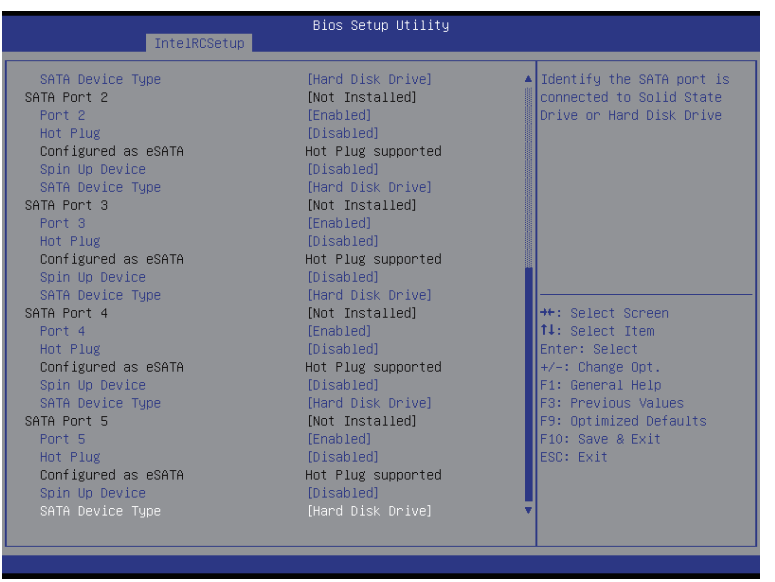

When SATA Type is set to IDE

☞ **PCH SATA Configuration**

☞ **SATA Controller(s)**

Enable/Disable sSATA controller.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Configure sSATA as**

Coonfigure on chip SATA type.

IDE Mode: When set to IDE, the SATA controller disables its RAID and AHCI functions and runs in the IDE emulation mode. This is not allowed to access RAID setup utility.

RAID Mode: When set to RAID, the SATA controllerenables both its RAID and AHCI functions. You will be allows access the RAID setup utility at boot time.

ACHI Mode: When set to AHCI,the SATA controller enables its AHCI functionality. Then the RAID function is disabled and cannot be access the RAID setup utility at boot time.

Options available: IDE/RAID/ACHI/Disabled. Default setting is **ACHI**.

☞ **SATA Test Mode**

Enable/Disable SATA Test Mode.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **SATA RSTe Boot Info**(Note 1)

Enable/Disable SATA RSTe Boot Information.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **SATA Mode options**(Note 2)

Press [Enter] for configuration of advanced items.

(Note 1) Only Supported When HDD is in **RAID** Mode.

(Note 2) Only Supported When HDD is in **AHCI** or **RAID** Mode.

☞ **Support Aggressive Link Power Mana**(Note)

Enable PCH to aggressively enter link power state.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Alternate Device ID on RAID**

Enable /Disable Alternate Device ID on RAID mode.

Options available: Enabled/Disabled. Default setting is **Disabled**.

Please note that this option appears when HDD is in RAID Mode.

☞ **sSATA Port 0/1/2/3/4/5**

The category identifies sSATA type of hard disk that are installed in the computer.

System will automatically detect HDD type.

☞ **Port 0/1/2/3/4/5**

Enable/Disable Port 0/1/2/3 device.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Hot Plug (for Port 0/1/2/3/4/5)**(Note)

Enable/Disable HDD Hot-Plug function.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **Configured as eSATA**(Note)

Display Hot-Plug supported information.

☞ **Spin Up Device (for Port 0/1/2/3/4/5)**(Note)

On an edge detect from 0 to 1, the PCH starts a COM reset initialization to the device.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **sSATA Device Type**

Select sSATA device type.

Options available: Hard Disk Drive/Solid State Drive. Default setting is **Hard Disk Drive**.

(Note) Only Supported When HDD is in **AHCI** or **RAID** Mode.

5-3-7-3-1 SATA Mode Options

When SATA Type is set to IDE/AHCI Mode

☞ **SATA LED locate**

When this option is enabled, LED/SGPIO hardware is attached.

Options available: Enabled/Disabled. Default setting is **Enabled**.

When SATA Type is set to RAID Mode

☞ **SATA LED locate**

When this option is enabled, LED/SGPIO hardware is attached.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Intel Rapid Recovery Technology**

Enable/Disable Intel Rapid Recovery Technology support function.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **RAID Option ROM UI banner**

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Smart Response Technology**

Enable/Disable Intel Smart Response Technology support function.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **RAID OROM prompt delay**

Options available: 2 Seconds/4 Seconds/6 Seconds/8 Seconds. Default setting is **2 Seconds**.

5-3-7-4 USB Configuration

☞ USB Precondition

Precondition work on USB host conteoller and root ports for faster enumeration.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ xHCI Mode

Enable/Disable xHCI (USB 3.0) support function.

Options available: Smart Auto/Enabled/Disabled. Default setting is **Smart Auto**.

5-3-8 Miscellaneous Configuration

☞ **Miscellaneous Configuration**

☞ **Active Video**

Select active Video type.

Options available: Onboard Device/Offboard Device. Default setting is **Offboard Device**.

5-3-9 Server ME Configuration

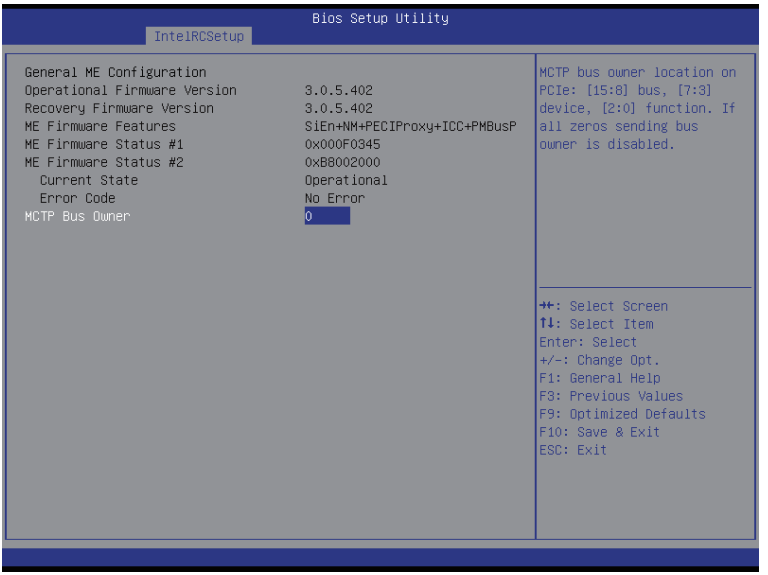

☞ **Greneral ME Configuration**

☞ **Operational Firmware Version**

Display Operational Firmware Version information.

☞ **Recovery Firmware Version**

Display Recovery Firmware Version information.

☞ **ME Firmware Features**

Display ME Firmware features information.

☞ **ME Firmware Status #1/#2**

Display ME Firmware status information.

☞ **Current State (for ME Firmware)**

Display ME Firmware current status information.

☞ **Error Code (for ME Firmware)**

Display ME Firmware status error code.

☞ **MCTP Bus Owner**

Configure MCTP Bus Owner.

5-3-10 Runtime Error Logging

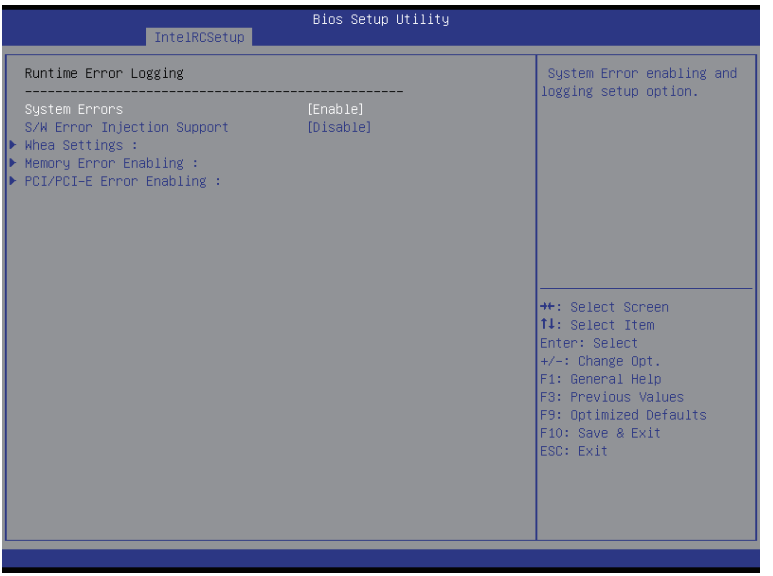

☞ **Runtime Error Logging**

☞ **System Errors**

Enable/Disable system error logging function.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **S/W Error Injection Support**

Enable/Disable software injection error logging function.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **Whea Settings**

Press [Enter] for configuration of advanced items.

☞ **Memory Error Enabling**

Press [Enter] for configuration of advanced items.

☞ **PCI/PCI-E Error Enabling**

Press [Enter] for configuration of advanced items.

5-3-10-1 Whea Setting

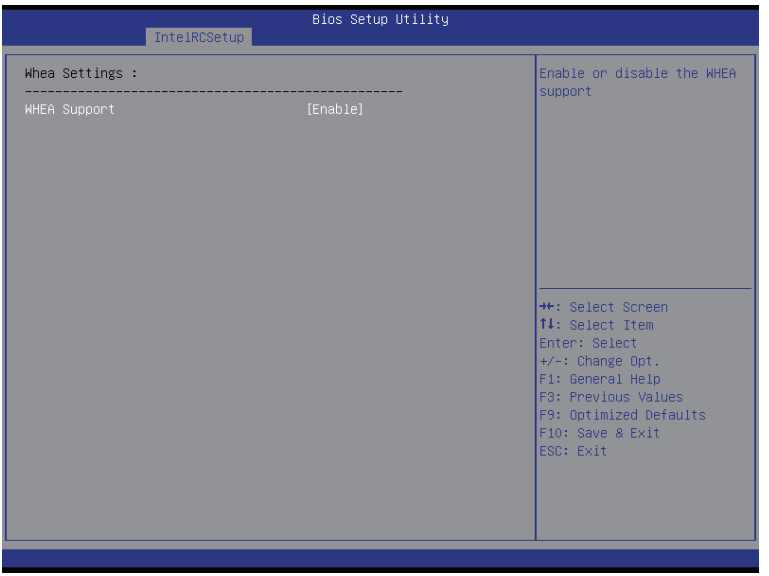

☞ **WHEA Support (Windows Hardware Error Architecture)**

Enable/Disable WHEA Support.

Options available: Enabled/Disabled. Default setting is **Enabled**.

5-3-10-2 Memory Error Enabling

☞ **Memory Error Enabling**

☞ **Un-Correctable Errors disable Memory**

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ **Memory corrected Errors enabling**

Options available: Enabled/Disabled. Default setting is **Disabled**.

5-3-10-3 PCI/PCI Error Enabling

☞ PCI-Ex Error Enable

Options available: Yes/No. Default setting is **No**.

5-4 Server Management Menu

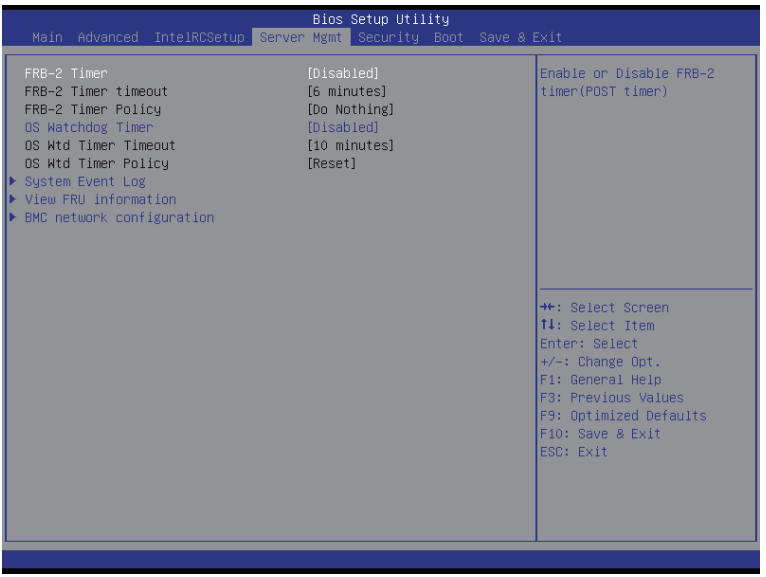

☞ FRB-2 Timer

Enable/Disable FRB-2 timer (POST timer).

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ FRB2 Timer timeout

Configure the FRB2 Timer timeout.

Options available: 3 minutes/4 minutes/5 minutes/6 minutes. Default setting is **6 minutes**.

Please note that this item is configurable when FRB-2 Timer is set to Enabled.

☞ FRB2 Timer Policy

Configure the FRB2 Timer policy.

Options available: Do Nothing/Reset/Power Down. Default setting is **Do Nothing**.

Please note that this item is configurable when FRB-2 Timer is set to Enabled.

☞ OS Watchdog Timer

Enable/Disable OS Watchdog Timer function.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ OS Wtd Timer Timeout

Configure OS Watchdog Timer.

Options available: 5 minutes/10 minutes/15 minutes/20 minutes. Default setting is **10 minutes**.

Please note that this item is configurable when OS Watchdog Timer is set to Enabled.

☞ OS Wtd Timer Policy

Configure OS Watchdog Timer Policy.

Options available: Reset/Do Nothing/Power Down. Default setting is **Reset**.

Please note that this item is configurable when OS Watchdog Timer is set to Enabled.

☞ **System Event Log**

Press [Enter] for configuration of advanced items.

☞ **View FRU Information**

Press [Enter] to view the advanced items.

☞ **BMC network configuration**

Press [Enter] for configuration of advanced items.

5-4-1 System Event Log

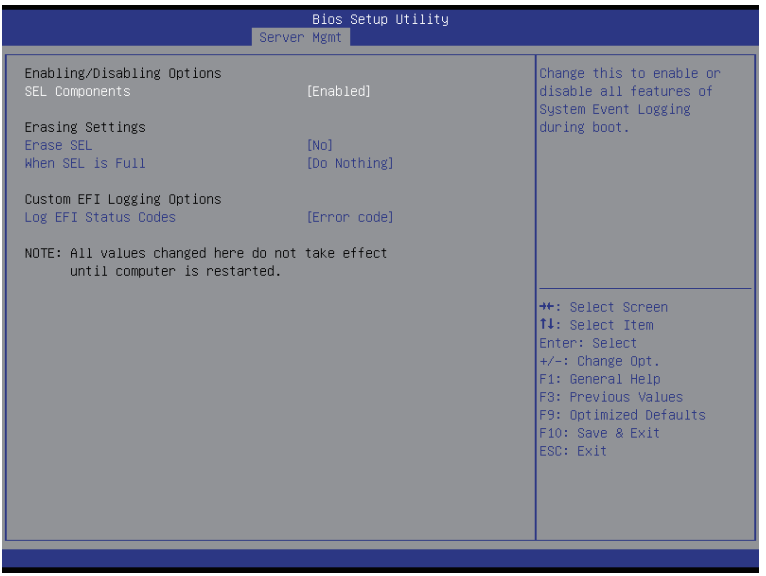

☞ **Enabling/Disabling Options**

☞ **SEL Components**

Change this to enable or disable all features of System Event Logging during boot.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Erasing Settings**

☞ **Erasing SEL**

Choose options for erasing SEL.

Options available: No/Yes, On next reset/Yes, On every reset. Default setting is **No**.

☞ **When SEL is Full**

Choose options for reactions to a full SEL.

Options available: Do Nothing/Erase Immediately. Default setting is **Do Nothing**.

☞ **Custom EFI Logging Options**

☞ **Log EFI Status Codes**

Enable/Disable the logging of EFI Status Codes (if not already converted to legacy).

Options available: Disabled/Both/Error code/Progress code. Default setting is **Error code**.

5-4-2 View FRU Information

The FRU page is a simple display page for basic system ID information, as well as System product information. Items on this window are non-configurable.

R180-F34

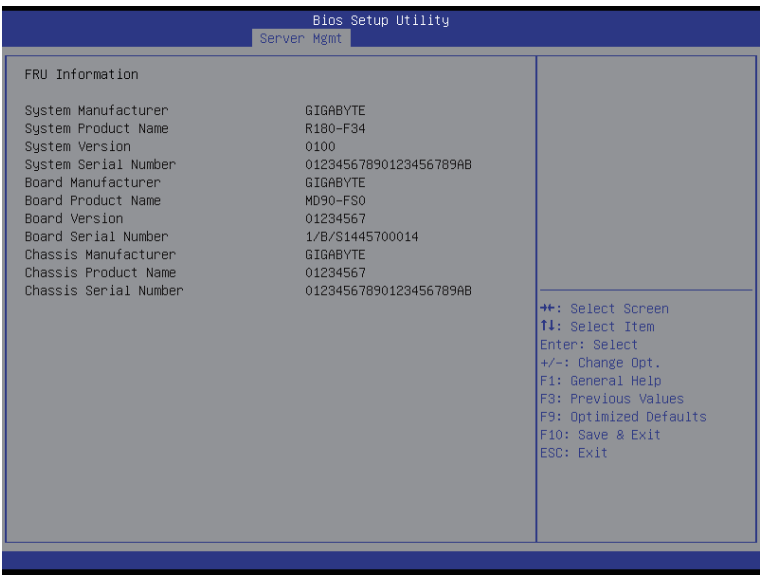

R180-F28

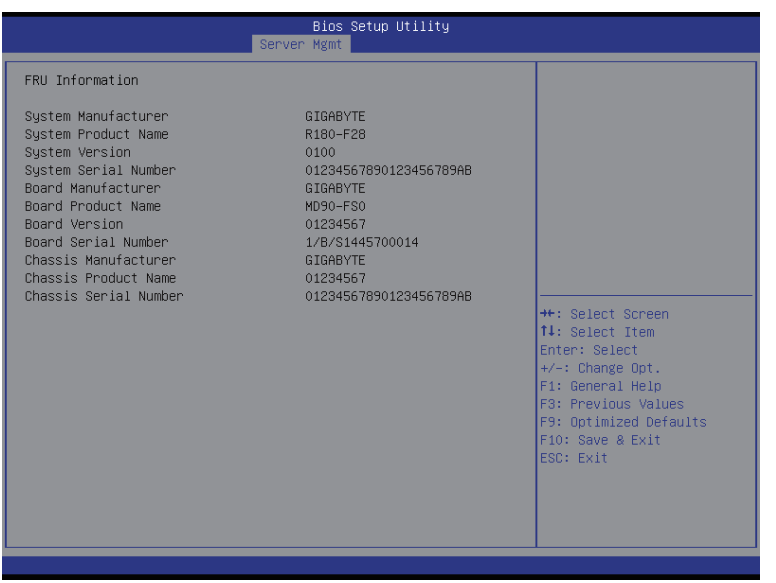

5-4-3 BMC network configuration

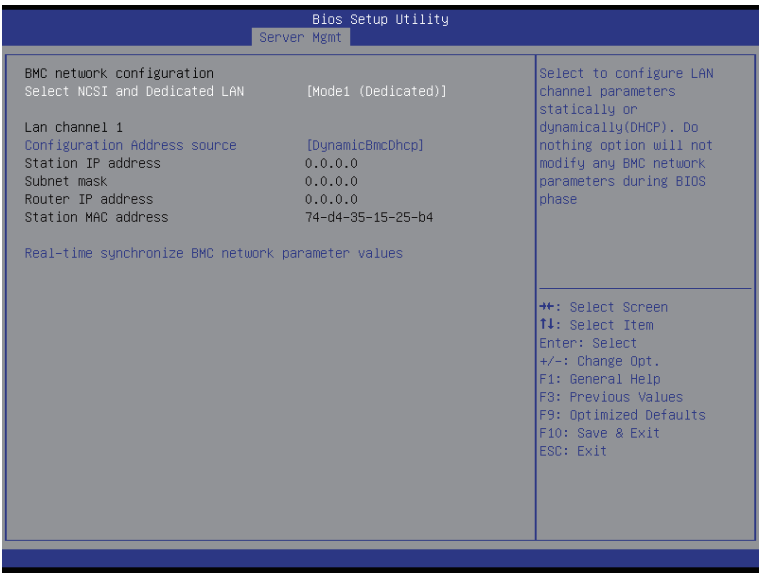

☞ **BMC network configuration**

☞ **Select NCSI and Dedicated LAN**

Switch NCSI and dedicated LAN and send KCS command.

Options available: Mode2(NSCI)/ Mode1 (Dedicated)/Do Nothing. Default setting is **Do Nothing**.

☞ **Lan Channel 1**

☞ **Configuration Address source**

Select to configure LAN channel parameters statically or dynamically (DHCP). Do nothing option willnot modify any BMC network parameters during BIOS phase.

Options available: Unspecified/Static/DynamicBmcDhcp. Default setting is **Unspecified/Static**.

☞ **Station IP Address**

Display IP Address information.

☞ **Subnet mask**

Display Subnet Mask information.

Please note that the IP address must be in three digitals, for example, 192.168.000.001.

☞ **Router IP address**

Display the Router IP Address information.

☞ **Station MAC Address**

Display the MAC Address information.

☞ **Real-time synchronize BMC network parameter values**

Press [Enter] to synchronize BMC network parameter values.

5-5 Security Menu

The Security menu allows you to safeguard and protect the system from unauthorized use by setting up access passwords.

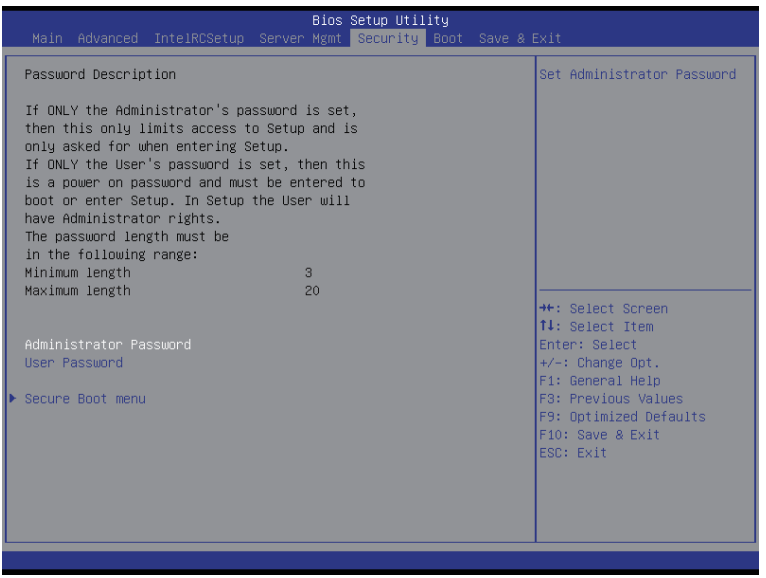

There are two types of passwords that you can set:

- Administrator Password

  Entering this password will allow the user to access and change all settings in the Setup Utility.

- User Password

  Entering this password will restrict a user's access to the Setup menus. To enable or disable this field, a Administrator Password must first be set. A user can only access and modify the System Time, System Date, and Set User Password fields.

☞ **Administrator Password**

Press Enter to configure the Administrator password.

☞ **User Password**

Press Enter to configure the user password.

☞ **Secure Boot menu**

Press [Enter] for configuration of advanced items.

5-5-1 Secure Boot menu

The Secure Boot Menu is applicable when your device is installed the Windows® 8 operatin system.

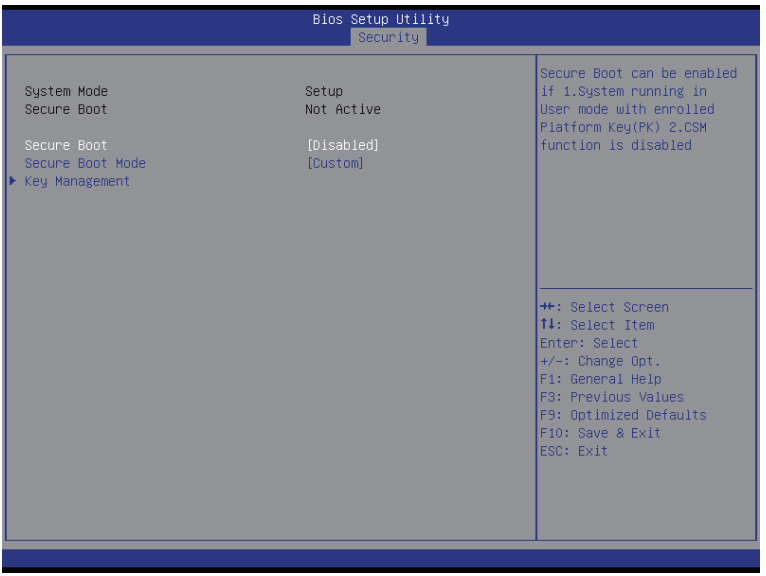

☞ Secure Mode

Display the System secure mode state.

☞ Secure Boot

Display the status of Secure Boot.

☞ Secure Boot

Enable/Disable Secure Boot function.

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ Secure Boot Mode

Secure Boot requires all the applications that are running during the booting process to be pre-signed with valid digital certificates. This way, the system knows all the files being loaded before Windows 8 loads and gets to the login screen have not been tampered with.

When set to Standard, it will automatically load the Secure Boot keys form the BIOS databases.

When set to Custom, you can customize the Secure Boot settings and manually load its keys from the BIOS database.

Options available: Standard/Custom. Default setting is **Custom**.

☞ Key Management(Note)

Press [Enter] for configuration of advanced items.

(Note) Advanced items prompt when this item is set to **Cutom**.

5-5-1-1 Key Management

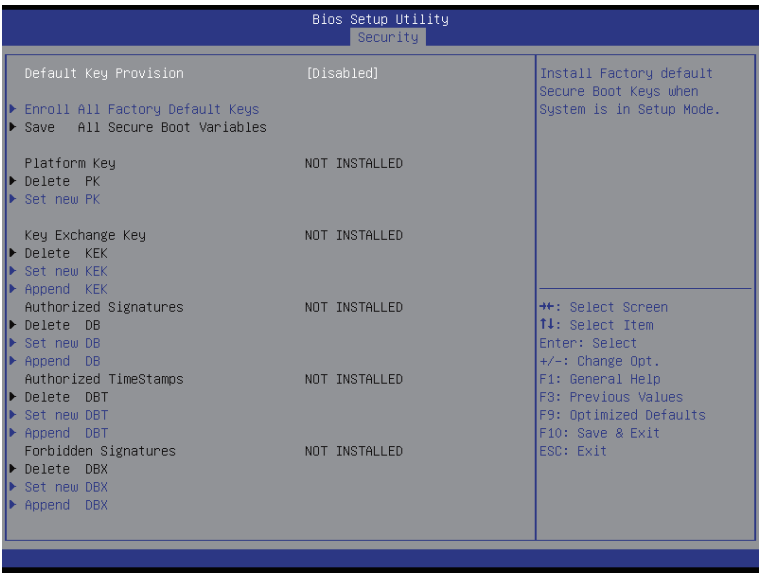

☞ Default Key Provisioning

Force the system to Setup Mode. This will clear all Secure Boot Variables such as Platform Key (PK), Key-exchange Key (KEK), Authorized Signature Database (db), and Forbidden Signaures Database (dbx).

Options available: Enabled/Disabled. Default setting is **Disabled**.

☞ Enroll All Factory Default Keys

Press [Enter] to install all factory default keys.

☞ Save All Secure Boot Variables

Press [Enter] to save all Secure Boot Variables.

☞ Platform Key (PK)

Display the status of Platform Key.

☞ Delete the PK

Press [Enter] to delete the existed PK. Once the PK is deleted, all the system's Secure Boot keys will not be activated.

☞ Set new PK File

Press [Enter] to configure a new PK.

☞ Key Exchange Key Database (KEK)

Display the status of Platform Key.

☞ Delete KEK

Press [Enter] to delete the KEK from your system.

☞ Set new KEK

Press [Enter] to configure a new KEK.

☞ **Append Var to KEK**

Press [Enter] to load additional KEK from a storage devices for an additional db and dbx management.

☞ **Authorized Signature Database (DB)**

Display the status of Authorized Signature Database.

☞ **Delete DB**

Press [Enter] to delete the db from your system.

☞ **Set new DB**

Press [Enter] to configure a new db.

☞ **Append aVar to DB**

Press [Enter] to load additional db from a storage devices.

☞ **Forbidden Signature Database (DBX)**

Display the status of Forbidden Signature Database.

☞ **Delete the DBX**

Press [Enter] to delete the dbx from your system.

☞ **Set DBX from File**

Press [Enter] to configure a new dbx.

☞ **Append Var to DBX**

Press [Enter] to load additional db from a storage devices.

5-6 Boot Menu

The Boot menu allows you to set the drive priority during system boot-up. BIOS setup will display an error message if the legacy drive(s) specified is not bootable.

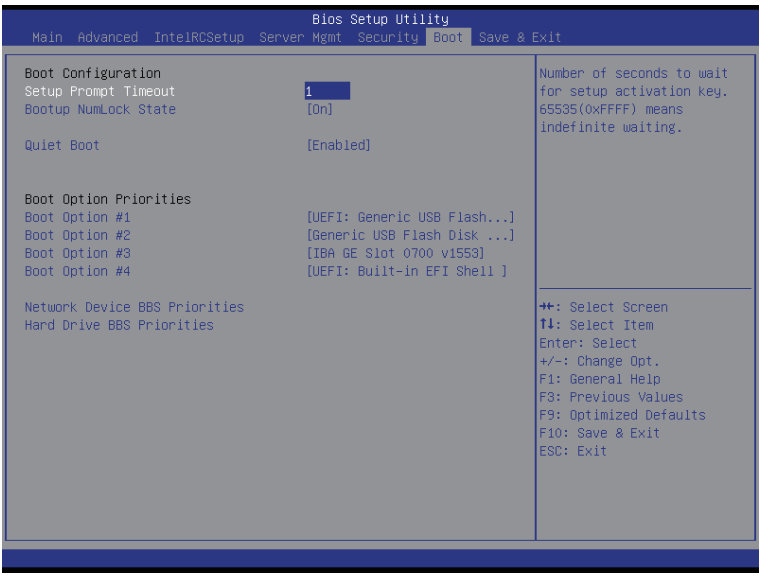

☞ **Boot Configuration**

☞ **Setup Prompt Timeout**

Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting."

Press the numberic keys to input the desired value.

☞ **Bootup NumLock State**

Enable or Disable Bootup NumLock function.

Options available: On/Off. Default setting is **On**.

☞ **Quiet Boot**

Enables or disables showing the logo during POST.

Options available: Enabled/Disabled. Default setting is **Enabled**.

☞ **Boot Option Priorities**

☞ **Boot Option #1/#2/#3#4**

Press Enter to configure the boot priority.

By default, the server searches for boot devices in the following secquence:

1. UEFI device.
2. Hard drive.
3. Network device.
4. USB device

☞ **Network Device BBS Priorities**

Press Enter to configure the boot priority.

☞ **Hard Drive BBS Priorities**

Press Enter to configure the boot priority.

5-7 Save & Exit Menu

The Exit menu displays the various options to quit from the BIOS setup. Highlight any of the exit options then press **Enter**.

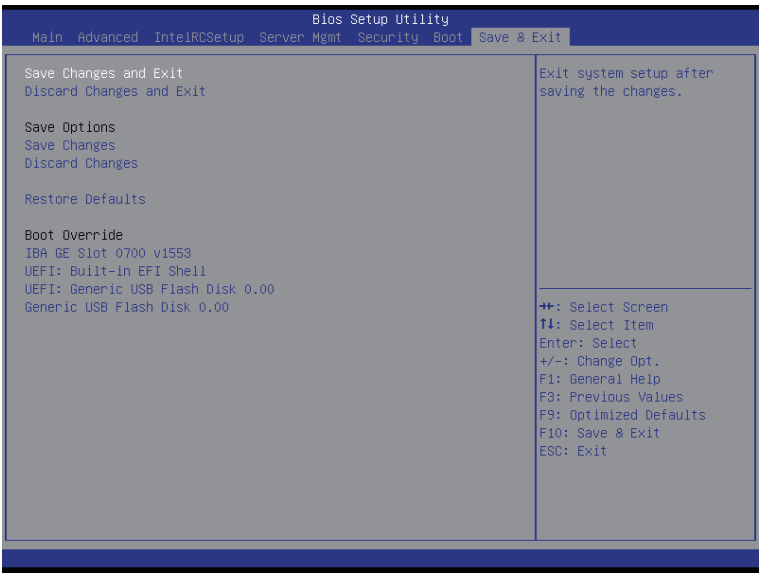

☞ Save Changes and Exit

Saves changes made and close the BIOS setup.

Options available: Yes/No.

☞ Discard Changes and Exit

Discards changes made and exit the BIOS setup.

Options available: Yes/No.

☞ Save Options

☞ Save Changes

Saves changes made in the BIOS setup.

Options available: Yes/No.

☞ Discard Changes

Discards changes made and close the BIOS setup.

Options available: Yes/No.

☞ Restore Defaults

Loads the default settings for all BIOS setup parameters. Setup Defaults are quite demanding in terms of resources consumption. If you are using low-speed memory chips or other kinds of low-performance components and you choose to load these settings, the system might not function properly.

Options available: Yes/No.

☞ **Boot Override**

Press Enter to configure the device as the boot-up drive.

☞ **UEFI: Built-in in EFI Shell**

Press <Enter> on this item to Launch EFI Shell from filesystem device.

5-8 BIOS POST Codes

PEI_CORE_STARTED	0x10
PEI_CAR_CPU_INIT	0x11
// reserved for CPU 0x12 - 0x14	
PEI_CAR_NB_INIT	0x15
// reserved for NB 0x16 - 0x18	
PEI_CAR_SB_INIT	0x19
// reserved for SB 0x1A - 0x1C	
PEI_MEMORY_SPD_READ	0x1D
PEI_MEMORY_PRESENCE_DETECT	0x1E
PEI_MEMORY_TIMING	0x1F
PEI_MEMORY_CONFIGURING	0x20
PEI_MEMORY_INIT	0x21
// reserved for OEM use: 0x22 - 0x2F	
// reserved for AML use: 0x30	
PEI_MEMORY_INSTALLED	0x31
PEI_CPU_INIT	0x32
PEI_CPU_CACHE_INIT	0x33
PEI_CPU_BSP_SELECT	0x34
PEI_CPU_AP_INIT	0x35
PEI_CPU_SMM_INIT	0x36
PEI_MEM_NB_INIT	0x37
// reserved for NB 0x38 - 0x3A	
PEI_MEM_SB_INIT	0x3B
// reserved for SB 0x3C - 0x3E	
// reserved for OEM use: 0x3F - 0x4E	
PEI_DXE_IPL_STARTED	0x4F
//Recovery	
PEI_RECOVERY_AUTO	0xF0
PEI_RECOVERY_USER	0xF1
PEI_RECOVERY_STARTED	0xF2
PEI_RECOVERY_CAPSULE_FOUND	0xF3
PEI_RECOVERY_CAPSULE_LOADED	0xF4
//S3	
PEI_S3_STARTED	0xE0
PEI_S3_BOOT_SCRIPT	0xE1
PEI_S3_VIDEO_REPOST	0xE2
PEI_S3_OS_WAKE	0xE3
//DXE_STATUS_CODE	
DXE_CORE_STARTED	0x60
DXE_NVRAM_INIT	0x61

DXE_SBRUN_INIT	0x62
DXE_CPU_INIT	0x63
//reserved for CPU 0x64 - 0x67	
DXE_NB_HB_INIT	0x68
DXE_NB_INIT	0x69
DXE_NB_SMM_INIT	0x6A
//reserved for NB 0x6B - 0x6F	
DXE_SB_INIT	0x70
DXE_SB_SMM_INIT	0x71
DXE_SB_DEVICES_INIT	0x72
//reserved for SB 0x73 - 0x77	
DXE_ACPI_INIT	0x78
DXE_CSM_INIT	0x79
//reserved for AMI use: 0x7A - 0x7F	
//reserved for OEM use: 0x80 - 0x8F	
DXE_BDS_STARTED	0x90
DXE_BDS_CONNECT_DRIVERS	0x91
DXE_PCI_BUS_BEGIN	0x92
DXE_PCI_BUS_HPC_INIT	0x93
DXE_PCI_BUS_ENUM	0x94
DXE_PCI_BUS_REQUEST_RESOURCES	0x95
DXE_PCI_BUS_ASSIGN_RESOURCES	0x96
DXE_CON_OUT_CONNECT	0x97
DXE_CON_IN_CONNECT	0x98
DXE_SIO_INIT	0x99
DXE_USB_BEGIN	0x9A
DXE_USB_RESET	0x9B
DXE_USB_DETECT	0x9C
DXE_USB_ENABLE	0x9D
//reserved for AMI use: 0x9E - 0x9F	
//reserved for AML use: 0xA0	
DXE_IDE_BEGIN	0xA1
DXE_IDE_RESET	0xA2
DXE_IDE_DETECT	0xA3
DXE_IDE_ENABLE	0xA4
DXE_SCSI_BEGIN	0xA5
DXE_SCSI_RESET	0xA6
DXE_SCSI_DETECT	0xA7
DXE_SCSI_ENABLE	0xA8
DXE_SETUP_VERIFYING_PASSWORD	0xA9
//reserved for AML use: 0xAA	
DXE_SETUP_START	0xAB

DXE_SETUP_INPUT_WAIT	0xAC
DXE_READY_TO_BOOT	0xAD
DXE_LEGACY_BOOT	0xAE
DXE_EXIT_BOOT_SERVICES	0xAF
RT_SET_VIRTUAL_ADDRESS_MAP_BEGIN	0xB0
RT_SET_VIRTUAL_ADDRESS_MAP_END	0xB1
DXE_LEGACY_OPROM_INIT	0xB2
DXE_RESET_SYSTEM	0xB3
DXE_USB_HOTPLUG	0xB4
DXE_PCI_BUS_HOTPLUG	0xB5
DXE_NVRAM_CLEANUP	0xB6
DXE_CONFIGURATION_RESET	0xB7
//reserved for AMI use: 0xB8 - 0xBF	
//reserved for OEM use: 0xC0 - 0xCF	
//PEI_STATUS_CODE	
//Errors	
//Regular boot	
PEI_MEMORY_INVALID_TYPE	0x50
PEI_MEMORY_INVALID_SPEED	0x50
PEI_MEMORY_SPD_FAIL	0x51
PEI_MEMORY_INVALID_SIZE	0x52
PEI_MEMORY_MISMATCH	0x52
PEI_MEMORY_NOT_DETECTED	0x53
PEI_MEMORY_NONE_USEFUL	0x53
PEI_MEMORY_ERROR	0x54
PEI_MEMORY_NOT_INSTALLED	0x55
PEI_CPU_INVALID_TYPE	0x56
PEI_CPU_INVALID_SPEED	0x56
PEI_CPU_MISMATCH	0x57
PEI_CPU_SELF_TEST_FAILED	0x58
PEI_CPU_CACHE_ERROR	0x58
PEI_CPU_MICROCODE_UPDATE_FAILED	0x59
PEI_CPU_NO_MICROCODE	0x59
PEI_CPU_INTERNAL_ERROR	0x5A
PEI_CPU_ERROR	0x5A
PEI_RESET_NOT_AVAILABLE	x5B
//reserved for AMI use: 0x5C - 0x5F	
//Recovery	
PEI_RECOVERY_PPI_NOT_FOUND	0xF8
PEI_RECOVERY_NO_CAPSULE	0xF9
PEI_RECOVERY_INVALID_CAPSULE	0xFA
//reserved for AMI use: 0xFB - 0xFF	

//S3 Resume	
PEI_MEMORY_S3_RESUME_FAILED	0xE8
PEI_S3_RESUME_PPI_NOT_FOUND	0xE9
PEI_S3_BOOT_SCRIPT_ERROR	0xEA
PEI_S3_OS_WAKE_ERROR	0xEB
//reserved for AMI use: 0xEC - 0xEF	
// DXE_STATUS_CODE	
DXE_CPU_ERROR	0xD0
DXE_NB_ERROR	0xD1
DXE_SB_ERROR	0xD2
DXE_ARCH_PROTOCOL_NOT_AVAILABLE	0xD3
DXE_PCI_BUS_OUT_OF_RESOURCES	0xD4
DXE_LEGACY_OPROM_NO_SPACE	0xD5
DXE_NO_CON_OUT	0xD6
DXE_NO_CON_IN	0xD7
DXE_INVALID_PASSWORD	0xD8
DXE_BOOT_OPTION_LOAD_ERROR	0xD9
DXE_BOOT_OPTION_FAILED	0xDA
DXE_FLASH_UPDATE_FAILED	0xDB
DXE_RESET_NOT_AVAILABLE	0xDC
//reserved for AMI use: 0xDE - 0xDF	

5-9 BIOS POST Beep code

5-9-1 PEI Beep Codes

# of Beeps	Description
1	Memory not Installed.
1	Memory was installed twice (InstallPeiMemory routine in PEI Core called twice)
2	Recovery started
3	DXEIPL was not found
3	DXE Core Firmware Volume was not found
4	Recovery failed
4	S3 Resume failed
7	Reset PPI is not available

5-9-2 DEX Beep Codes

# of Beeps	Description
1	Invalid password
4	Some of the Architectural Protocols are not available
5	No Console Output Devices are found
5	No Console Input Devices are found
6	Flash update is failed
7	Reset protocol is not available

5-10 BIOS Recovery Instruction

The system has an embedded recovery technique. In the event that the BIOS becomes corrupt the boot block can be used to restore the BIOS to a working state. To restore your BIOS, please follow the instructions listed below:

Recovery Instruction:

1. Change xxx.ROM to amiboot.rom.
2. Copy amiboot.rom and AFUDOS.exe to USB diskette.
3. Setting BIOS Recovery jump to enabled status.

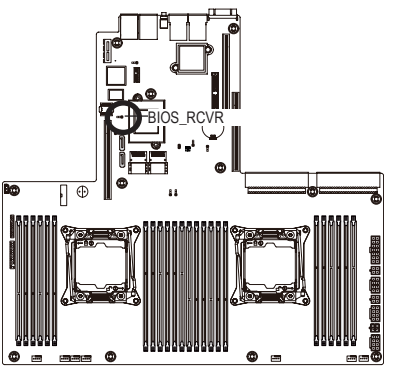

4. Boot into BIOS recovery.
5. Run Proceed with flash update.
6. BIOS update.